



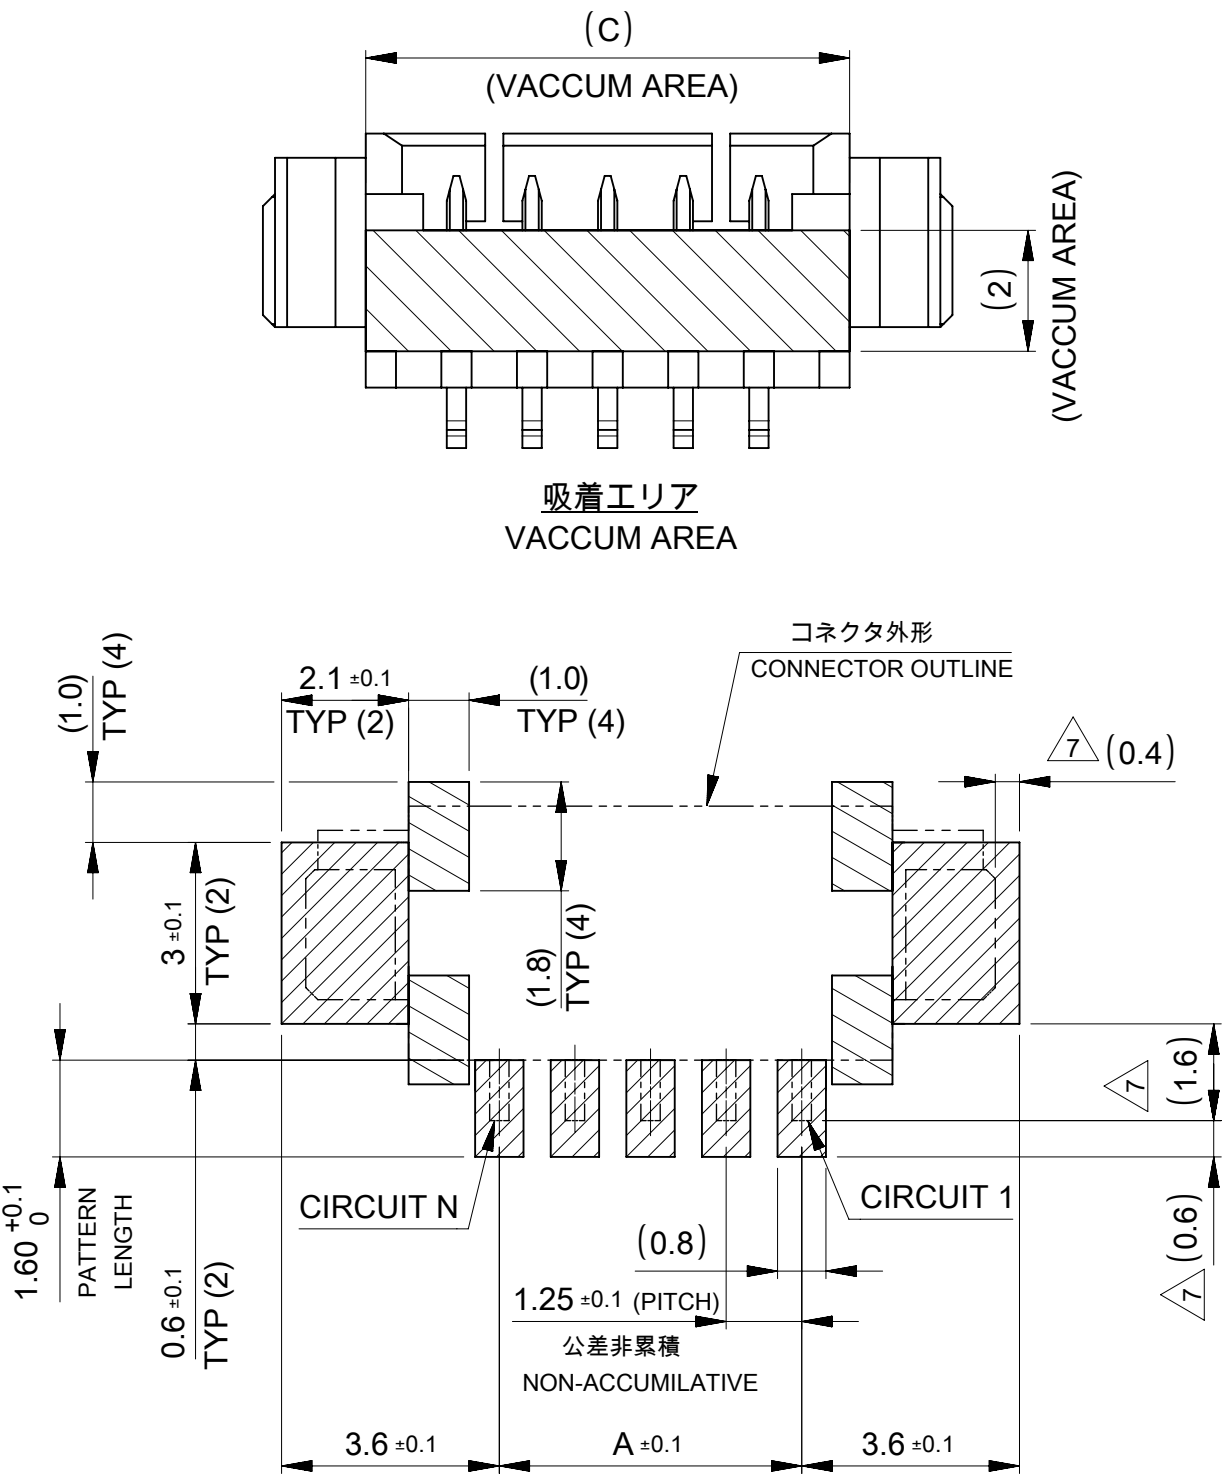

推奨基板レイアウト (実装面側)
RECOMMENDED P.C.B LAYOUT : COMPONENT SIDE
(参考 : 基板厚 1.0mm, メタルマスク厚さ: 0.15mm, マスク開口率:100%)
(REFERENCE : P.C.B THICKNESS 1.0mm, STENCIL THICKNESS: 0.15mm, APERTURE:100%)

 : パターンおよびはんだ禁止エリア
RESTRICTED AREA
NO PCB COMPONENTS AND SOLDER ALLOWED

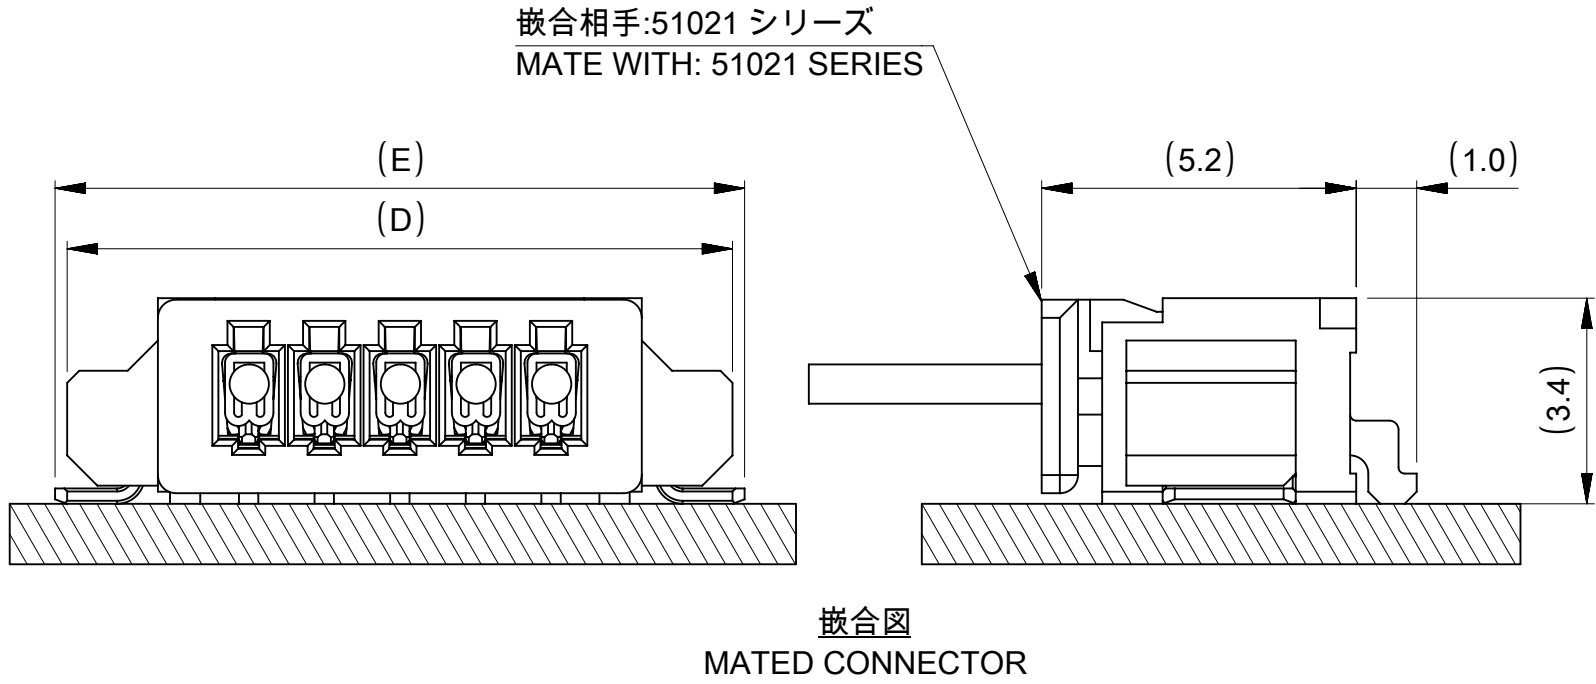


NOTES

 コネクタ外形からパッドまでの寸法を示す。
DIMENSIONS FROM CONNECTOR OUTLINE TO PAD

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex PICOBLADE 1.25 HEADER ASSY SMT RIGHT ANGLE GOLD PLATING TYPE				
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)											
ANGULAR TOL		±	3.0 °	EC NO: 643451 DRWN: SOBARA01 2019/04/08 CHK'D: SAKIYAMA 2021/05/27 APPR: KOMURAKAMI 2021/05/27			PRODUCT CUSTOMER DRAWING				
4 PLACES		±	0.2								
3 PLACES		±	0.2								
2 PLACES		±	0.2								
1 PLACE		±	0.2								
0 PLACES		±	0.2	INITIAL REVISION:			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
				DRWN: SOBARA01 2018/09/13 APPR: TKANEKO 2018/09/28			532610000-SD		PSD	000	C
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				A2-SIZE	53261	SEE CHART OF SHEET3		GENERAL		2 OF 4	

DOCUMENT STATUS	P1	RELEASE DATE	2021/05/27	10:21:18
-----------------	----	--------------	------------	----------

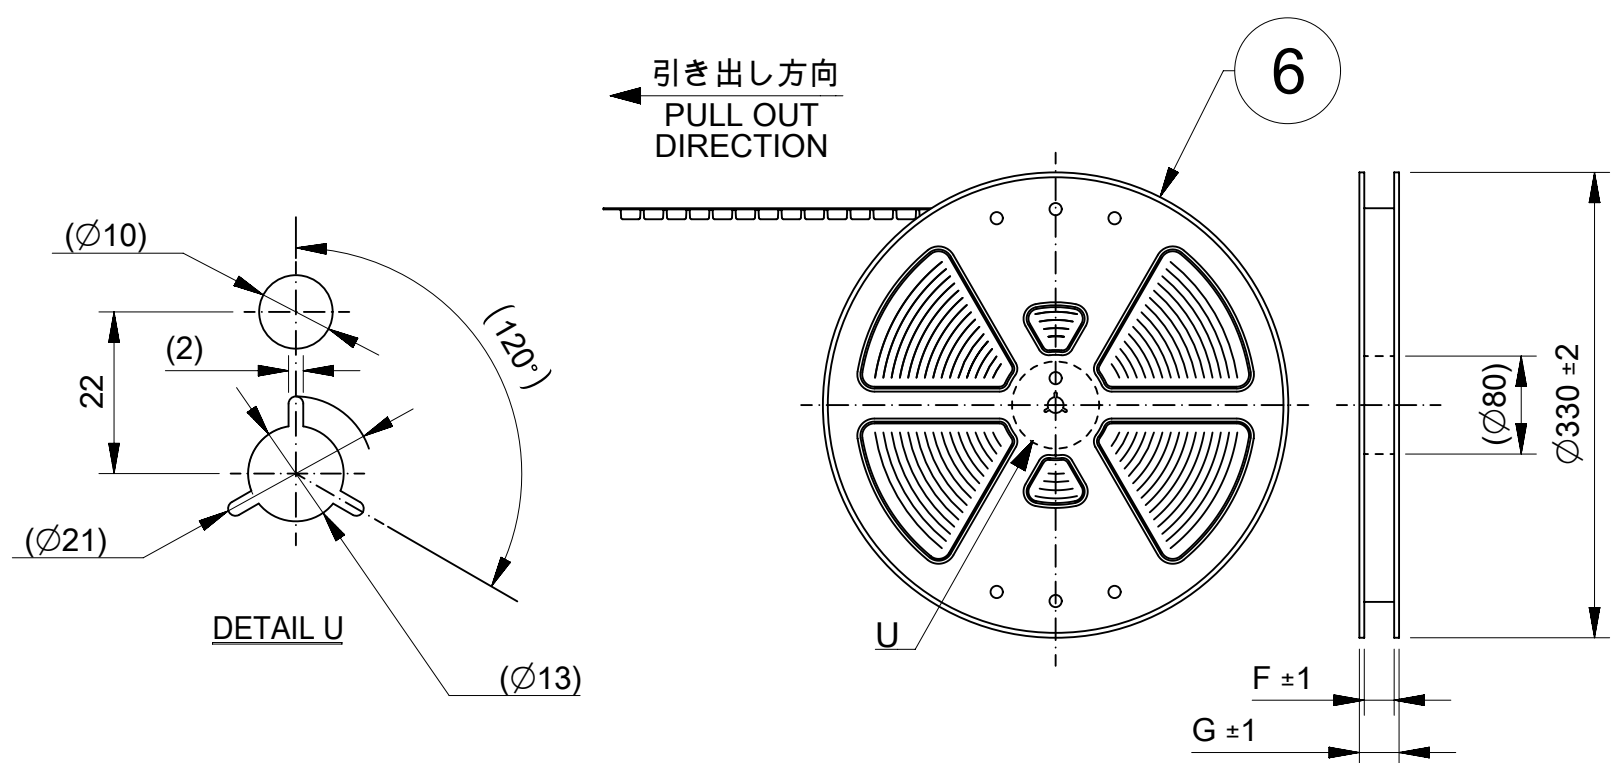

注釈 NOTE

- 8 材料: TABLE 2参照
MATERIAL: REFER TO TABLE 2

9 コネクタハウジング平面部
CONNECTOR HOUSING FLAT AREA.

10. トップテープの剥離強度はIEC 60286-3に準拠。
TOP TAPE PEELING FORCE IS DEFINED BY IEC 60286-3.

11. 本製品は乾燥剤入りハイバリア梱包仕様である。
THIS PRODUCT IS HIGH BARRIER PACKAGE WITH DESICCANT.

12. 梱包数量: 1000個/リール
NUMBER OF CONNECTOR: 1000PCS/REEL



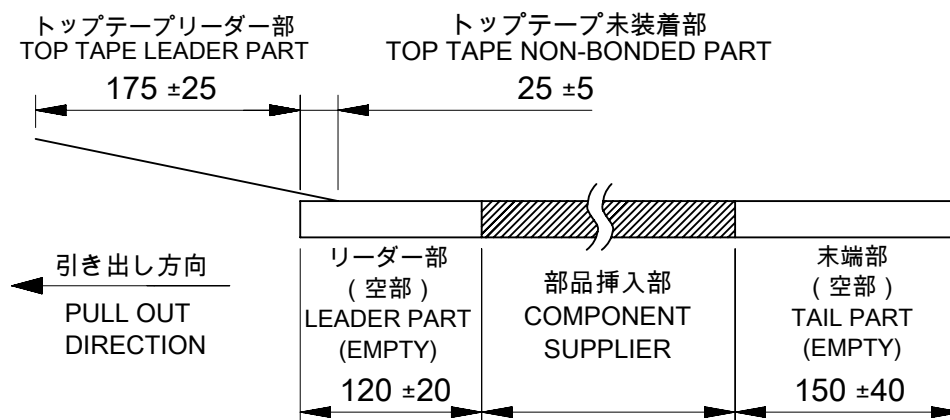


TABLE 2

番号 NO.	部品 PART	材質 MATERIAL
④	エンボステープ EMBOSSSED TAPE	ポリプロピレン(PP) POLYPROPYLENE(PP)
⑤	トップテープ TOP TAPE	ポリエチレンフラノエート (PEF)、その他 POLYETHYLENE (PEF), ETC
⑥	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED >


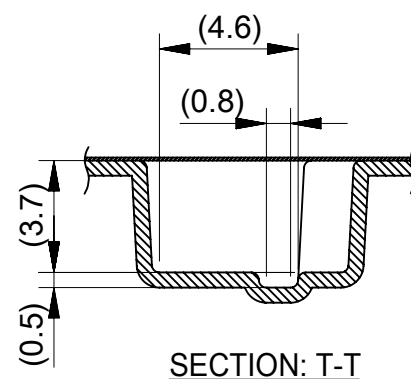


△14 発注番号
ORDER NUMBER
53261*0**

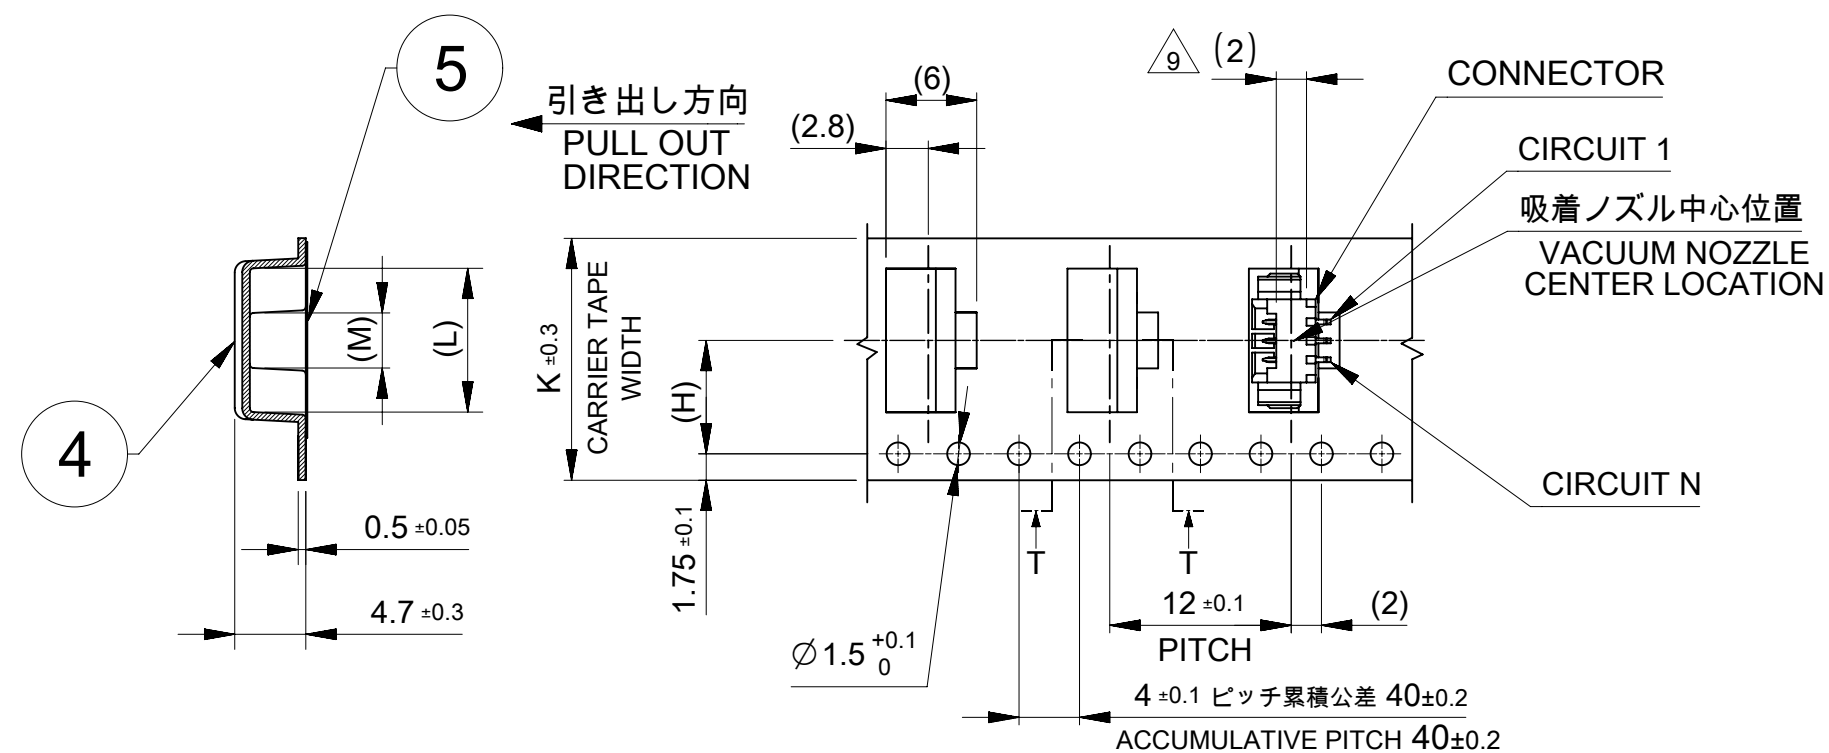

532617015	532614015	15
532617014	532614014	14
532617013	532614013	13
532617012	532614012	12
532617011	532614011	11
532617010	532614010	10
532617009	532614009	9
532617008	532614008	8
532617007	532614007	7
532617006	532614006	6
532617005	532614005	5
532617004	532614004	4
532617003	532614003	3
532617002	532614002	2
GOLD PLATING THICKNESS 0.38micro-meters MIN	GOLD PLATING THICKNESS FLASH	極数 CIRCUIT
発注番号 ORDER NO.  14		
梱包形態 : エンボス梱包 PACKAGING : EMBOSSED TAPE AND REEL		

18.7	24.5	42	40.4	20.2	49.4	45.4	15
17.45	23.25						14
16.2	22						13
14.95	20.75	32	28.4	14.2	37.4	33.4	12
13.7	19.5						11
12.45	18.25						10
11.2	17	24	-	11.5	29.4	25.4	9
9.95	15.75						8
8.7	14.5						7
7.45	13.25						6
6.2	12						5
4.95	10.75						4
3.7	9.5						16
2.45	8.25	2					
M	L	キャリアテープ幅 K CARRIER TAPE WIDTH G	J	H	G	F	極数 CIRCUIT

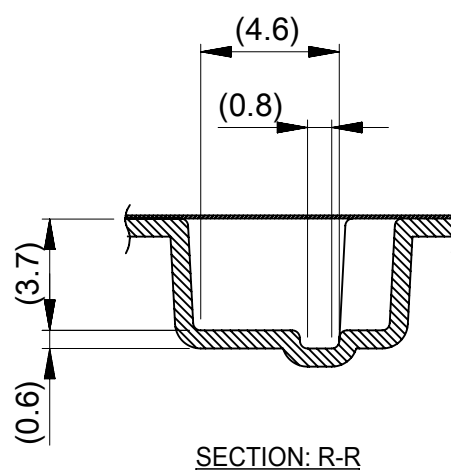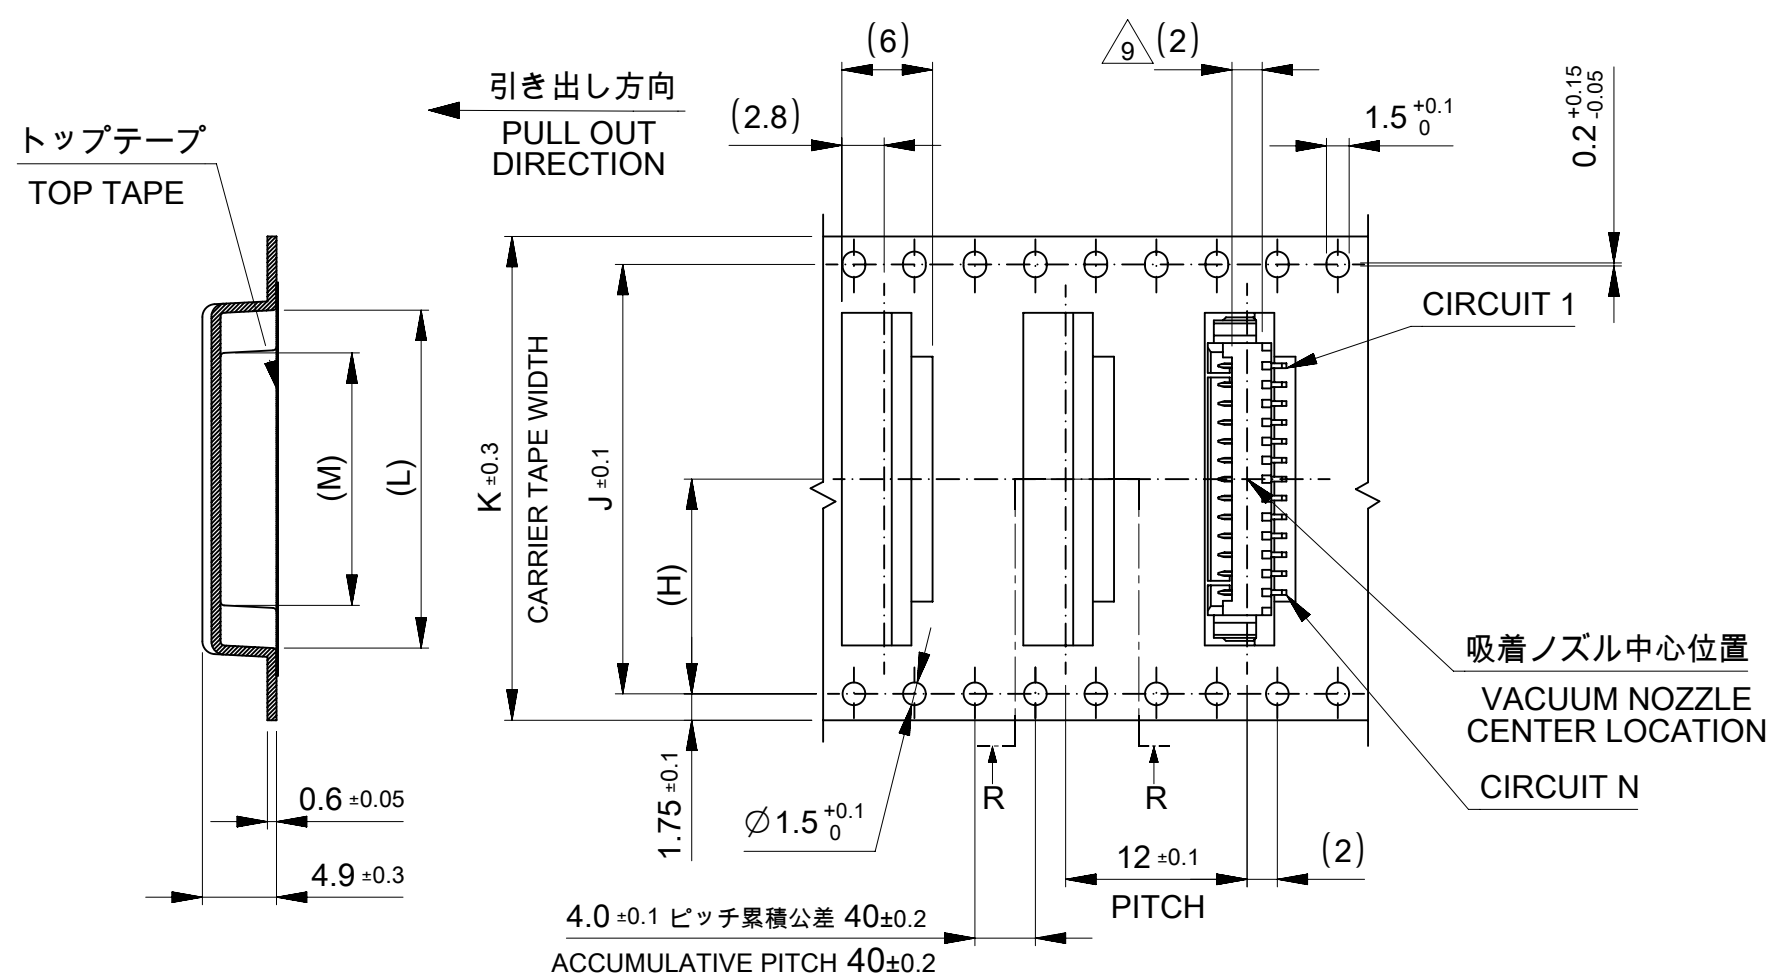

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)								PICOBLADE 1.25 HEADER ASSY SMT RIGHT ANGLE GOLD PLATING TYPE							
ANGULAR TOL ± 3.0 °															
4 PLACES		± 0.2		EC NO: 643451				PRODUCT CUSTOMER DRAWING							
3 PLACES		± 0.2		DRWN: SOBARA01 2019/04/08											
2 PLACES		± 0.2		CHK'D: SAKIYAMA 2021/05/27											
1 PLACE		± 0.2		APPR: KOMURAKAMI 2021/05/27				DOCUMENT NUMBER		DOC TYPE		DOC PART	REVISION		
0 PLACES		± 0.2		INITIAL REVISION:				532610000-SD		PSD		000	C		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A2-SIZE		53261		SEE CHART OF SHEET3		GENERAL		3 OF 4	

DOCUMENT STATUS	P1	RELEASE DATE	2021/05/27	10:21:18
-----------------	----	--------------	------------	----------

