

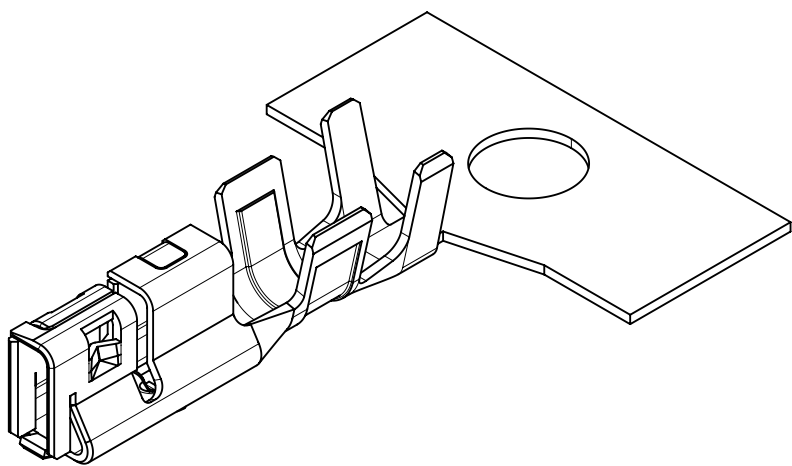
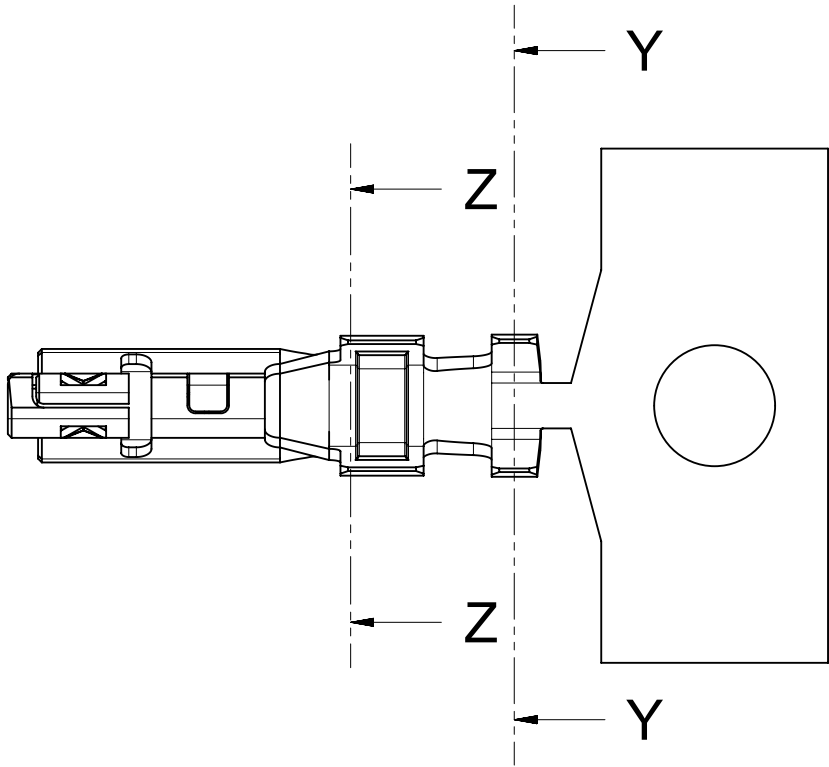



GENERAL TOLERANCE										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 OVER	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±0.5°	0.1	




ISO VIEW

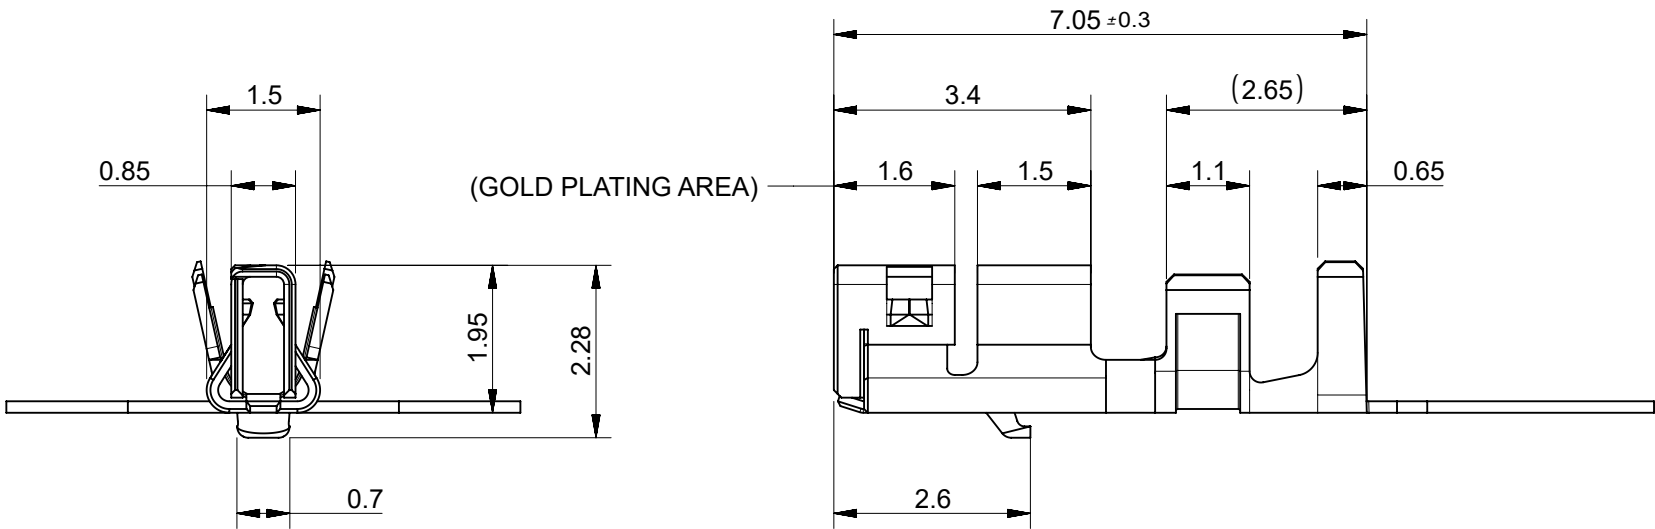

SECTION Z-Z



SECTION Y-Y

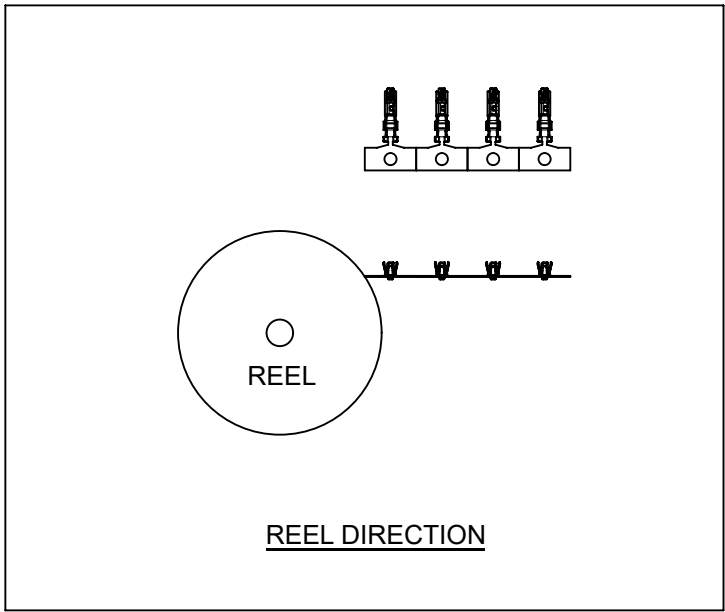

- NOTES:
1. MATERIALS : CORSON ALLOY, 0.15T
 2. APPLICABLE HOUSING : 560123 SERIES
 3. APPLICABLE WIRE : SEE CS-560124-001
 4. GENERAL TOLERANCE : SEE TABLE
 5. ELV AND RoHS COMPLIANT
 6. PRODUCT SPECIFICATION : PS-5601240131
 7. PACKING SPECIFICATION : PK-560124-001
 8. CRIMP SPECIFICATION : CS-560124-001
 9. PLATING : Au SELECTIVE
(Ni : 1.5um Min. UNDER PLATING, Au : 0.2um Min.)

ORDER NO.	MATERIAL NO.
560124-0131	5601240131

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex NEW 2.0 W/B CRIMP REC DURACLIK ISL SERIES (GOLD PLATING)		
	mm		10:1							
	GENERAL TOLERANCES (UNLESS SPECIFIED)									
	ANGULAR TOL ± °									
	4 PLACES		±		EC NO: 631225 DRWN: SAKIM					

DOCUMENT STATUS	P1	RELEASE DATE	2020/01/28	09:13:00
-----------------	----	--------------	------------	----------

FORMAT: mox-16-005-A3	REVISION: 11	DATE: 2018/01/18
-----------------------	--------------	------------------