

# Features

## Regulated Converters

- Compact 10.35 x 7.5mm SMD package
- Low profile (2.5mm)
- 3kVDC/1min isolation
- Low EMI emissions
- Ultra-wide temperature range -40°C to +125°C
- Fully automated, high-reliability design
- Semi-regulated 5V output

**RECOM**  
DC/DC Converter

## RxxC05TExxS

**0.5 Watt**  
**16-Pin SOIC**  
**Single Output**



IEC/EN62368-1 pending

## Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Power [W]	Efficiency typ. <sup>(1)</sup> [%]
R05C05TE05S	4.5-5.5	5	0.5	53

### Notes:

Note1: nom.  $V_{IN}$  = 5VDC,  $V_{OUT}$  = 5VDC, full load

## Model Numbering



### Notes:

Note2: add suffix “-R” for standard tape and reel packaging  
add suffix “-CT” for bag packaging for more details refer to “**PACKAGING INFORMATION**”

## Specifications (measured @ $T_a$ = 25°C, nom. $V_{IN}$ , full load and after warm-up unless otherwise stated)

### ABSOLUTE MAXIMUM RATINGS <sup>(3)</sup>

Parameter	Condition	Min.	Typ.	Max.
Absolute Maximum Voltage	$+V_{IN}$ to $-V_{IN}$	-0.3VDC		6VDC
	$+V_{IN}$ to $-V_{IN}$ or $SGND_{IN}$	-0.3VDC		6VDC
	$+V_{OUT}$ to $-V_{OUT}$ or $SGND_{OUT}$	-0.3VDC		6VDC
Operating IC Junction Temperature ( $T_J$ )				+150°C
Lead Temperature				+260°C
Storage Temperature ( $T_{STO}$ )		-65°C		+150°C


### Notes:

Note3: Stresses beyond those listed under absolute maximum ratings can cause permanent damage to the device. (Values are at non-operating)

**Specifications** (measured @  $T_a = 25^\circ\text{C}$ , nom.  $V_{in}$ , full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range		4.5VDC	5VDC	5.5VDC
Under Voltage Lockout (UVLO)	DC-DC ON DC-DC OFF		3.28VDC 2.88VDC	
Under Voltage Lockout Hysteresis			190mV	
Input Current Range	$P_{out} = 0.5\text{W}$ $P_{out} = 0.6\text{W}$		240mA 255mA	
Quiescent Current			7mA	
Minimum Load		0%		
Internal Operating Frequency			30MHz	
Output Ripple Voltage			50mVp-p	100mVp-p

**Typical Application Circuit**

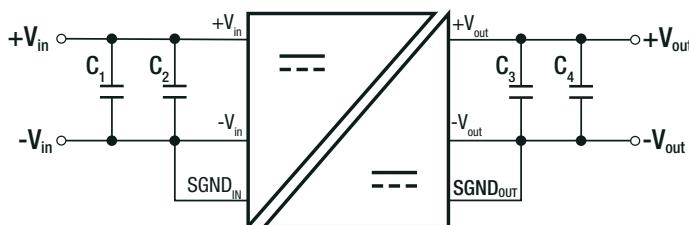


**Input and Output Capacitors\***

$C_1$	$C_2$	$C_3$	$C_4$
10 $\mu\text{F}$	0.1 $\mu\text{F}$	10 $\mu\text{F}$	0.1 $\mu\text{F}$

\*these capacitors are mandatory for stable operation

**Efficiency vs. Load**

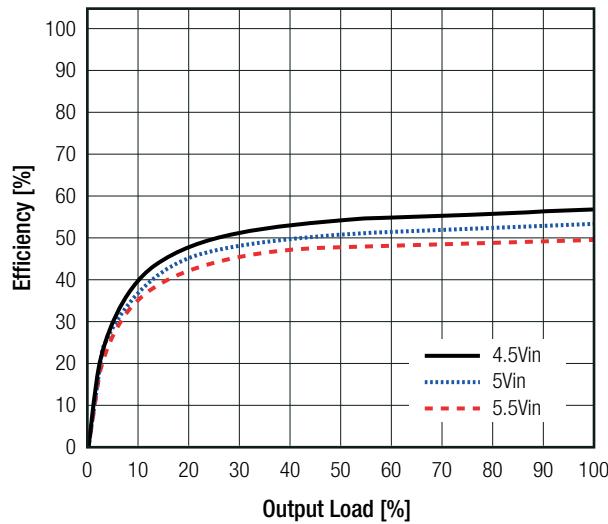

**REGULATION**

Parameter	Condition	Min.	Typ.	Max.
Output Voltage Accuracy	$V_{in} = 4.5\text{-}5.5\text{VDC}$ , load= 0A		$\pm 1.5\%$	
Line Regulation	$V_{in} = 4.5\text{-}5.5\text{VDC}$ , load= 0.12A		$\pm 0.5\%$	
Load Regulation	0% - 100% load		1.0%	

## Specifications (measured @ $T_a = 25^\circ\text{C}$ , nom. $V_{in}$ , full load and after warm-up unless otherwise stated)

### PROTECTIONS

Parameter	Condition	Values
Short Circuit Protection (SCP)		continuous , hiccup mode
Over Current Protection		220mA, hiccup mode
Over Temperature Protection		automatic restart after cool down
Thermal Shutdown	IC junction temperature hysteresis	+160°C +20°C
Isolation Voltage	tested for 1second rated for 1 minute	3.6kVDC 3kVDC
Isolation Resistance	$V_{ISO} = 500\text{VDC}, 25^\circ\text{C}$	50G $\Omega$ typ.
Isolation Capacitance		7pF typ.
External Clearance		>8mm
External Creepage		>8mm

### ENVIRONMENTAL


Parameter	Condition	Value
Operating Temperature Range	@ natural convection 0.1m/s	-40°C to +125°C
ESD	human-body model (HBM), ANSI/ESDA/JEDEC JS-001	$\pm 6.0\text{kV}$
	charged-device model (CDM), JEDEC JESD22-C101	$\pm 2.0\text{kV}$
Moisture Sensitive Level	MSL peak temp. <sup>(5)</sup>	Level 3, 260°C, 168hrs
Thermal Impedance <sup>(6)</sup>	junction to $T_{AMB}$	63.8K/W
	junction to case (top)	21.4K/W
	junction to case (bottom)	37.2K/W
	junction to board	38.5K/W

#### Notes:

Note5: The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature


Note6: Tested with 54.0 x 85.6mm 2 layer PCB with 105 $\mu\text{m}$  copper

### Peak Load Capability

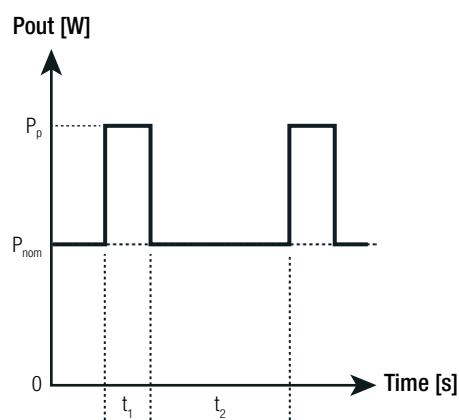

$P_{nom}$  = nom. output power (0.5W) [W]  
 $P_p$  = peak output power ( $\leq 0.6\text{W}$ ) [W]  
 $t_1$  = peak time set (60s max.) [s]  
 $t_2$  = recovery time (min. 3 x  $t_1$ ) [s]

### Thermal Derating <sup>(6)</sup>

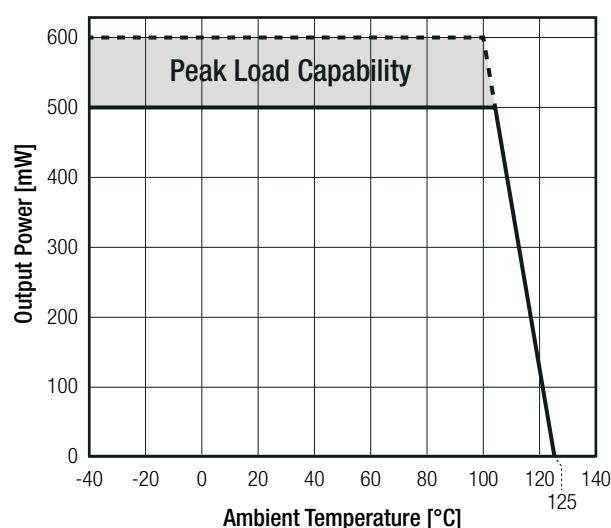

Specifications (measured @  $T_a = 25^\circ\text{C}$ , nom.  $V_{in}$ , full load and after warm-up unless otherwise stated)




**SAFETY AND CERTIFICATIONS**

Certificate Type (Safety)	Report Number	Standard
Information Technology Equipment, General Requirements for Safety (CB Scheme)	pending	IEC62368-1:2018, 3rd Edition
Information Technology Equipment, General Requirements for Safety		EN62368-1:2020 + A11:2020
RoHS2		RoHS 2011/65/EU + AM2015/863

**DIMENSION AND PHYSICAL CHARACTERISTICS**

Parameter	Type	Value
Dimension (LxWxH)		10.35 x 7.5 x 2.50mm
Weight		0.1g typ.



Dimension Drawing (mm)

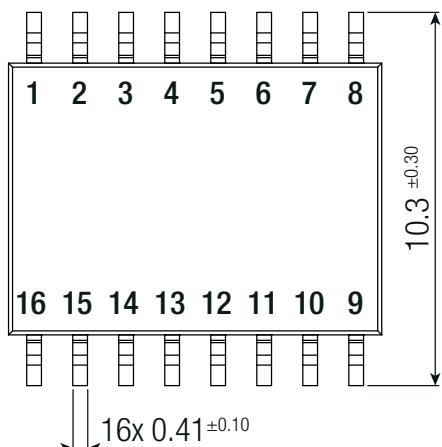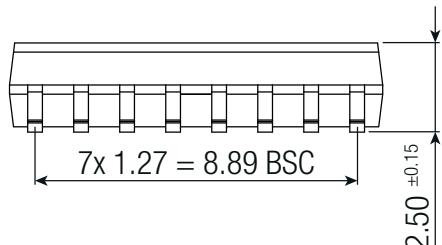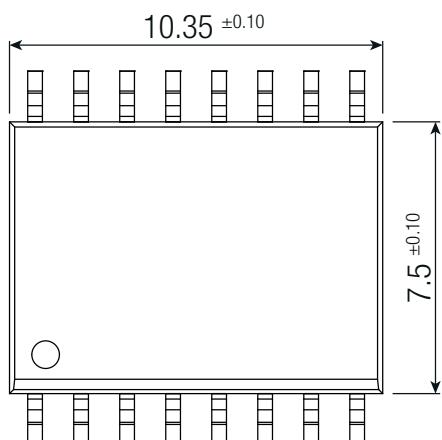

**Pin Information**


Pad #	Function
1,2	$-V_{IN}$
3,4	$+V_{IN}$
5,6,7,8	$SGND_{IN}$
9,11,12	$SGND_{OUT}$
10	DNC (do not connect)
13,14	$+V_{OUT}$
15,16	$-V_{OUT}$

Tolerances: x.x =  $\pm 0.1\text{mm}$   
x.xx =  $\pm 0.05\text{mm}$

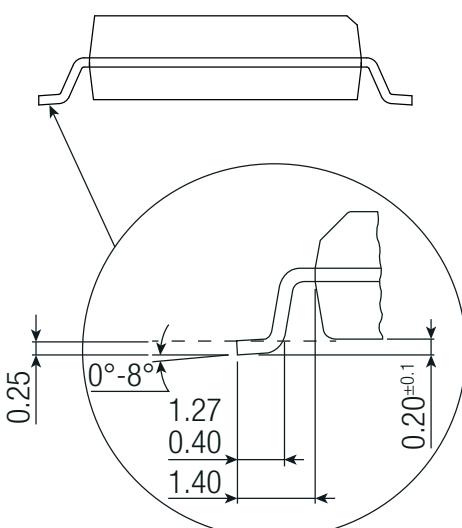

Specifications (measured @  $T_a = 25^\circ\text{C}$ , nom.  $V_{in}$ , full load and after warm-up unless otherwise stated)

Footprint Details

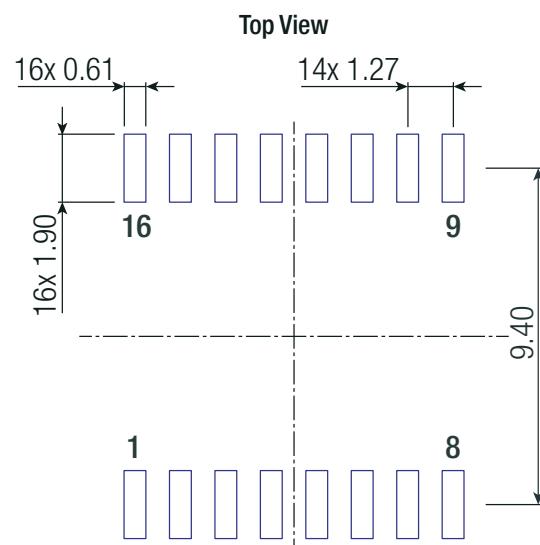

**PACKAGING INFORMATION**

Parameter	Type	Value
Packaging Dimension (LxWxH)	reel (diameter + width)	$\varnothing 177.8 + 24.4\text{mm}$ height
	tape and reel (carton)	260.0 x 240.0 x 60.0mm
	moisture barrier bag ("CT")	100.0 x 100.0 x 30mm
Tape Width		24mm
Packaging Quantity	tape and reel	500pcs
	moisture barrier bag ("CT")	10pcs
Storage Temperature Range		-65°C to +150°C

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.