


**CUI INC**

a bel group

**date** 07/06/2021

**page** 1 of 5

## SERIES: PHP1-M | DESCRIPTION: DC-DC CONVERTER

### FEATURES

- up to 1 W isolated output
- surface mount package
- 1:1 input range
- single unregulated output
- 2,000 Vdc isolation voltage
- -40 to 100°C temperature range
- efficiency up to 76%
- UL/cUL safety approval




### MODEL

|               | input voltage |                | output voltage | output current<br>max | output power<br>max | ripple & noise <sup>1</sup><br>max | efficiency<br>typ |
|---------------|---------------|----------------|----------------|-----------------------|---------------------|------------------------------------|-------------------|
|               | typ<br>(Vdc)  | range<br>(Vdc) |                |                       |                     |                                    |                   |
| PHP1-S3-S5-M  | 3.3           | 2.97~3.63      | 5              | 200                   | 1                   | 100                                | 75                |
| PHP1-S5-S5-M  | 5             | 4.5~5.5        | 5              | 200                   | 1                   | 100                                | 75                |
| PHP1-S5-S12-M | 5             | 4.5~5.5        | 12             | 84                    | 1                   | 100                                | 76                |
| PHP1-S5-S15-M | 5             | 4.5~5.5        | 15             | 66                    | 1                   | 100                                | 76                |
| PHP1-S12-S5-M | 12            | 10.8~13.2      | 5              | 200                   | 1                   | 100                                | 73                |
| PHP1-S15-S5-M | 15            | 13.5~16.5      | 5              | 200                   | 1                   | 100                                | 74                |

Notes: 1. At full load, nominal input, 20 MHz bandwidth oscilloscope, output terminated with a 0.1  $\mu$ F multilayer low ESR ceramic capacitor.  
2. All specifications measured at Ta=25°C, nominal input voltage, rated output load, and after warm up unless otherwise specified.

### PART NUMBER KEY

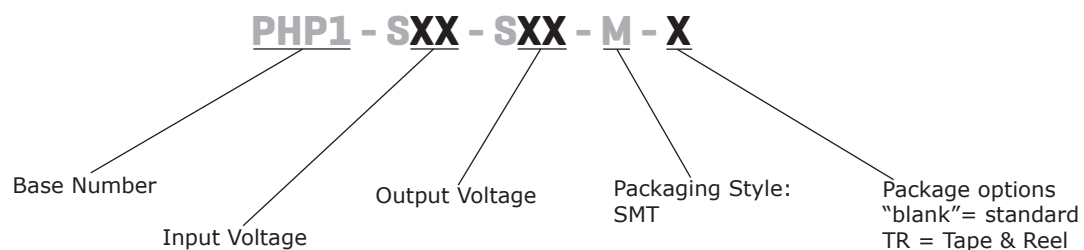

## INPUT

| parameter               | conditions/description | min  | typ | max  | units |
|-------------------------|------------------------|------|-----|------|-------|
| operating input voltage | 3.3 Vdc input model    | 2.97 | 3.3 | 3.63 | Vdc   |
|                         | 5 Vdc input models     | 4.5  | 5   | 5.5  | Vdc   |
|                         | 12 Vdc input model     | 10.8 | 12  | 13.2 | Vdc   |
|                         | 15 Vdc input model     | 13.5 | 15  | 16.5 | Vdc   |

## OUTPUT

| parameter                            | conditions/description                                   | min | typ | max  | units |
|--------------------------------------|----------------------------------------------------------|-----|-----|------|-------|
| maximum capacitive load <sup>1</sup> | 5 Vdc output models                                      |     |     | 1000 | μF    |
|                                      | 12 Vdc output model                                      |     |     | 330  | μF    |
|                                      | 15 Vdc output model                                      |     |     | 220  | μF    |
| voltage accuracy                     | at Vin nominal, full load, see tolerance envelope curves |     |     | ±5   | %     |
| line regulation                      | measured from low to high line, full load                |     | ±1  | ±1.5 | %     |
| load regulation                      | measured from 20~100% load                               |     | ±6  | ±10  | %     |
| switching frequency                  | at Vin nominal                                           | 20  | 60  | 100  | kHz   |

Note: 1. Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage.

## SAFETY AND COMPLIANCE

| parameter             | conditions/description                | min       | typ   | max | units |
|-----------------------|---------------------------------------|-----------|-------|-----|-------|
| isolation voltage     | input to output for 1 second          |           | 2,000 |     | Vdc   |
| isolation resistance  | at 500 Vdc                            | 10,000    |       |     | MΩ    |
| isolation capacitance |                                       |           |       | 75  | pF    |
| safety approvals      | UL/cUL (60950-1, 2nd Edition)         |           |       |     |       |
| MTBF                  | as per MIL-HDBK-217F, full load, 25°C | 2,992,000 |       |     | hours |
|                       | as per MIL-HDBK-217F, full load, 85°C | 955,000   |       |     | hours |
| RoHS                  | 2011/65/EU                            |           |       |     |       |


## ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature |                        | -40 |     | 100 | °C    |
| storage temperature   |                        | -55 |     | 125 | °C    |
| operating humidity    | non-condensing         |     |     | 95  | %     |

## SOLDERABILITY

| parameter                     | conditions/description    | min | typ | max | units |
|-------------------------------|---------------------------|-----|-----|-----|-------|
| reflow soldering <sup>2</sup> | see reflow solder profile |     |     | 245 | °C    |

Note: 2. In accordance with JEDEC STD-020C.

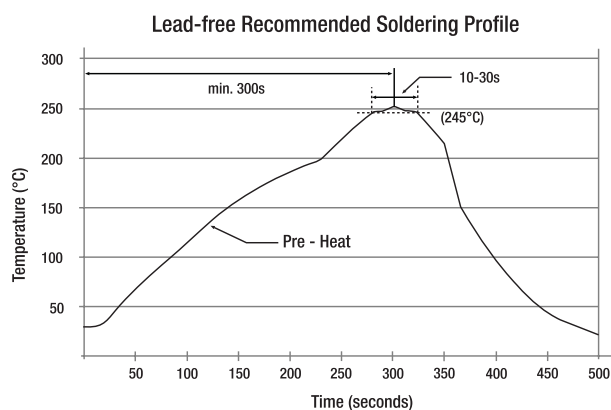

## MECHANICAL

| parameter     | conditions/description                 | min | typ | max | units |
|---------------|----------------------------------------|-----|-----|-----|-------|
| dimensions    | 12.75 x 10.7 x 7.0                     |     |     |     | mm    |
| case material | non-conductive black plastic (UL94V-0) |     |     |     |       |
| weight        |                                        |     | 1.0 |     | g     |






## MECHANICAL DRAWING

units: mm



tolerance: XX.X =  $\pm 0.5$  mmXX.XX =  $\pm 0.25$  mm

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | Function |
| 1               | -Vin     |
| 2               | +Vin     |
| 4               | -Vout    |
| 5               | +Vout    |
| 8               | NC       |

NC = no connection

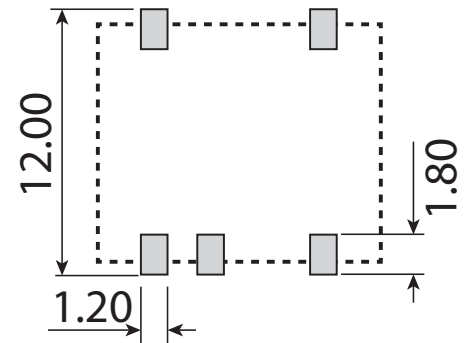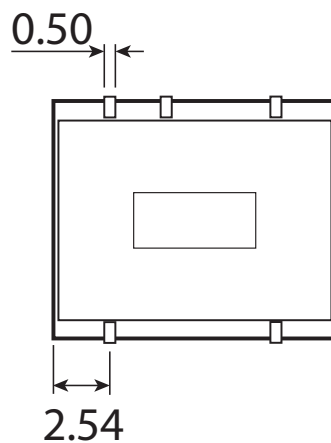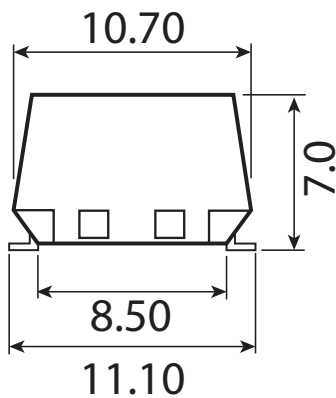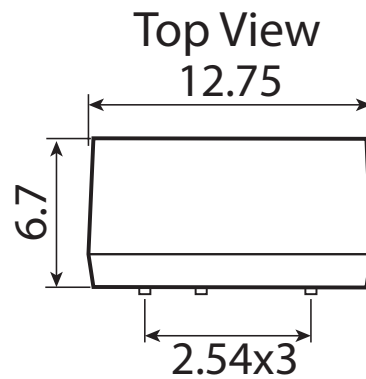

## PERFORMANCE CURVES

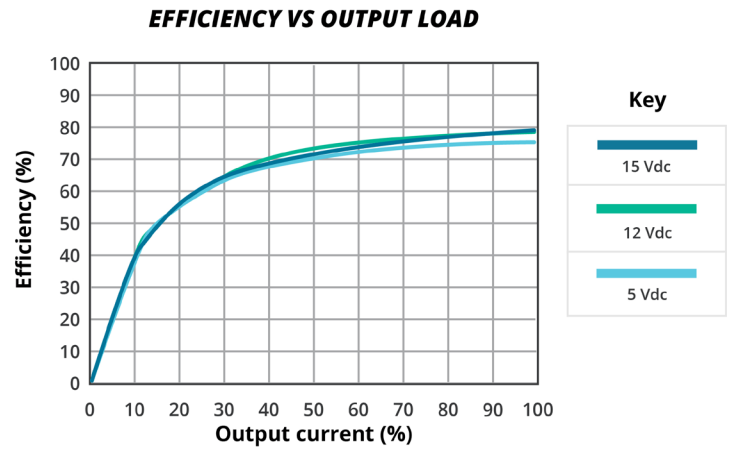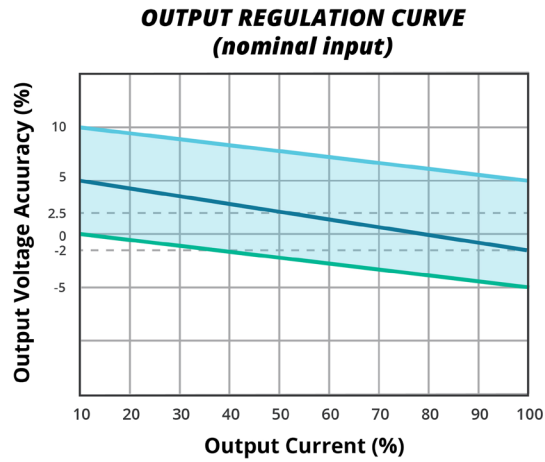


## PACKAGING

units: mm

Tape &amp; Reel: Conforms to EIA-481-2

Reel Size: Ø13"

QTY: 500 pcs per reel

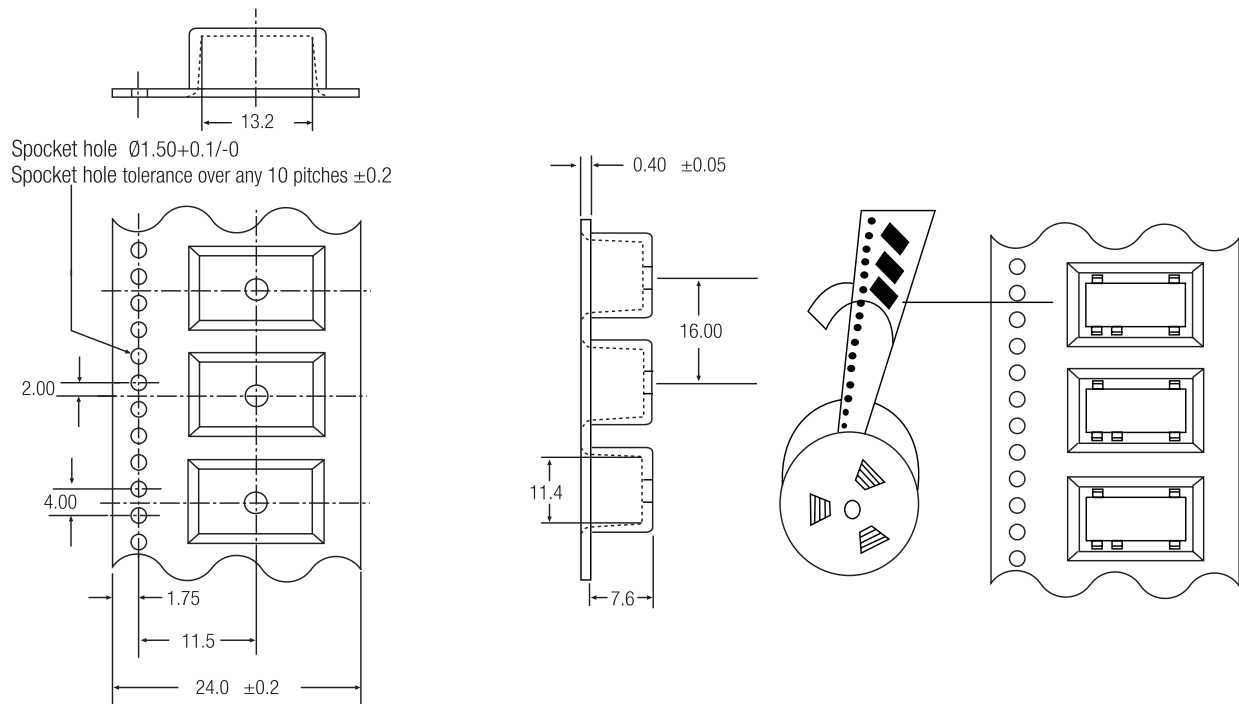

## REVISION HISTORY

| rev. | description                | date       |
|------|----------------------------|------------|
| 1.0  | initial release            | 07/25/2016 |
| 1.01 | company logo updated       | 03/30/2021 |
| 1.02 | performance curves updated | 07/06/2021 |

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**  
a bel group

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.