

CMPA1C1D080F

90 W, 12.75 - 13.25 GHz, GaN MMIC, Power Amplifier

Description

Cree's CMPA1C1D080F is a packaged, 90 W HPA utilizing Cree's high performance, 0.25um GaN on SiC production process. With a 12.75 - 13.25 GHz operating frequency range targeting satellite communications, the CMPA1C1D080F offers 3rd-order intermodulation performance of -30 dBc at 20 W of total output power. For exceptional thermal management, the HPA is offered in a bolt-down, flange package.



PN: CMPA1C1D080F
Package Type: 440222

Typical Performance Over 12.75 - 13.25 GHz ($T_c = 25^\circ\text{C}$)

Parameter	12.75 GHz	13.0 GHz	13.25 GHz	Units
Small Signal Gain ^{1,2}	26.6	25.3	25.2	dB
Output Power ^{1,3}	49.7	49.9	49.7	dBm
Power Gain ^{1,3}	16.7	16.9	16.7	dB
Power Added Efficiency ^{1,3}	23	23	21	%
IM3 ^{1,4}	-27	-27	-27	dBc

Notes:

¹ $V_{DD} = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$

² Measured at Pin = -15 dBm

³ Measured at Pin = 33 dBm, CW

⁴ Measured at 40 dBm Pout/tone, 10 MHz

Features

- 90 W Typical P_{SAT}
- >21% Typical Power Added Efficiency
- 25 dB Small Signal Gain
- 20 W Total Output Power at -30 dBc IM3
- Operation up to 40 V

Note: Features are typical performance across frequency under 25°C operation. Please reference performance charts for additional details.

Applications

- Satellite Communications Uplink

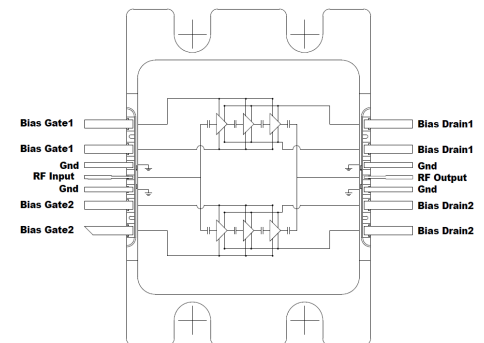


Figure 1.

RoHS
COMPLIANT

Absolute Maximum Ratings (not simultaneous) at 25 °C

Parameter	Symbol	Rating	Units	Conditions
Drain-source Voltage	V_{DS}	120	VDC	25°C
Gate-source Voltage	V_{GS}	-10, +2	VDC	25°C
Storage Temperature	T_{STG}	-55, +150	°C	
Maximum Forward Gate Current	I_G	27	mA	25°C
Maximum Drain Current	I_{DMAX}	13.5	A	
Soldering Temperature	T_S	260	°C	
Junction Temperature	T_J	225	°C	MTTF > 1e6 Hours

Electrical Characteristics (Frequency = 12.75 GHz to 13.25 GHz unless otherwise stated; $T_c = 25^\circ\text{C}$)

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
DC Characteristics						
Gate Threshold Voltage	$V_{GS(TH)}$	-3.1	-2.9	-2.7	V	$V_{DS} = 10\text{ V}, I_D = 27\text{ mA}$
Gate Quiescent Voltage	$V_{GS(Q)}$	-	-2.65	-	V _{DC}	$V_{DD} = 40\text{ V}, I_{DQ} = 750\text{ mA}$
Saturated Drain Current ¹	I_{DS}	25.8	26.2	-	A	$V_{DS} = 6.0\text{ V}, V_{GS} = 2.0\text{ V}$
Drain-Source Breakdown Voltage	V_{BD}	120	-	-	V	$V_{GS} = -8\text{ V}, I_D = 27\text{ mA}$
RF Characteristics²						
Small Signal Gain	S_{21_1}	-	25	-	dB	Pin = -15 dBm, Freq = 12.75 - 13.25 GHz
Output Power	P_{OUT1}	-	49.7	-	dBm	$V_{DD} = 40\text{ V}, I_{DQ} = 750\text{ mA}, P_{IN} = 33\text{ dBm}$, Freq = 12.75 GHz
Output Power	P_{OUT2}	-	49.9	-	dBm	$V_{DD} = 40\text{ V}, I_{DQ} = 750\text{ mA}, P_{IN} = 33\text{ dBm}$, Freq = 13.0 GHz
Output Power	P_{OUT3}	-	49.7	-	dBm	$V_{DD} = 40\text{ V}, I_{DQ} = 750\text{ mA}, P_{IN} = 33\text{ dBm}$, Freq = 13.25 GHz
Power Added Efficiency	PAE_1	-	23	-	%	$V_{DD} = 40\text{ V}, I_{DQ} = 750\text{ mA}, P_{IN} = 33\text{ dBm}$, Freq = 12.75 GHz
Power Added Efficiency	PAE_2	-	23	-	%	$V_{DD} = 40\text{ V}, I_{DQ} = 750\text{ mA}, P_{IN} = 33\text{ dBm}$, Freq = 13.0 GHz
Power Added Efficiency	PAE_3	-	21	-	%	$V_{DD} = 40\text{ V}, I_{DQ} = 750\text{ mA}, P_{IN} = 33\text{ dBm}$, Freq = 13.25 GHz
Power Gain	G_{P1}	-	16.7	-	dB	$V_{DD} = 40\text{ V}, I_{DQ} = 750\text{ mA}, P_{IN} = 33\text{ dBm}$, Freq = 12.75 GHz
Power Gain	G_{P2}	-	16.9	-	dB	$V_{DD} = 40\text{ V}, I_{DQ} = 750\text{ mA}, P_{IN} = 33\text{ dBm}$, Freq = 13.0 GHz
Power Gain	G_{P3}	-	16.7	-	dB	$V_{DD} = 40\text{ V}, I_{DQ} = 750\text{ mA}, P_{IN} = 33\text{ dBm}$, Freq = 13.25 GHz
Input Return Loss	S11	-	-18.6	-	dB	Pin = -15 dBm, 12.75 - 13.25 GHz
Output Return Loss	S22	-	-15.8	-	dB	Pin = -15 dBm, 12.75 - 13.25 GHz
IM3	IM3	-	-27	-	dBc	Pout/tone = 40 dBm, 10 MHz spacing
Output Mismatch Stress	VSWR	-	-	3 : 1	Ψ	No damage at all phase angles

Notes:

¹ Scaled from PCM data² Unless otherwise noted: Pin = 33 dBm, $V_{DD} = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW**Thermal Characteristics**

Parameter	Symbol	Rating	Units	Conditions
Operating Junction Temperature	T_J	217	°C	CW, $P_{DISS} = 236\text{ W}$, $T_{CASE} = 85^\circ\text{C}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.56	°C/W	

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{in} = 33\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 1. Output Power vs Frequency as a Function of Temperature

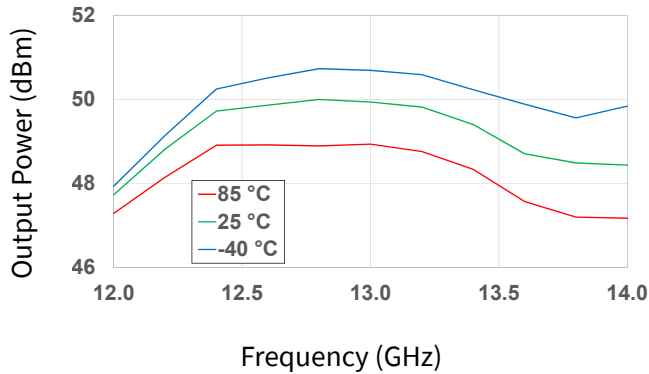


Figure 2. Output Power vs Frequency as a Function of Input Power

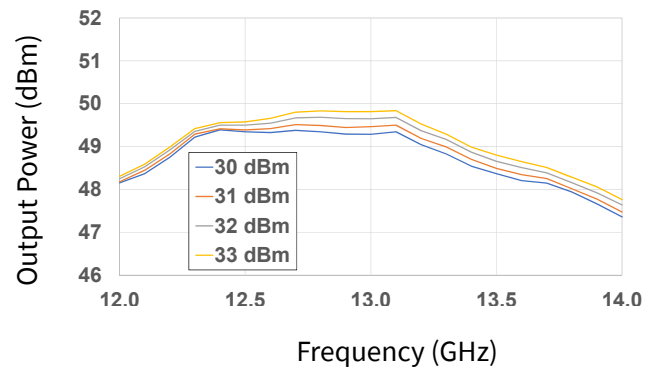


Figure 3. Power Added Eff. vs Frequency as a Function of Temperature

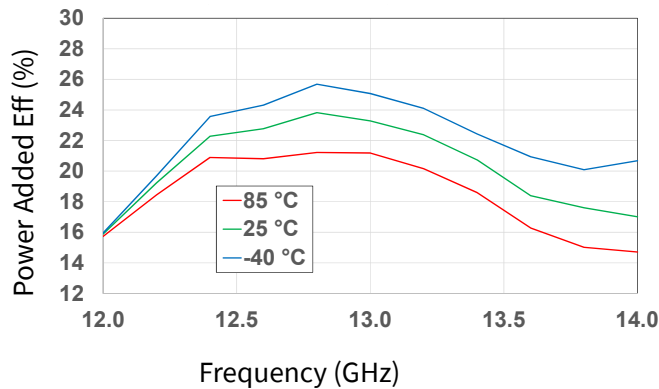


Figure 4. Power Added Eff. vs Frequency as a Function of Input Power

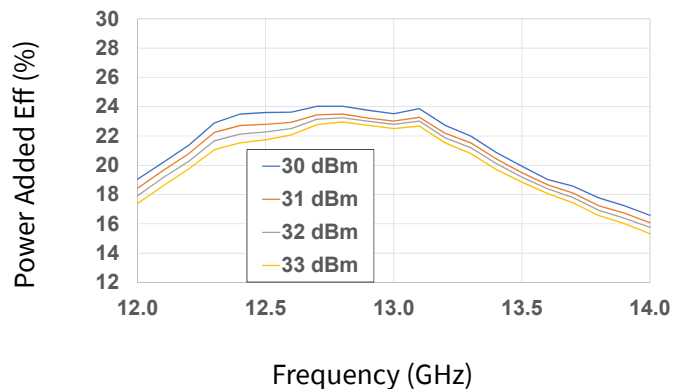


Figure 5. Drain Current vs Frequency as a Function of Temperature


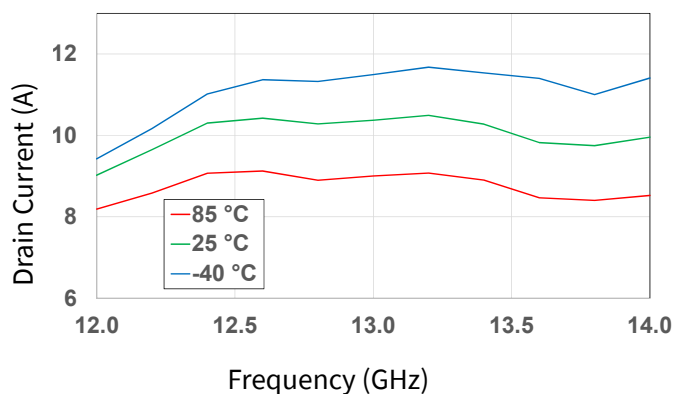


Figure 6. Drain Current vs Frequency as a Function of Input Power

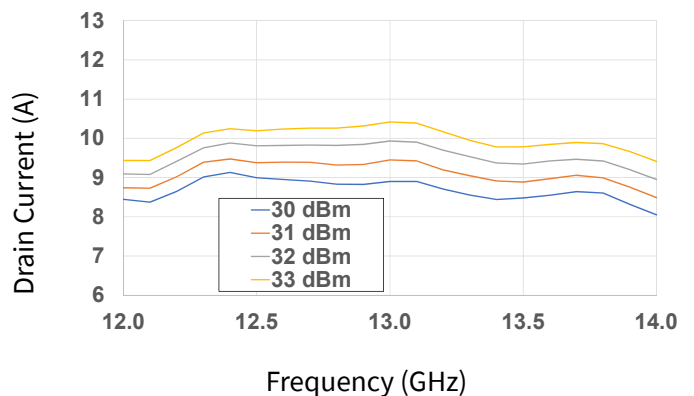

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, Pin = 33 dBm, $T_{BASE} = +25\text{ }^{\circ}\text{C}$

Figure 7. Output Power vs Frequency as a Function of V_D

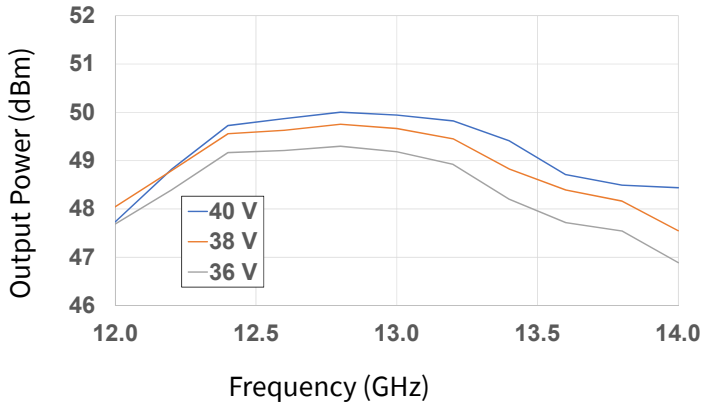


Figure 8. Output Power vs Frequency as a Function of I_{DQ}

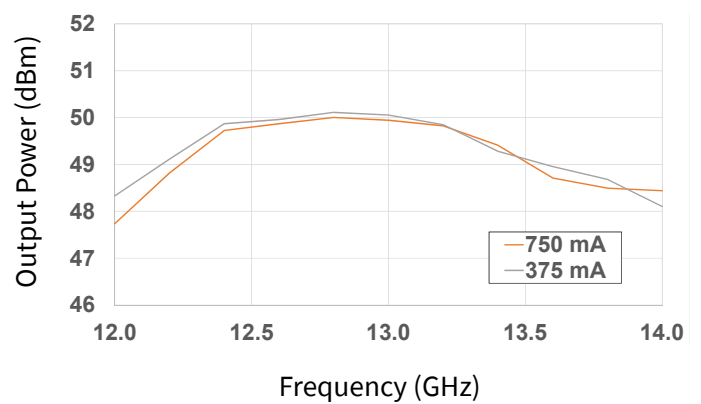


Figure 9. Power Added Eff. vs Frequency as a Function of V_D

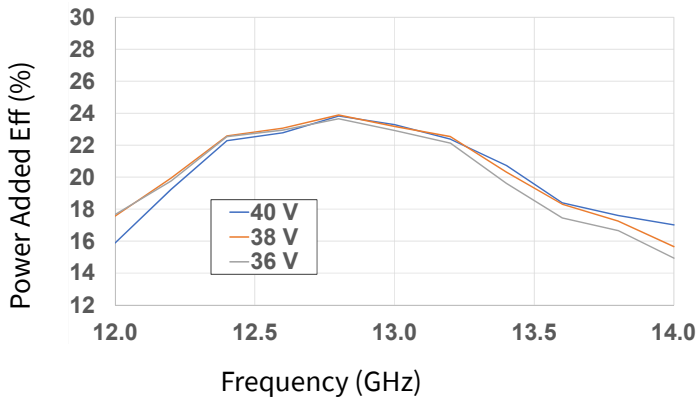


Figure 10. Power Added Eff. vs Frequency as a Function of I_{DQ}

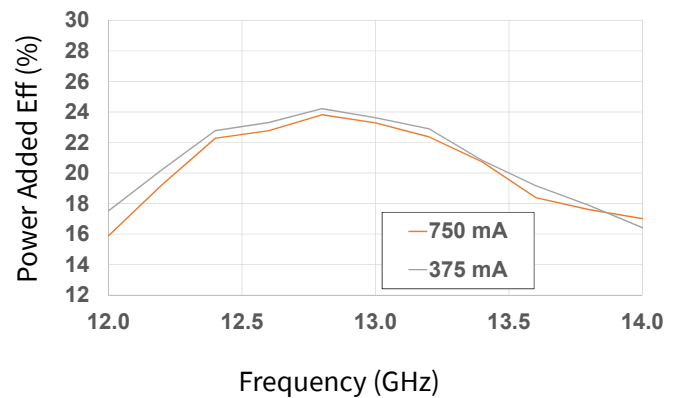


Figure 11. Drain Current vs Frequency as a Function of V_D


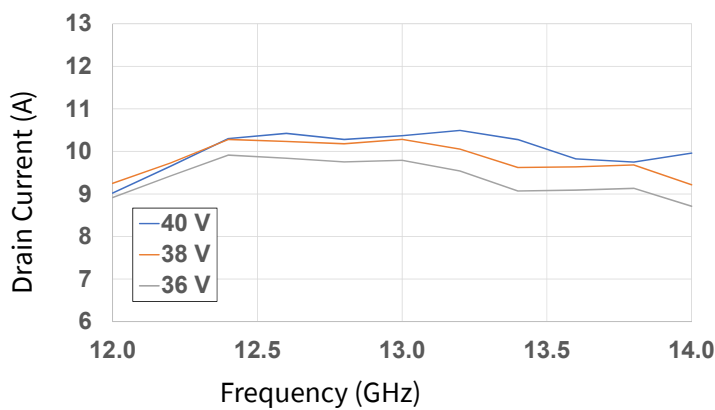


Figure 12. Drain Current vs Frequency as a Function of I_{DQ}

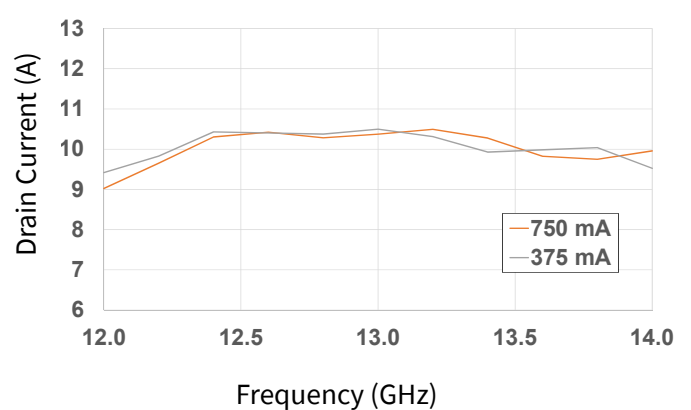

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $\text{Pin} = 33\text{ dBm}$, $T_{\text{BASE}} = +25\text{ }^\circ\text{C}$

Figure 13. Output Power vs Input Power as a Function of Frequency

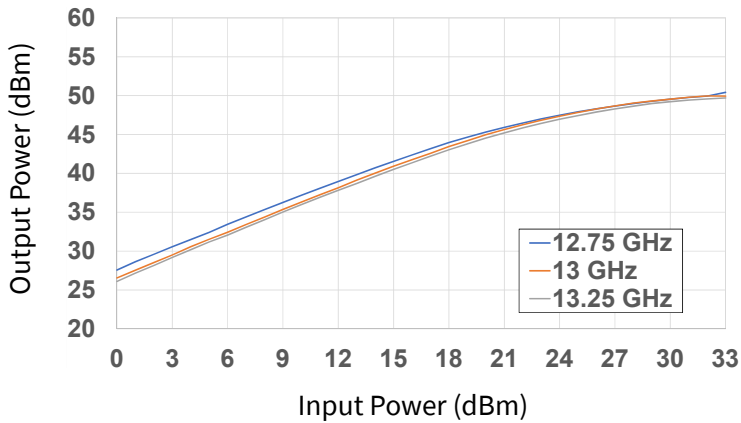


Figure 14. Power Added Eff. vs Input Power as a Function of Frequency

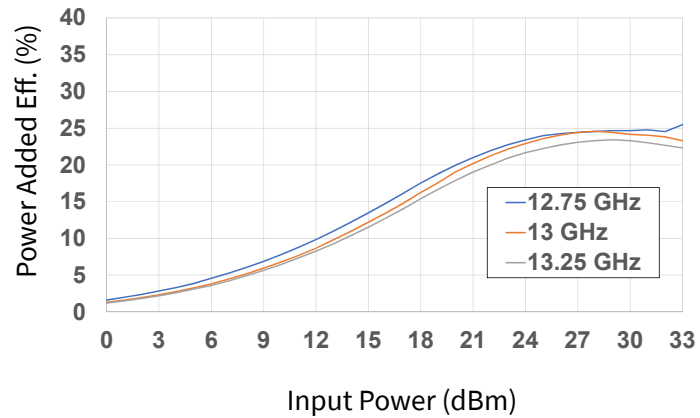


Figure 15. Large Signal Gain vs Input Power as a Function of Frequency

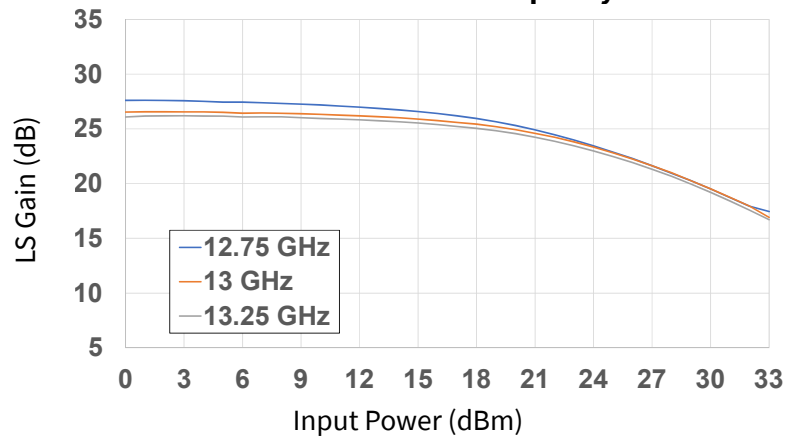


Figure 16. Drain Current vs Input Power as a Function of Frequency


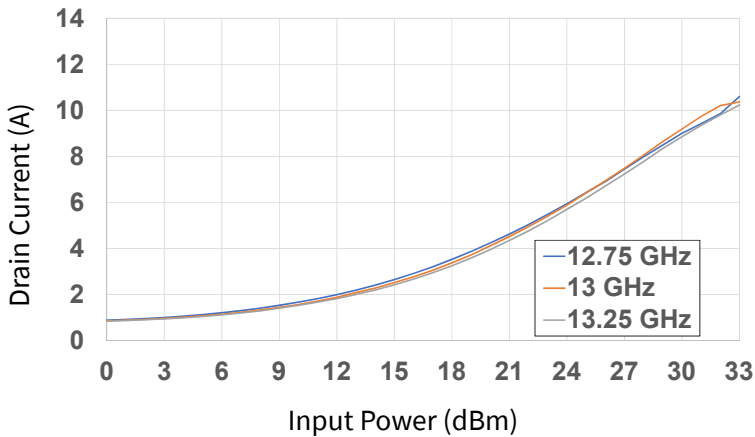


Figure 17. Gate Current vs Input Power as a Function of Frequency

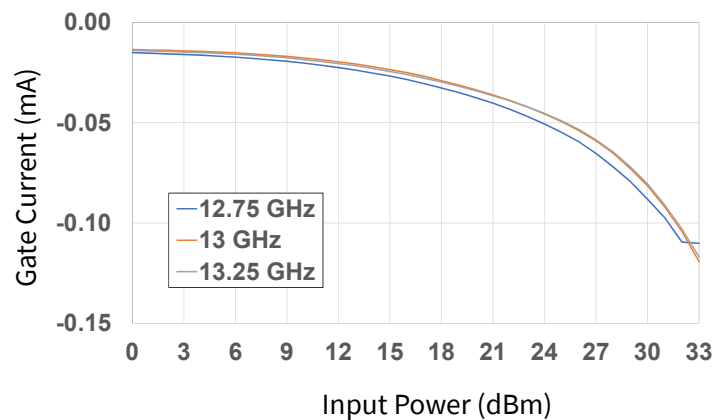

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, $P_{in} = 33\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 18. Output Power vs Input Power as a Function of Temperature

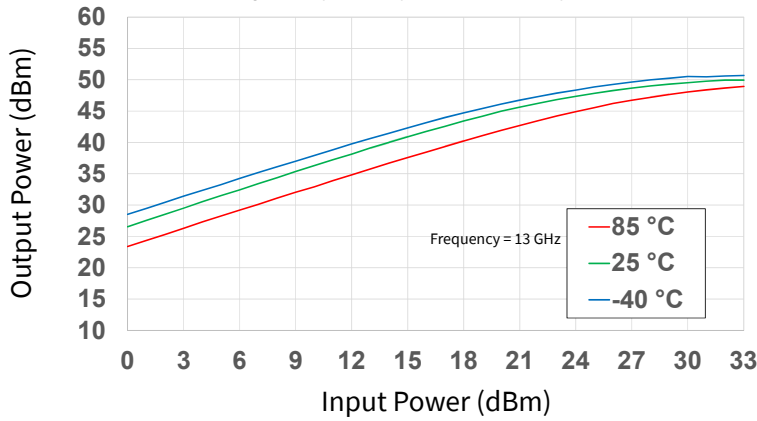


Figure 19. Power Added Eff. vs Input Power as a Function of Temperature

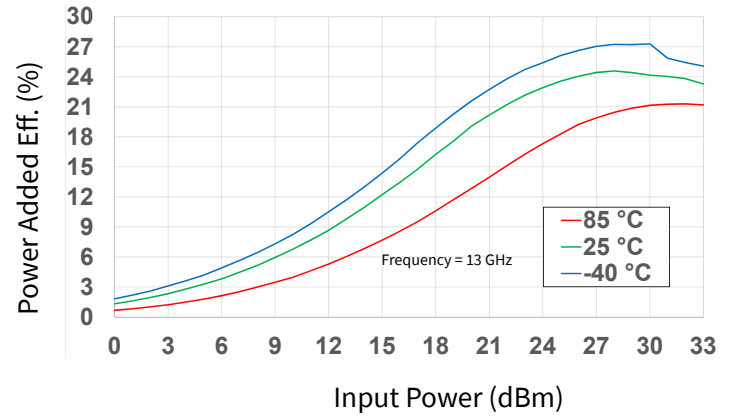


Figure 20. Large Signal Gain vs Input Power as a Function of Temperature

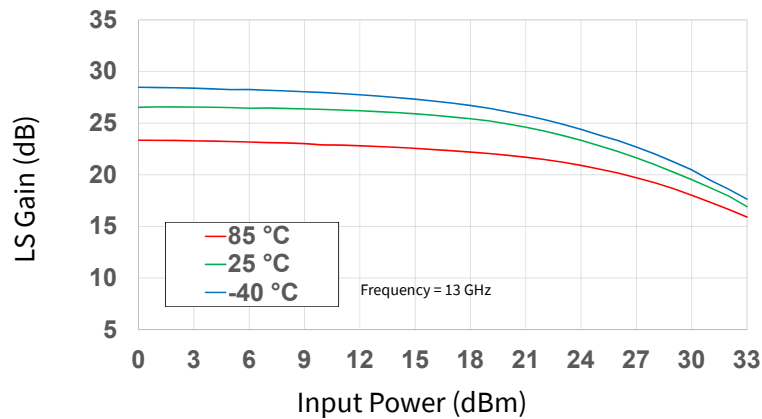


Figure 21. Drain Current vs Input Power as a Function of Temperature


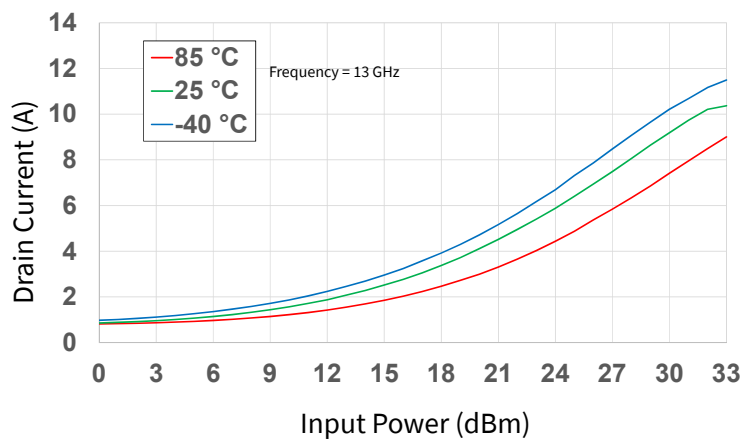


Figure 22. Gate Current vs Input Power as a Function of Temperature

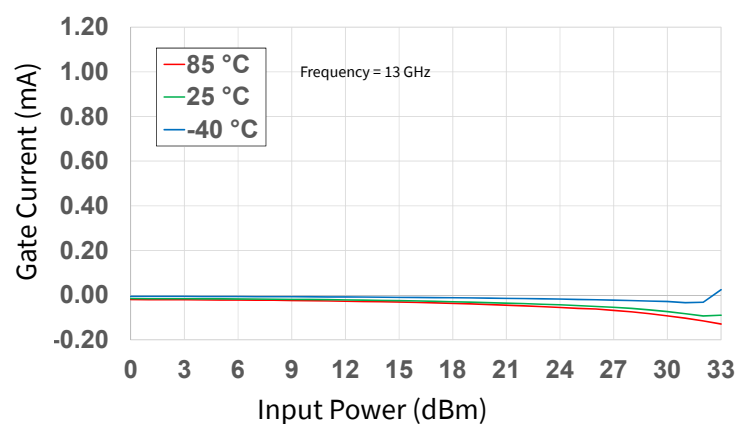

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40$ V, $I_{DQ} = 750$ mA, CW, $P_{in} = 33$ dBm, $T_{BASE} = +25$ °C

Figure 23. Output Power vs Input Power as a Function of IDQ

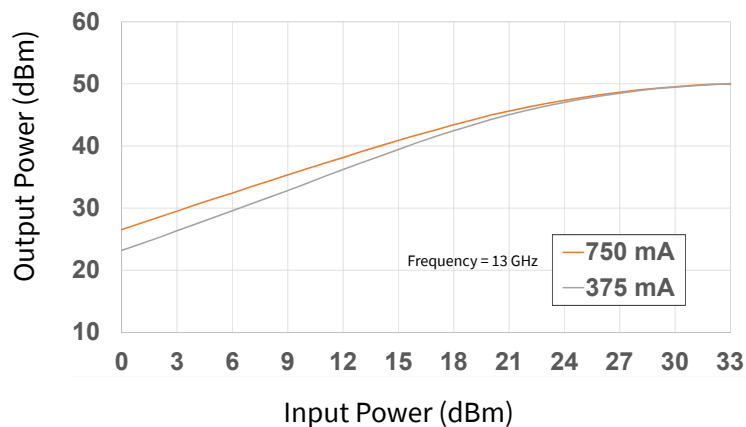


Figure 24. Power Added Eff. vs Input Power as a Function of IDQ

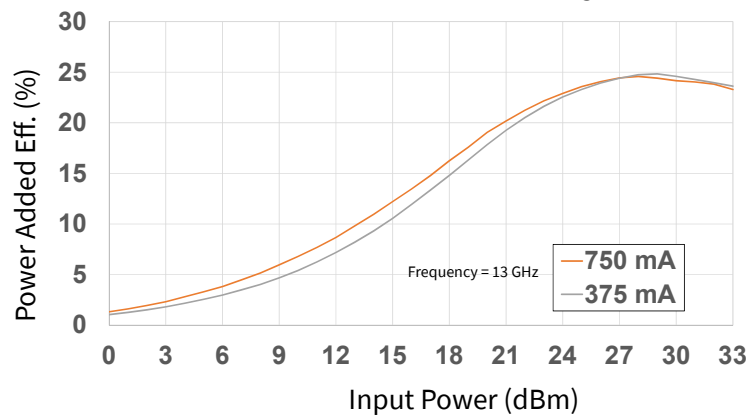


Figure 25. Large Signal Gain vs Input Power as a Function of IDQ

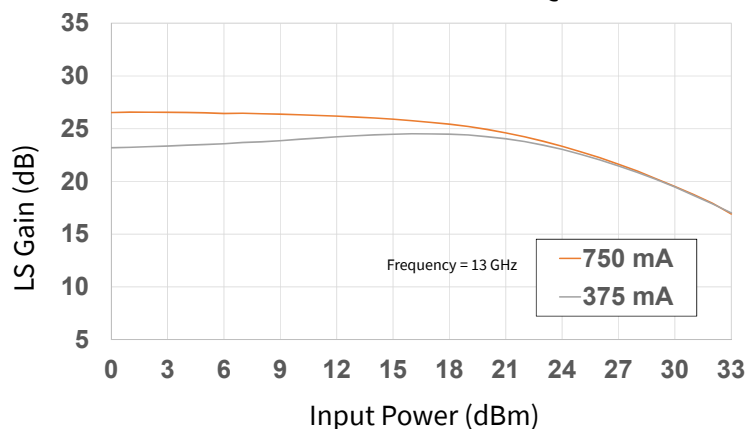


Figure 26. Drain Current vs Input Power as a Function of IDQ


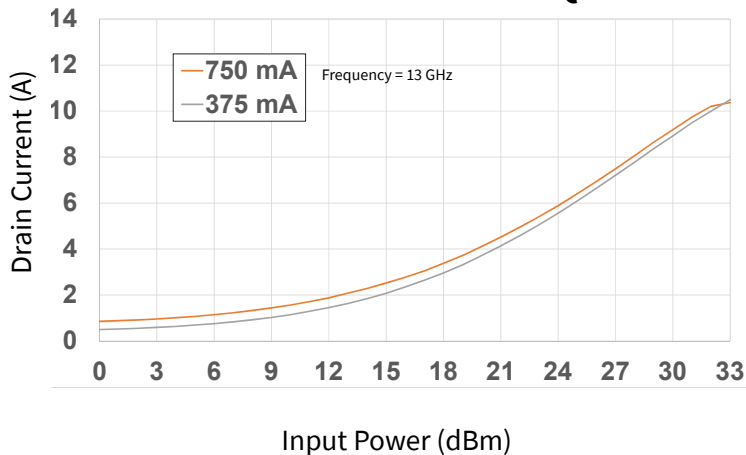


Figure 27. Gate Current vs Input Power as a Function of IDQ

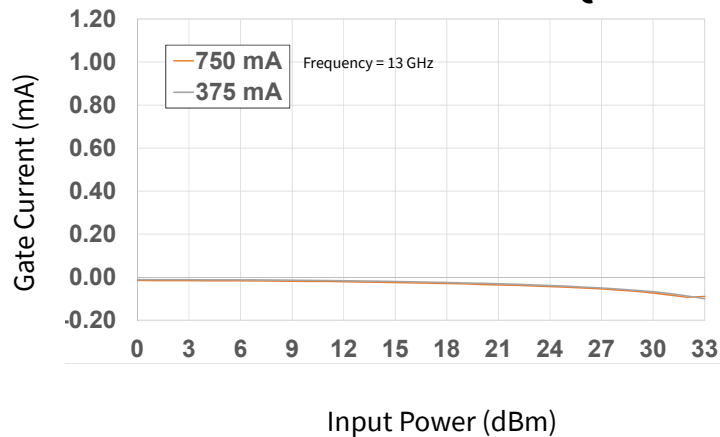

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, $P_{in} = -15\text{ dBm}$, $T_{BASE} = +25\text{ }^{\circ}\text{C}$

Figure 28. Gain vs Frequency as a Function of Temperature

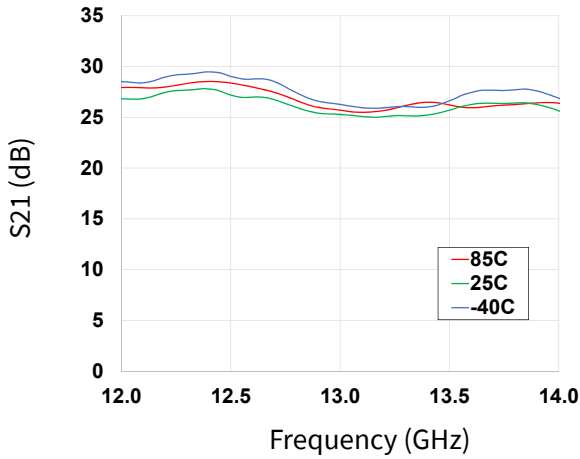


Figure 29. Gain vs Frequency as a Function of Temperature

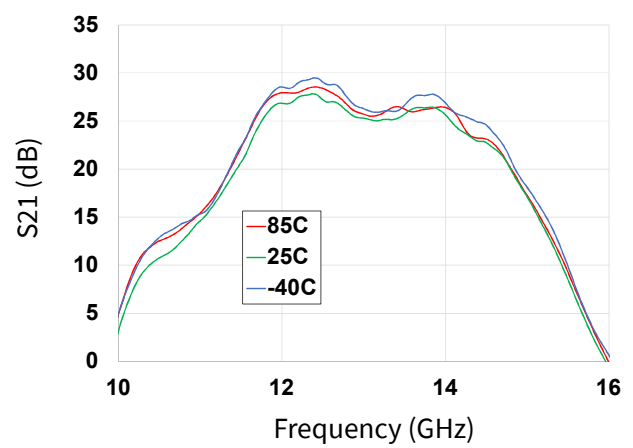


Figure 30. Input RL vs Frequency as a Function of Temperature

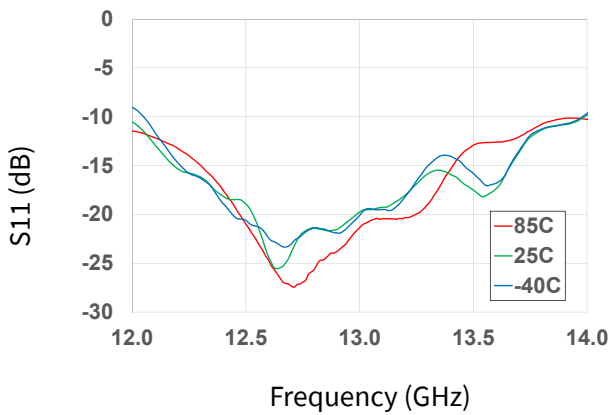


Figure 31. Input RL vs Frequency as a Function of Temperature

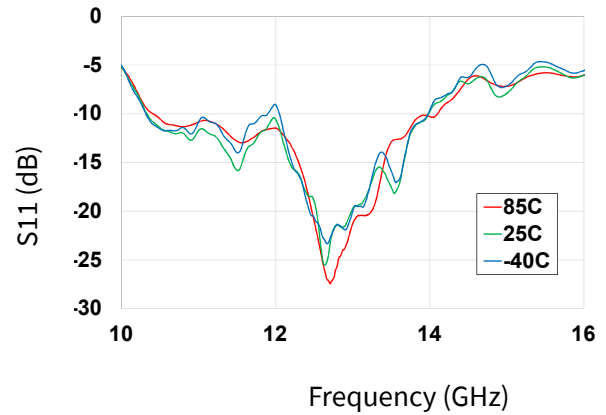


Figure 32. Output RL vs Frequency as a Function of Temperature


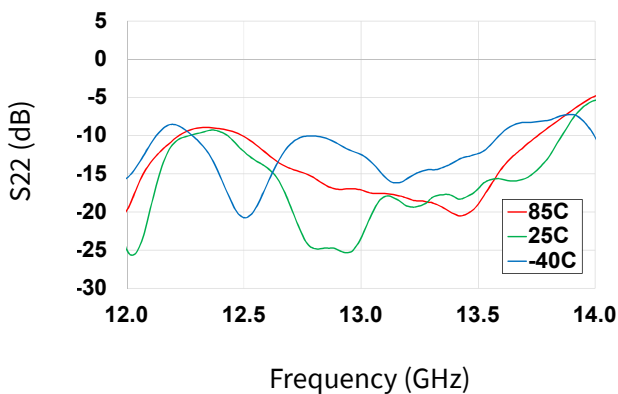


Figure 33. Output RL vs Frequency as a Function of Temperature

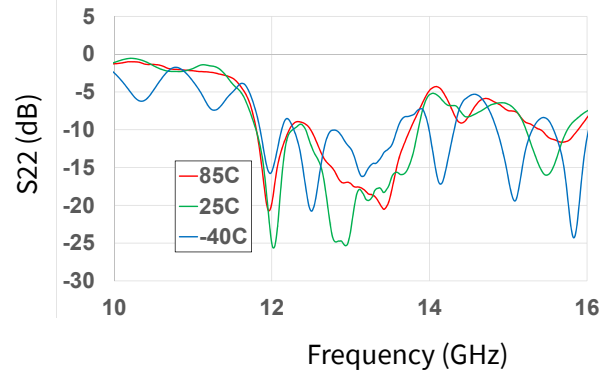

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, $\text{Pin} = -15\text{ dBm}$, $T_{\text{BASE}} = +25^\circ\text{C}$

Figure 34. Gain vs Frequency as a Function of Voltage

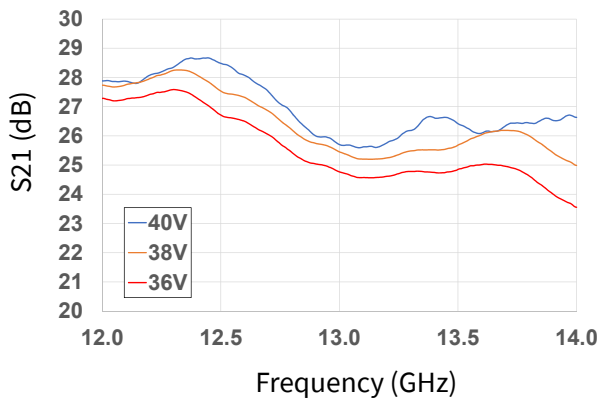


Figure 35. Gain vs Frequency as a Function of IDQ

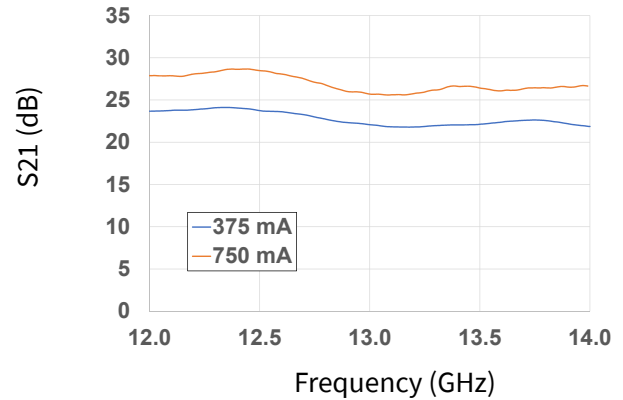


Figure 36. Input RL vs Frequency as a Function Voltage

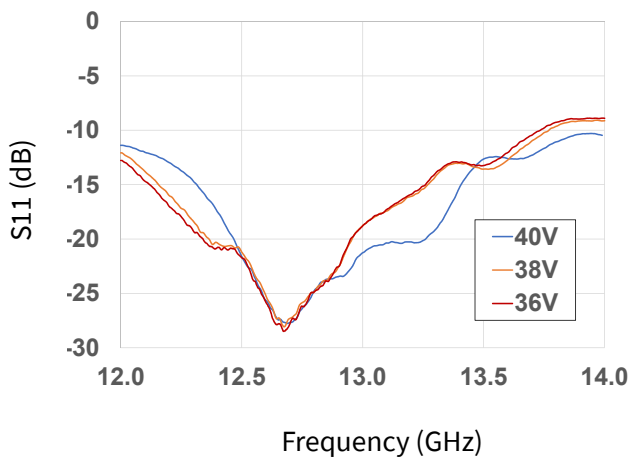


Figure 37. Input RL vs Frequency as a Function of IDQ

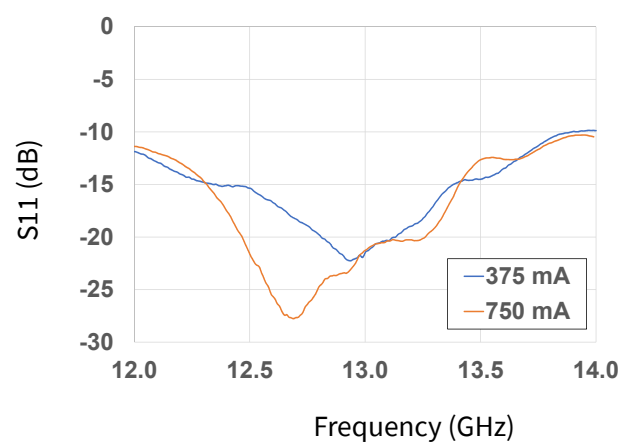


Figure 38. Output RL vs Frequency as a Function of Voltage


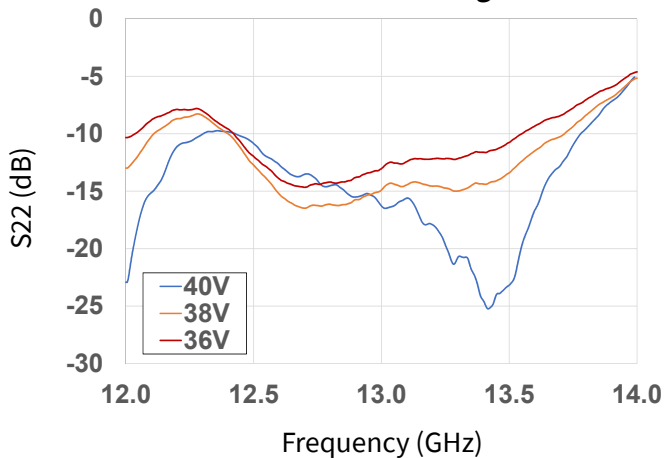


Figure 39. Output RL vs Frequency as a Function of IDQ

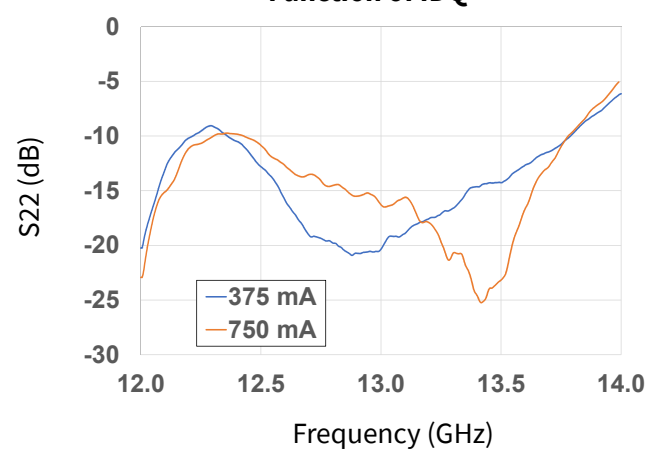

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, Pin = 33 dBm, Tone Spacing = 10 MHz, $T_{BASE} = +25\text{ }^{\circ}\text{C}$

Figure 40. IM3 vs Output Power as a Function of Temperature

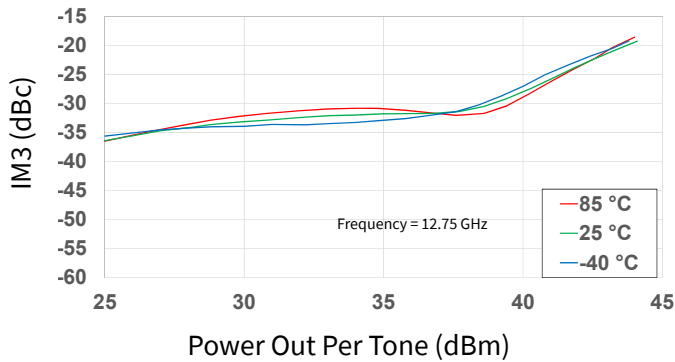


Figure 41. IM5 vs Output Power as a Function of Temperature

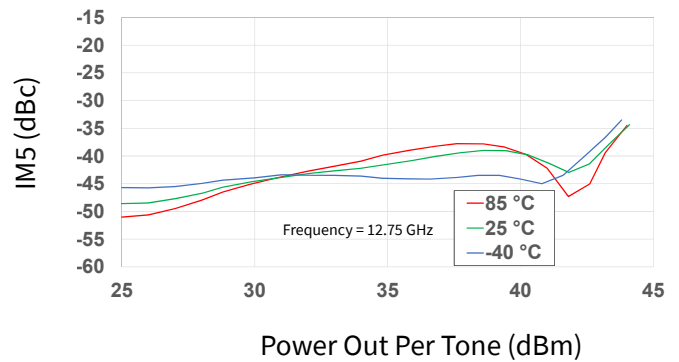


Figure 42. IM3 vs Output Power as a Function of IDQ

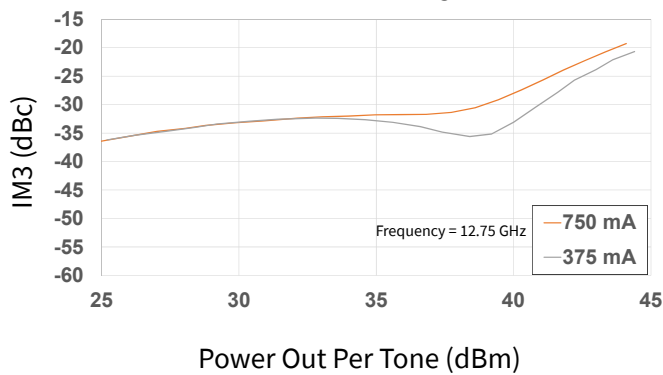


Figure 43. IM5 vs Output Power as a Function of IDQ

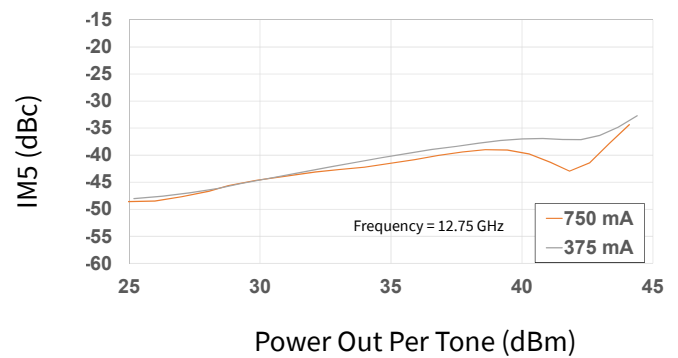


Figure 44. IM3 vs Output Power as a Function of Tone Spacing


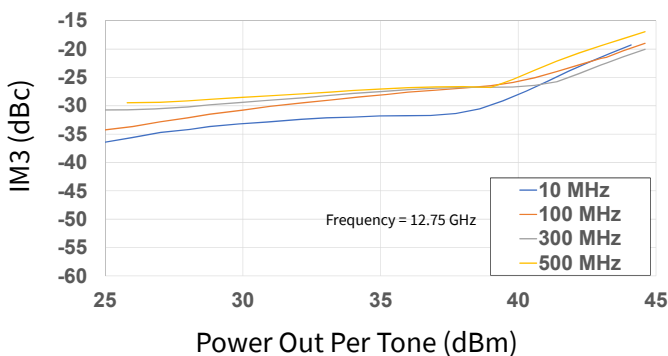


Figure 45. IM5 vs Output Power as a Function of Tone Spacing

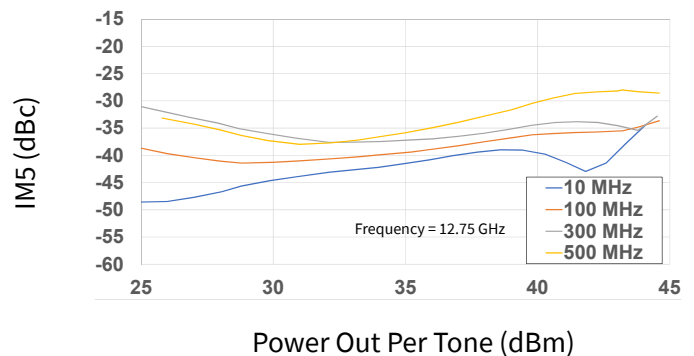

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40$ V, $I_{DQ} = 750$ mA, CW, Pin = 33 dBm, Tone Spacing = 10 MHz, $T_{BASE} = +25$ °C

Figure 46. IM3 vs Output Power as a Function of Temperature

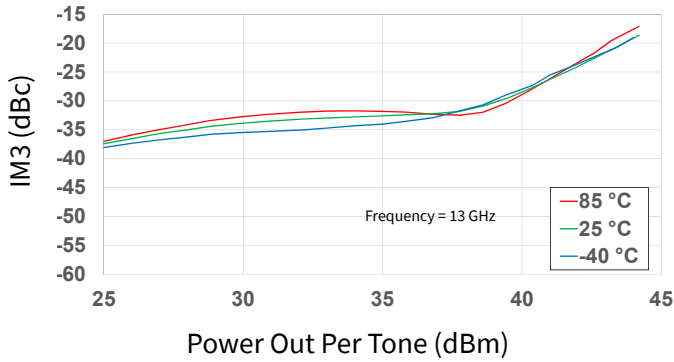


Figure 47. IM5 vs Output Power as a Function of Temperature

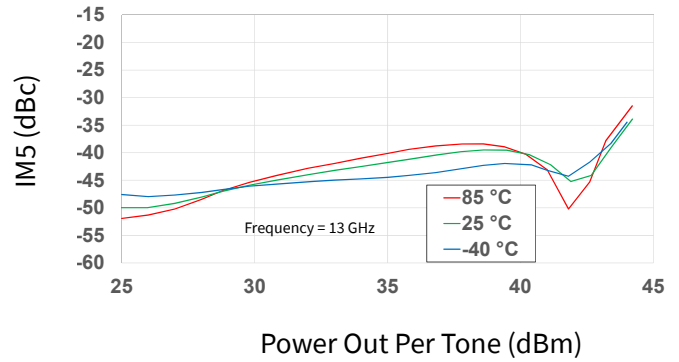


Figure 48. IM3 vs Output Power as a Function of IDQ

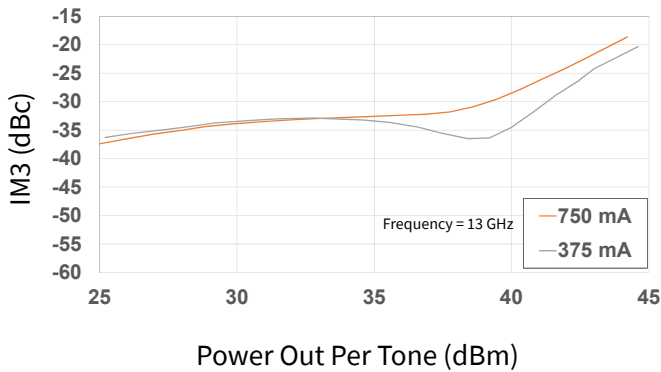


Figure 49. IM5 vs Output Power as a Function of IDQ

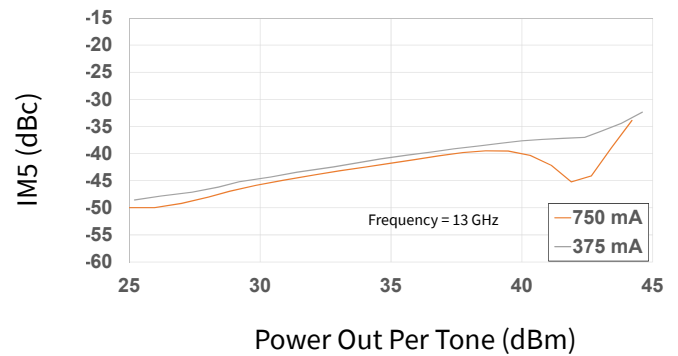


Figure 50. IM3 vs Output Power as a Function of Tone Spacing


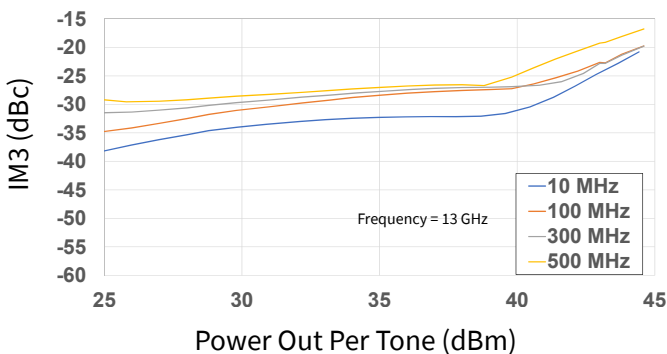


Figure 51. IM5 vs Output Power as a Function of Tone Spacing

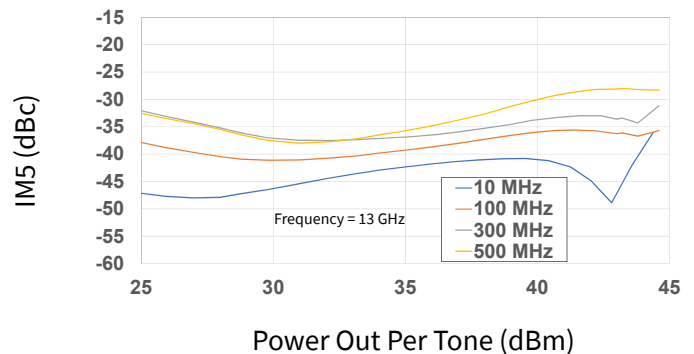

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, Pin = 33 dBm, Tone Spacing = 10 MHz, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 52. IM3 vs Output Power as a Function of Temperature

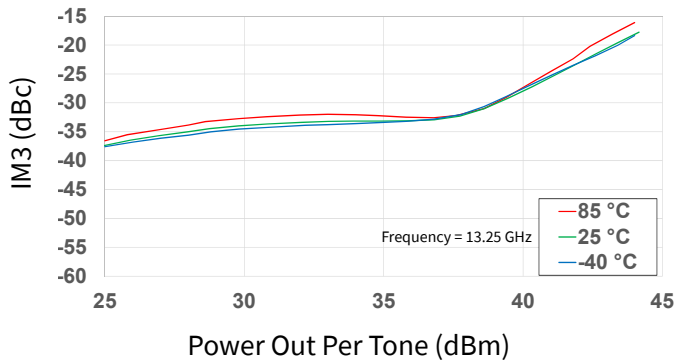


Figure 53. IM5 vs Output Power as a Function of Temperature

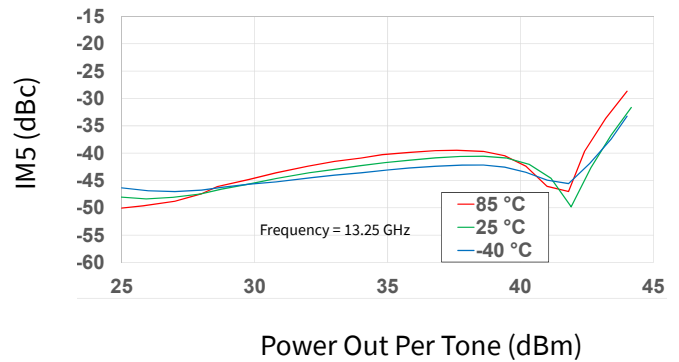


Figure 54. IM3 vs Output Power as a Function of IDQ

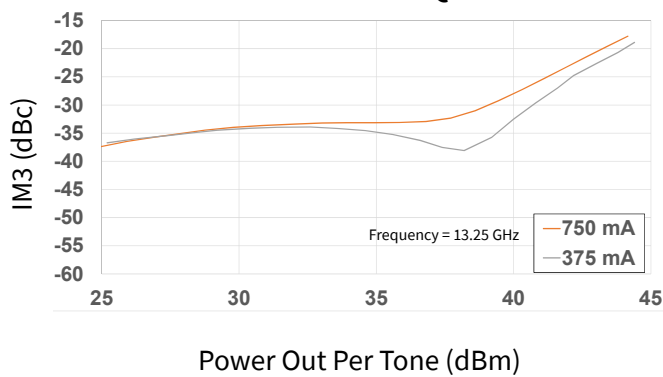


Figure 55. IM5 vs Output Power as a Function of IDQ

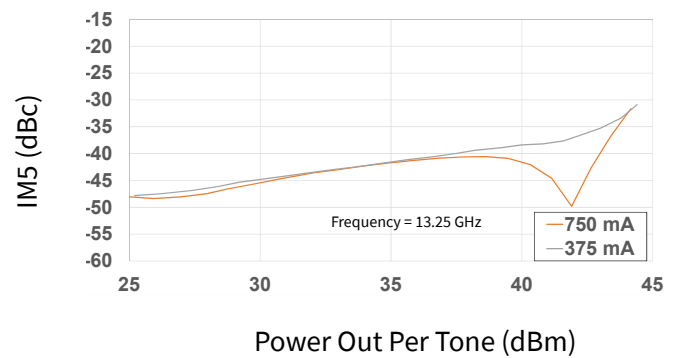


Figure 56. IM3 vs Output Power as a Function of Tone Spacing


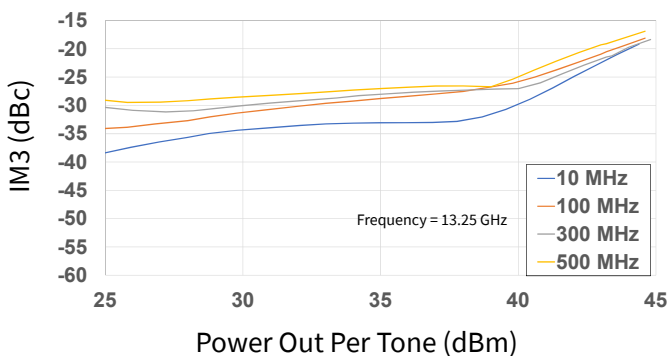


Figure 57. IM5 vs Output Power as a Function of Tone Spacing

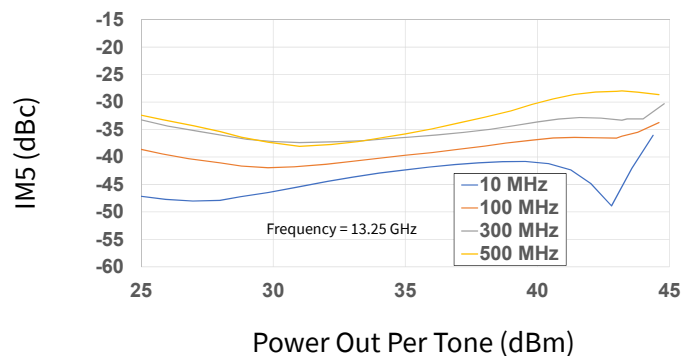

Typical Performance of the CMPA1C1D080F

Test conditions unless otherwise noted: $V_D = 40\text{ V}$, $I_{DQ} = 750\text{ mA}$, CW, Pin = 33 dBm, Tone Spacing = 10 MHz, $T_{BASE} = +25\text{ }^{\circ}\text{C}$

Figure 58. IM3 vs Tone Spacing as a Function of Frequency



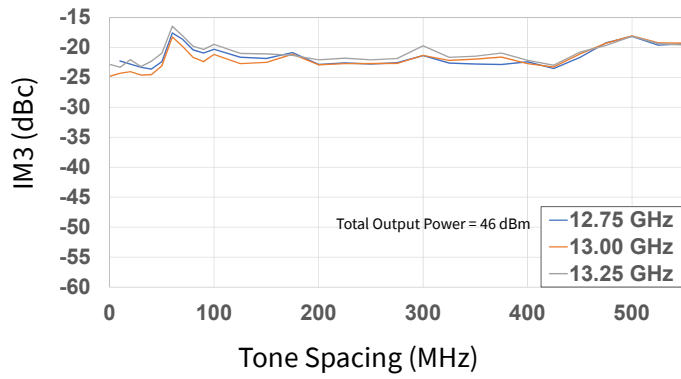



Figure 59. IM5 vs Tone Spacing as a Function of Frequency

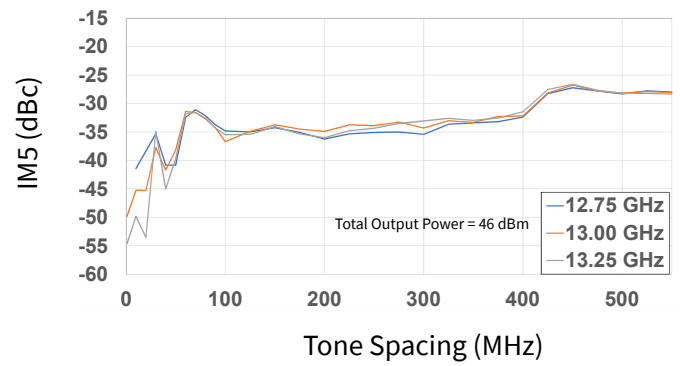

CMPA1C1D080F-AMP Evaluation Board Schematic

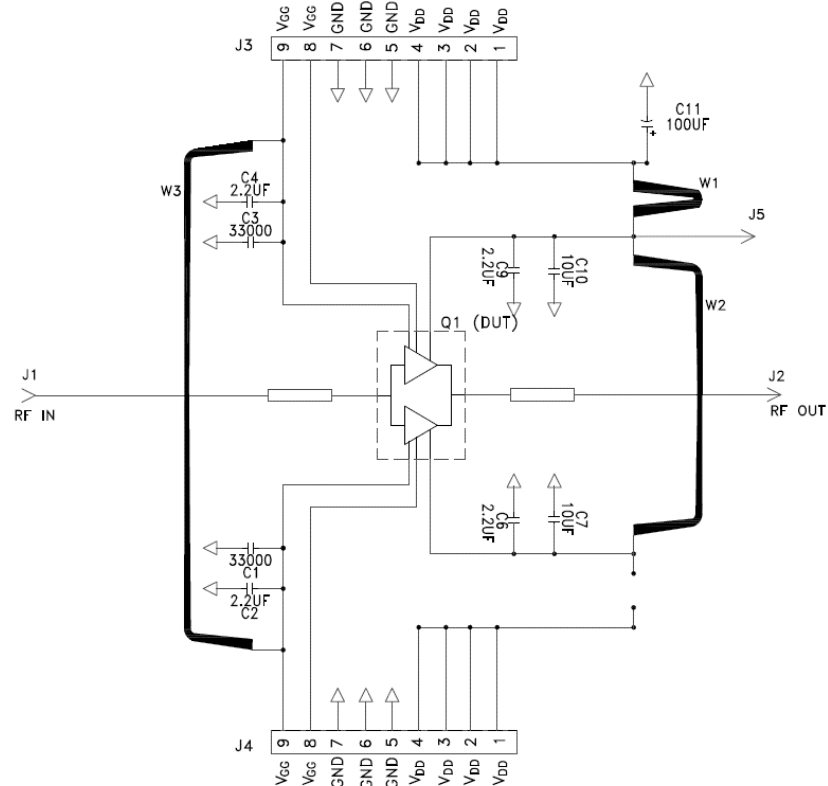

CMPA1C1D080F-AMP Evaluation Board Outline

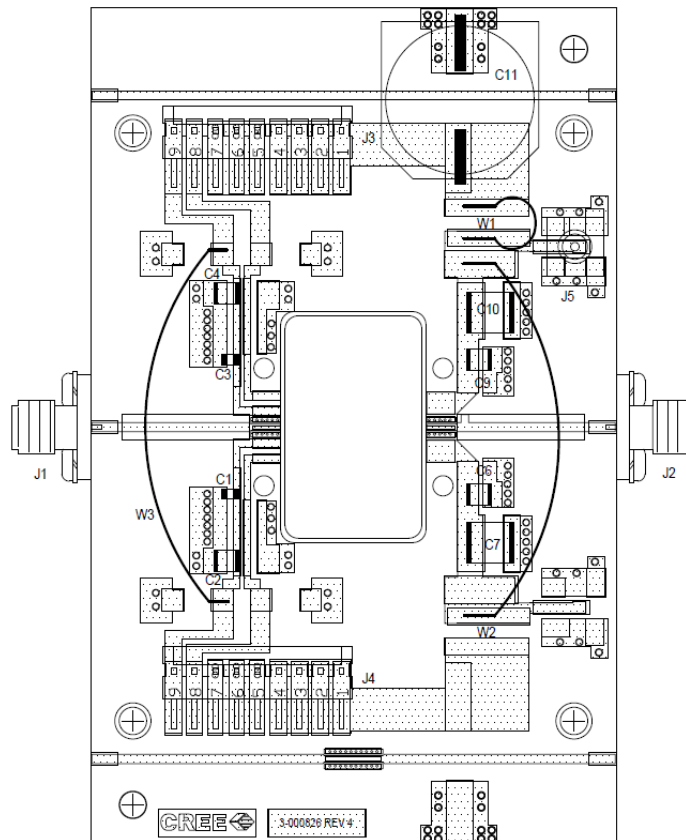

CMPA1C1D080F-AMP Evaluation Board Bill of Materials

Designator	Description	Qty
C1,C3	CAP, 33000PF, 0805,100V, X7R	2
C2,C4,C6,C9	CAP, 2.2UF, 100V, 10%, X7R, 1210	4
C7,C10	CAP, 10UF, 100V, 10%, X7R, 2220	2
C11	CAP, 100 UF, 20%, 160V, ELEC	1
W1	WIRE, 18 AWG ~ 3"	1
W2,W3	WIRE, 18 AWG ~ 1.75"	2
J1,J2	CONN, SMA, PANEL MOUNT JACK, FLANGE, 4-HOLE, BLUNT POST, 20MIL	2
J3,J4	HEADER RT>PLZ .1CEN LK 9POS	2
J5	CONN, SMB, STRAIGHT JACK RECEPTACLE, SMT, 50 OHM, Au PLATED	1
Q1	CMPA1C1D080F, 80W, 12.7-13.25GHz, GaN MMIC, 40V	1
	PCB, TEST FIXTURE, 440222 PKG	1
	BASEPLATE, CU, 2.5 X 4.0 X 0.5 IN	1
	2-56 SOC HD SCREW 1/4 SS	4
	#2 SPLIT LOCKWASHER SS	4
	CMPA1C1D080F	1


Electrostatic Discharge (ESD) Classifications

Parameter	Symbol	Class	Test Methodology
Human Body Model	HBM	1B (≥ 500 V)	JEDEC JESD22 A114-D
Charge Device Model	CDM	II (≥ 200 V)	JEDEC JESD22 C101-C

Moisture Sensitivity Level (MSL) Classification

Parameter	Symbol	Level	Test Methodology
Moisture Sensitivity Level	MSL	3 (168 hours)	IPC/JEDEC J-STD-20

Product Dimensions CPA1C1D080F (Package 440222)

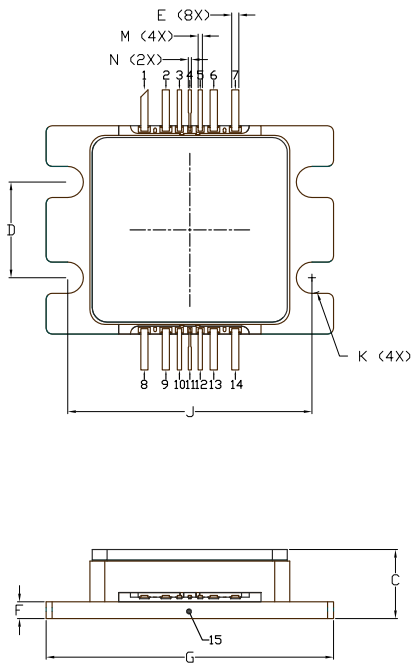

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
 4. LID MAY BE MISALIGNED TO THE BODY OF THE PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.
 5. ALL PLATED SURFACES ARE NI/AU

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.679	0.691	17.25	17.55
B	0.003	0.006	0.076	0.152
C	0.214	0.241	5.44	6.12
D	0.307	0.323	7.80	8.20
E	0.016	0.032	0.406	0.813
F	0.047	0.063	1.194	1.600
G	0.936	0.954	23.77	24.23
H	0.912	0.930	23.16	23.62
J	0.795	0.811	20.19	20.60
K	0.094	0.110	2.39	2.79
L	0.062	0.078	1.575	1.981
M	0.006	0.022	0.152	0.559
N	0.004	0.018	0.102	0.457

PIN	DESC.
1	Bias Gate 2
2	Bias Gate 2
3	GND
4	RF IN
5	GND
6	Bias Gate 1
7	Bias Gate 1
8	Bias Drain 2
9	Bias Drain 2
10	GND
11	RF OUT
12	GND
13	Bias Drain 1
14	Bias Drain 1

Part Number System

CMPA1C1D080F

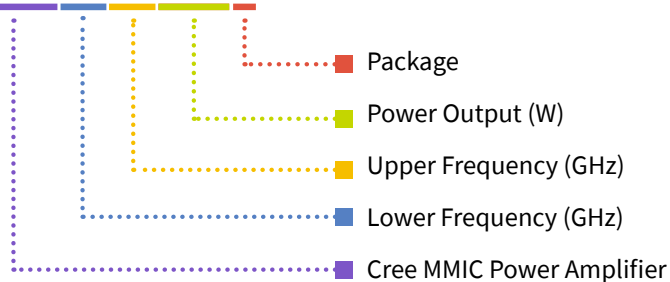


Table 1.


Parameter	Value	Units
Lower Frequency	12.75	GHz
Upper Frequency	13.25	GHz
Power Output	80	W
Package	Flange	-

Note 1: Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Table 2.

Character Code	Code Value
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9
Examples:	1A = 10.0 GHz 2H = 27.0 GHz

Product Ordering Information

Order Number	Description	Unit of Measure	Image
CMPA1C1D080F	GaN HEMT	Each	
CMPA1C1D080F-AMP	Test board with GaN MMIC installed	Each	

For more information, please contact:

4600 Silicon Drive
Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com

Notes

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.