


**SERIES: PRQ150W | DESCRIPTION: DC-DC CONVERTER**
**FEATURES**

- 150 W isolated output
- 1/4-brick package with industry standard pin-out
- 4:1 ultra-wide input voltage range
- single regulated output
- high efficiency up to 91%
- output short circuit, over current, over voltage, & over temperature protection
- 2250 Vdc isolation
- EN 62368-1
- available with heat sink or base plate
- remote on/off control


**MODEL**

|                   | input voltage |             | output voltage | output current max | output power max | ripple and noise <sup>1</sup> max | efficiency <sup>2</sup> typ |
|-------------------|---------------|-------------|----------------|--------------------|------------------|-----------------------------------|-----------------------------|
|                   | typ (Vdc)     | range (Vdc) |                |                    |                  |                                   |                             |
| PRQ150W-Q48-S5-D  | 48            | 18~75       | 5              | 30.0               | 150              | 250                               | 88                          |
| PRQ150W-Q48-S12-D | 48            | 18~75       | 12             | 12.5               | 150              | 250                               | 91                          |
| PRQ150W-Q48-S15-D | 48            | 18~75       | 15             | 10.0               | 150              | 250                               | 89                          |
| PRQ150W-Q48-S24-D | 48            | 18~75       | 24             | 6.25               | 150              | 250                               | 91                          |
| PRQ150W-Q48-S48-D | 48            | 18~75       | 48             | 3.13               | 150              | 250                               | 91                          |

Notes: 1. 20MHz bandwidth, nominal input, full load  
 2. Efficiency is measured in nominal input voltage and rated output load.

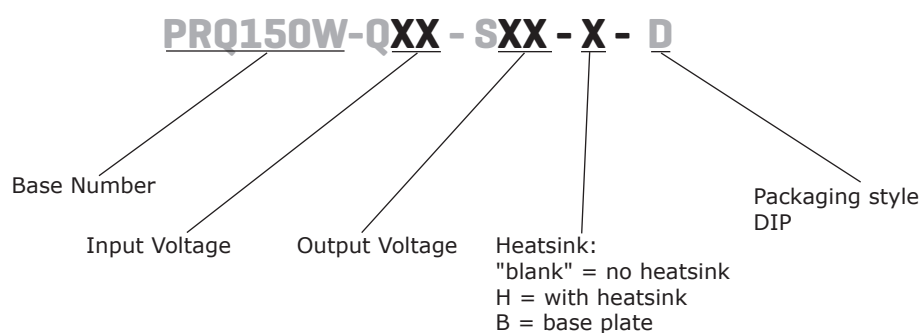**PART NUMBER KEY**


## INPUT

| parameter                  | conditions/description                                                                                   | min  | typ | max      | units |
|----------------------------|----------------------------------------------------------------------------------------------------------|------|-----|----------|-------|
| operating input voltage    |                                                                                                          | 18   | 48  | 80       | Vdc   |
| start-up voltage           |                                                                                                          |      |     | 18       | Vdc   |
| surge voltage              | for maximum 1 second                                                                                     | -0.7 |     | 90       | Vdc   |
| remote on/off <sup>1</sup> | module ON: REM pin open or pulled high (3.5~12 Vdc)<br>module OFF: REM pin pulled low to GND (0~1.2 Vdc) |      |     |          |       |
|                            | input current when OFF                                                                                   |      | 2   | 10       | mA    |
| filter                     | Pi filter                                                                                                |      |     |          |       |
| current                    | full load/no load                                                                                        |      |     | 3634/200 | mA    |

Note: 1. The voltage of ctrl pin is relative to input pin GND.

## OUTPUT

| parameter               | conditions/description                        | min | typ      | max        | units  |
|-------------------------|-----------------------------------------------|-----|----------|------------|--------|
| maximum capacitive load | 5 Vdc output models                           |     |          | 6,000      | μF     |
|                         | 12 Vdc & 15 Vdc output models                 |     |          | 2,000      | μF     |
|                         | 24 Vdc output models                          |     |          | 1,000      | μF     |
|                         | 48 Vdc output models                          |     |          | 450        | μF     |
| line regulation         | low line to high line                         |     | ±0.2     | ±0.5       | %      |
| load regulation         | 5~100% load                                   |     | ±0.5     | ±0.75      | %      |
| set-point accuracy      | 0~100% load                                   |     | ±1       | ±3         | %      |
| switching frequency     | PWM mode                                      |     | 250      |            | kHz    |
| transient response      | 25% load step change                          |     |          |            |        |
|                         | 5 Vdc output model<br>all other output models |     | ±3<br>±3 | ±7.5<br>±5 | %<br>% |
| temperature coefficient | full load                                     |     |          | ±0.03      | %/°C   |
| trim range              |                                               | 90  |          | 110        | %      |
| sense range             |                                               |     |          | 105        | %      |

## PROTECTIONS

| parameter                   | conditions/description            | min | typ | max | units |
|-----------------------------|-----------------------------------|-----|-----|-----|-------|
| over voltage protection     |                                   | 110 |     | 160 | %     |
| over current protection     |                                   | 110 |     | 150 | %     |
| short circuit protection    | continuous, auto recovery, hiccup |     |     |     |       |
| over temperature protection |                                   |     | 115 | 120 | °C    |

## SAFETY AND COMPLIANCE

| parameter             | conditions/description                                                               | min   | typ   | max | units  |
|-----------------------|--------------------------------------------------------------------------------------|-------|-------|-----|--------|
| isolation voltage     | input to output, 5mA for 1 minute                                                    | 2,250 |       |     | Vdc    |
|                       | input to case, 5mA for 1 minute                                                      | 1,500 |       |     | Vdc    |
|                       | output to case, 5mA for 1 minute                                                     | 500   |       |     | Vdc    |
| isolation resistance  | input-output at 500 Vdc                                                              | 100   |       |     | MΩ     |
| isolation capacitance | input to output at 100 KHz/0.1 V                                                     |       | 2,200 |     | pF     |
| safety approvals      | certified to 62368: EN, IEC                                                          |       |       |     |        |
| conducted emissions   | CISPR32/EN55032 CLASS A (see Fig. 2 for recommended circuit)                         |       |       |     |        |
| radiated emissions    | CISPR32/EN55032 CLASS A (see Fig. 2 for recommended circuit)                         |       |       |     |        |
| ESD                   | IEC/EN61000-4-2, EN50121-3-2 Contact ±6KV Air ±8KV, perf. Criteria B                 |       |       |     |        |
| radiated immunity     | IEC/EN61000-4-3, EN50121-3-2 10V/m, perf. Criteria A                                 |       |       |     |        |
| EFT/burst             | IEC/EN61000-4-4, EN50121-3-2 ±2KV, perf. Criteria A                                  |       |       |     |        |
| surge                 | EN50121-3-2 differential mode ±1KV, 1.2/50us, source impedance 42Ω, perf. Criteria B |       |       |     |        |
| conducted immunity    | IEC/EN61000-4-6, EN50121-3-2 10 Vr.m.s, perf. Criteria A                             |       |       |     |        |
| MTBF                  | MIL-HDBK-217 at 25°C                                                                 | 500   |       |     | kHours |
| RoHS                  | yes                                                                                  |       |       |     |        |

## ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curve     | -40 |     | 85  | °C    |
| storage temperature   |                        | -55 |     | 125 | °C    |
| storage humidity      | non-condensing         | 5   |     | 95  | %     |

## SOLDERABILITY

|                          |                                                        |  |  |     |    |
|--------------------------|--------------------------------------------------------|--|--|-----|----|
| pin soldering resistance | wave-soldering, 10 seconds                             |  |  | 260 | °C |
| temperature              | soldering spot is 1.5 mm away from case for 10 seconds |  |  | 300 | °C |

## MECHANICAL

| parameter      | conditions/description                                                                   | min | typ | max | units |
|----------------|------------------------------------------------------------------------------------------|-----|-----|-----|-------|
| dimensions     | 61.8 x 40.2 x 12.7                                                                       |     |     |     | mm    |
|                | with base plate 62.0 x 56.0 x 14.6                                                       |     |     |     | mm    |
|                | with heat sink 61.8 x 40.2 x 27.7                                                        |     |     |     | mm    |
| case material  | aluminum alloy case, black plastic bottom, flame-retardant and heat-resistant (UL94 V-0) |     |     |     |       |
| weight         |                                                                                          |     | 89  |     | g     |
|                | with base plate                                                                          |     | 109 |     | g     |
|                | with heat sink                                                                           |     | 120 |     | g     |
| cooling method | natural convection (20 LFM)                                                              |     |     |     |       |

## MECHANICAL DRAWING

units: mm [inches]


pin 1,2,3,5,6,7's diameter: 1.00 [0.039]

pin 4,8's diameter: 1.50 [0.059]

pin diameter tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]general tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]

mounting hole screwing torque: Max 0.4 N·m

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | FUNCTION |
| 1               | +Vin     |
| 2               | REM      |
| 3               | -Vin     |
| 4               | 0V       |
| 5               | Sense-   |
| 6               | Trim     |
| 7               | Sense+   |
| 8               | +Vo      |

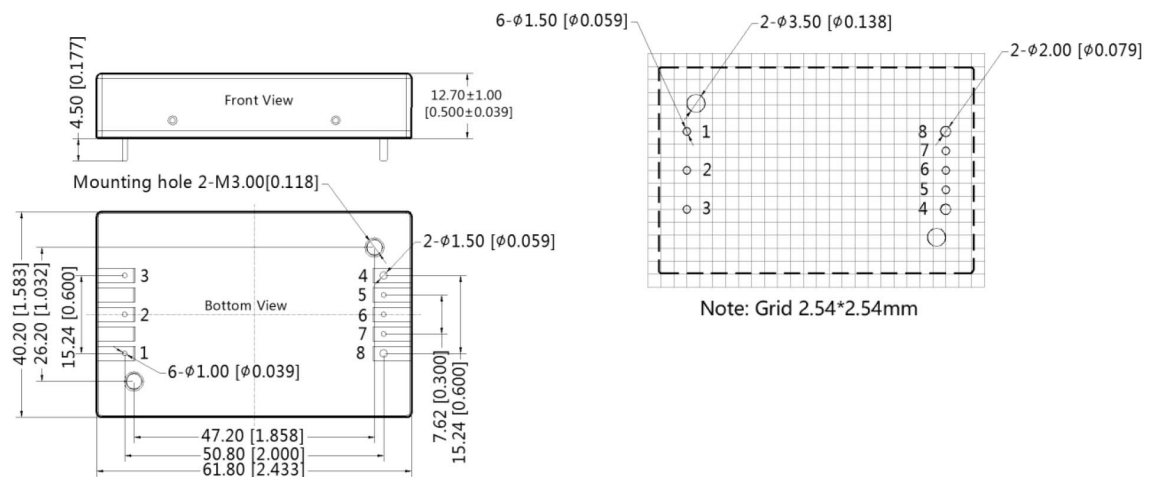

## MECHANICAL DRAWING (CONTINUED)

### with base plate

units: mm [inches]


pin 1,2,3,5,6,7's diameter: 1.00 [0.039]

pin 4,8's diameter: 1.50 [0.059]

pin diameter tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]general tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]

mounting hole screwing torque: Max 0.4 N·m

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | FUNCTION |
| 1               | +Vin     |
| 2               | REM      |
| 3               | -Vin     |
| 4               | 0V       |
| 5               | Sense-   |
| 6               | Trim     |
| 7               | Sense+   |
| 8               | +Vo      |

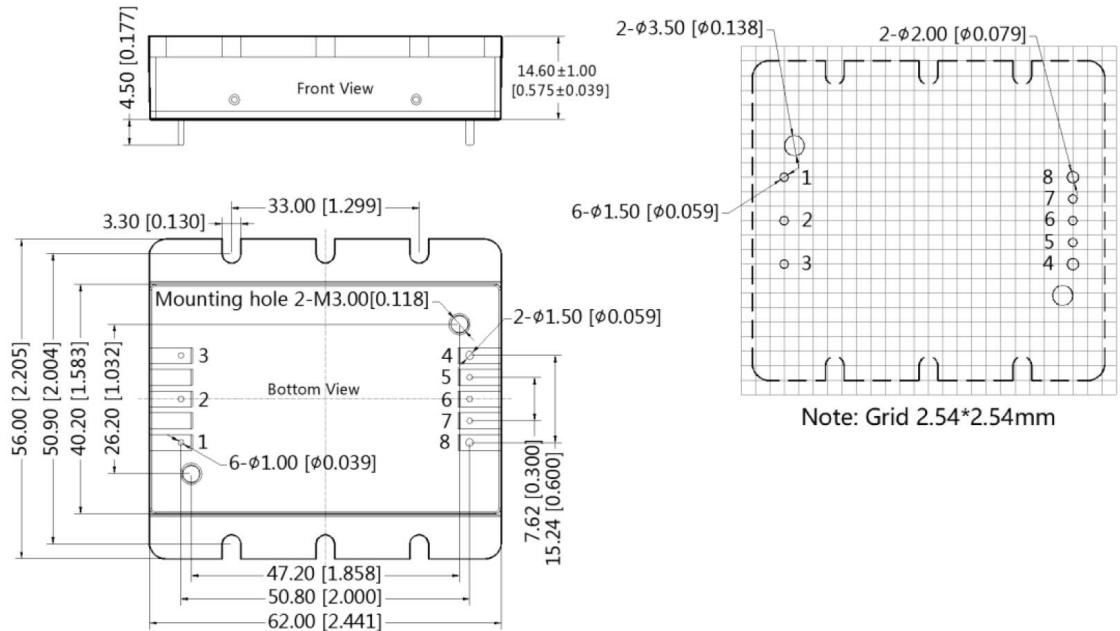

### with heatsink

units: mm [inches]


pin 1,2,3,5,6,7's diameter: 1.00 [0.039]

pin 4,8's diameter: 1.50 [0.059]

pin diameter tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]general tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]


mounting hole screwing torque: Max 0.4 N·m

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | FUNCTION |
| 1               | +Vin     |
| 2               | REM      |
| 3               | -Vin     |
| 4               | 0V       |
| 5               | Sense-   |
| 6               | Trim     |
| 7               | Sense+   |
| 8               | +Vo      |

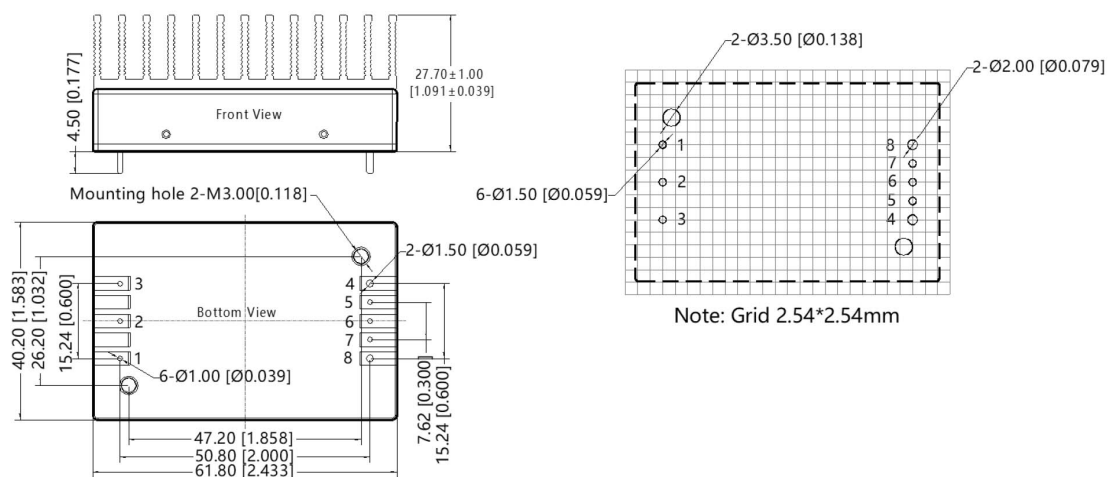


## DERATING CURVES

**TEMPERATURE DERATING CURVE**  
**PRQ150W-Q48-S24-D (Baseplate version)**  
( $V_{in} = 24\text{ V}$ )

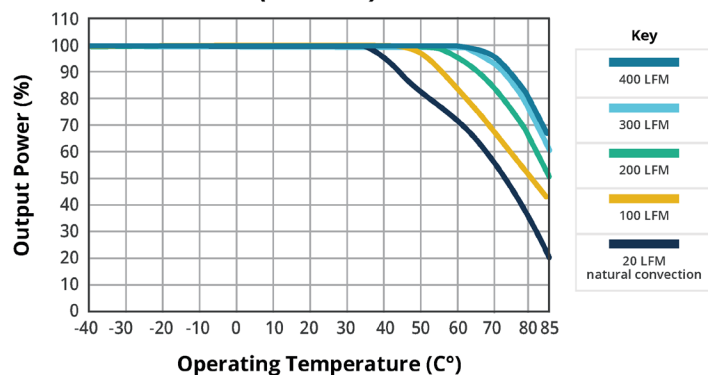


**TEMPERATURE DERATING CURVE**  
**PRQ150W-Q48-S24-H-D (Heatsink version)**  
( $V_{in} = 24\text{ V}$ )

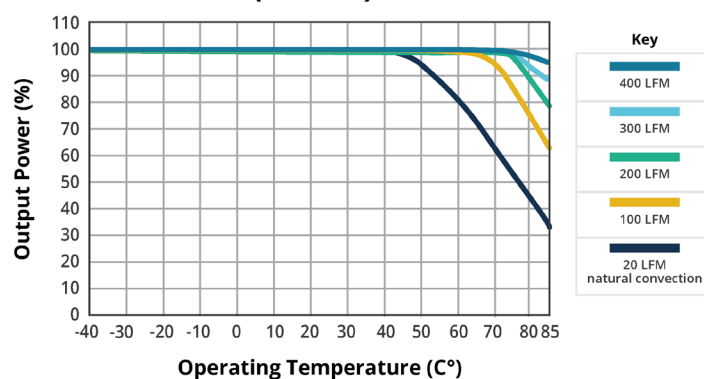


## EFFICIENCY CURVES

**EFFICIENCY VS INPUT VOLTAGE**  
(Full load)

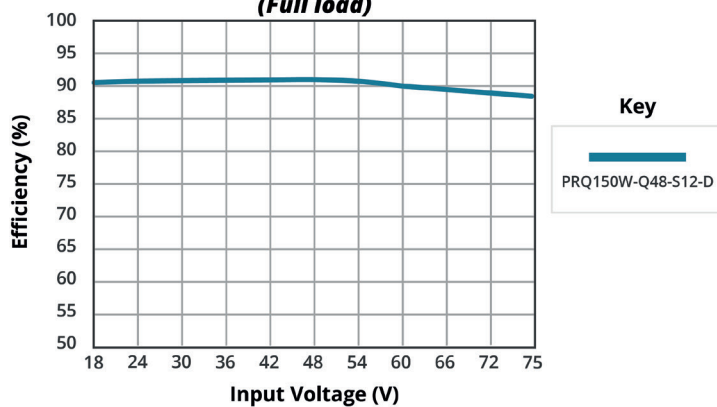

**EFFICIENCY VS OUTPUT LOAD**  
( $V_{in} = 48\text{ V}$ )

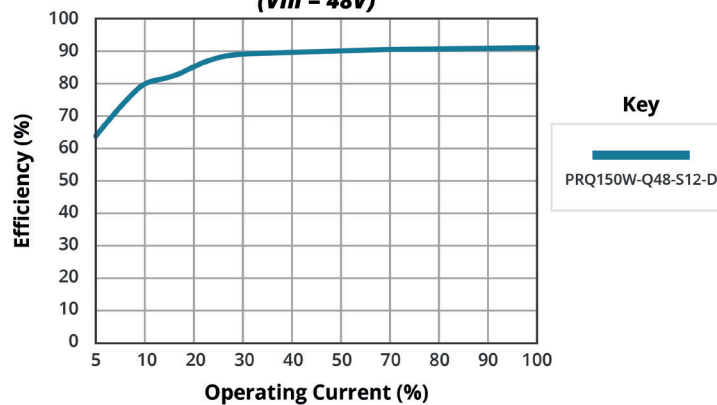

## APPLICATION CIRCUIT

1. Let's change to: It is recommended to use the circuit shown in Fig. 1 during product testing and application, or otherwise ensure that at least 220  $\mu\text{F}$  of electrolytic capacitors are connected at the input in order to ensure adequate voltage surge suppression and protection.
2. It is recommended to increase the value of  $C_{in}$  and pay attention to the unstable input voltage if the product input side is paralleled with motor drive circuit and/or larger energy transient circuits, to ensure the stability of input terminal and avoid repeatedly start-up problems due to input voltage lower than under-voltage protection point.
3. It is recommended to increase the output capacitance, limited to the capacitive load specification and/or increasing the voltage clamping circuit (such as TVS) if the output terminal is inductive device such as relay or a motor, to ensure adequate voltage surge suppression and protection.
4. Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values  $C_{in}$  and  $C_{out}$  and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified maximum capacitive load value of the product.

Figure 1

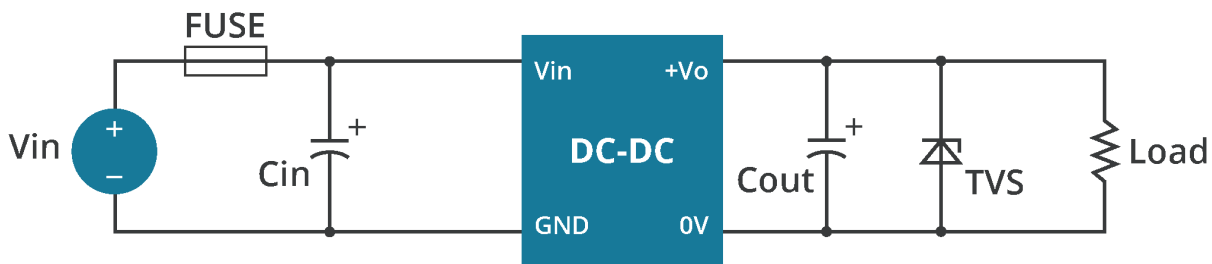


Table 1

| Output voltage (Vdc) | FUSE             | $C_{in}$ ( $\mu\text{F}$ ) | $C_{out}$ ( $\mu\text{F}$ ) | TVS      |
|----------------------|------------------|----------------------------|-----------------------------|----------|
| 5                    | 15A<br>slow blow | 220 $\mu\text{F}$          | 470 $\mu\text{F}$           | SMDJ6.0A |
| 12                   |                  |                            | 220 $\mu\text{F}$           | SMDJ14A  |
| 15                   |                  |                            |                             | SMDJ17A  |
| 24                   |                  |                            | 110 $\mu\text{F}$           | SMDJ28A  |
| 48                   |                  |                            |                             | SMDJ54A  |

Note: Please pay attention to the ambient temperature of the product when using an external capacitor, increase the electrolytic capacitor values to at least 1.5 times the original parameter if the ambient temperature is low (such as  $-25^{\circ}\text{C}$ ).

## EMC RECOMMENDED CIRCUITS

Figure 2


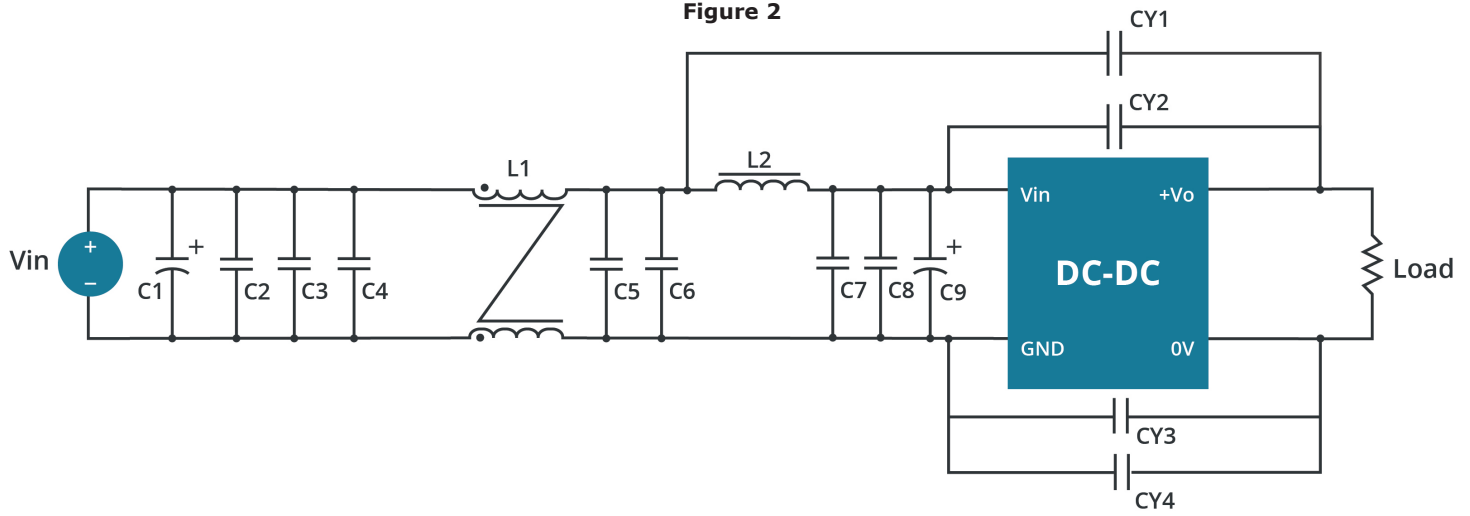


Table 2

| List of Components         | Recommended Component value        |
|----------------------------|------------------------------------|
| C1                         | 150 $\mu$ F electrolytic capacitor |
| C9                         | 47 $\mu$ F electrolytic capacitor  |
| C2, C3, C4, C5, C6, C7, C8 | 2.2 $\mu$ F/100V ceramic capacitor |
| L1                         | 1.0mH/15A common mode inductor     |
| L2                         | 1.5 $\mu$ F/15A inductance         |
| CY1, CY2, CY3, CY4         | 1nF Y1 safety capacitor            |

## APPLICATION NOTES

Figure 3

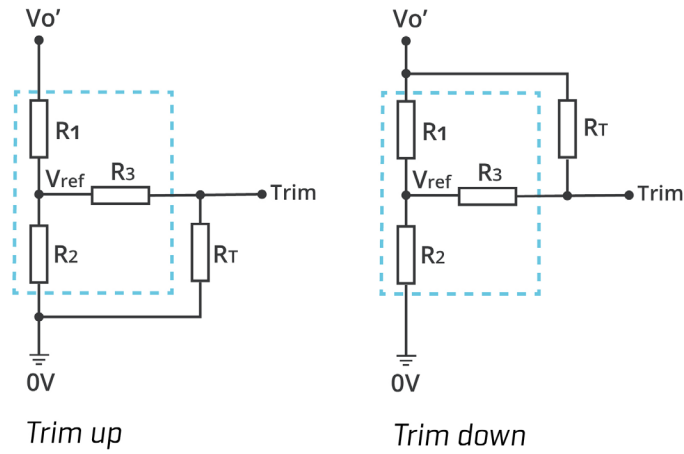

$$\begin{aligned}
 \text{Up:} \quad R_T &= \frac{a R_2}{R_2 - a} - R_3 & a &= \frac{V_{ref}}{V_o' - V_{ref}} \cdot R_1 \\
 \text{Down:} \quad R_T &= \frac{a R_1}{R_1 - a} - R_3 & a &= \frac{V_o' - V_{ref}}{V_{ref}} \cdot R_2
 \end{aligned}$$

$R_T$  = Trim Resistor value  
 $a$  = self-defined parameter  
 $V_o'$  = Trim up/down voltage

Table 3


| Vout (Vdc) | R1 (KΩ) | R2 (KΩ) | R3 (KΩ) | Vref (V) |
|------------|---------|---------|---------|----------|
| 5          | 3.036   | 3.0     | 10      | 2.5      |
| 12         | 11.0    | 2.87    | 15      | 2.5      |
| 15         | 14.03   | 2.8     | 15      | 2.5      |
| 24         | 24.872  | 2.87    | 15      | 2.5      |
| 48         | 53.017  | 2.913   | 15      | 2.5      |

Note: When using the Trim down function make sure that the  $R_T$  resistor value is calculated correctly. If the Trim pin is shorted with +  $V_o$ , or its value is too low, the or the output voltage  $V_o'$  would be lower than 0.9 $V_o$ , which may cause the product to fail.

## REMOTE SENSE APPLICATION

Figure 4


### REMOTE SENSE CONNECTION IF NOT USED

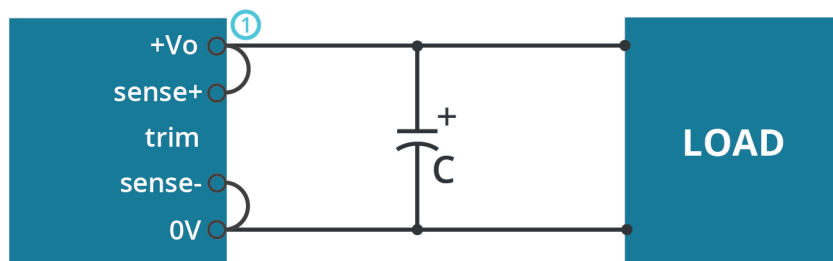

- Note:
1. Lines must be kept as short as possible.
  2. If the sense function is not used for remote regulation the user must connect the +Sense to +Vo and -Sense to 0V at the DC-DC converter pins and will compensate for voltage drop across pins only.
  3. The connections between Sense lines and their respective power lines must be kept as short as possible, otherwise they may be picking up noise, interference and/or causing unstable operation of the power module.

Figure 5

### REMOTE SENSE CONNECTION USED FOR COMPENSATION

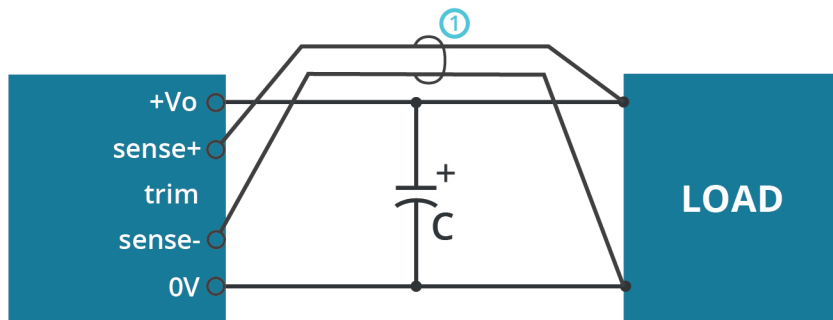

- Note:
1. In cables and discrete wiring applications, twisted pair or other techniques should be implemented.
  2. Using remote sense with long wires may cause unstable output, please contact technical support if long wires must be used
  3. PCB-tracks or cables/wires for Remote Sense must be kept as short as possible. Twisted pair or shielded wires are suggested for remote compensation and must be kept as short as possible.
  4. We recommend using adequate cross section for PCB-track layout and/or cables to connect the power supply module to the load in order to keep the voltage drop below 0.3V and to make sure the power supply's output voltage remains within the specified range.
  5. Note that large wire impedance may cause oscillation of the output voltage and/or increased ripple. Consult technical support or factory for further advice of sense operation.

## REVISION HISTORY

| rev. | description     | date       |
|------|-----------------|------------|
| 1.0  | initial release | 10/25/2021 |

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.