

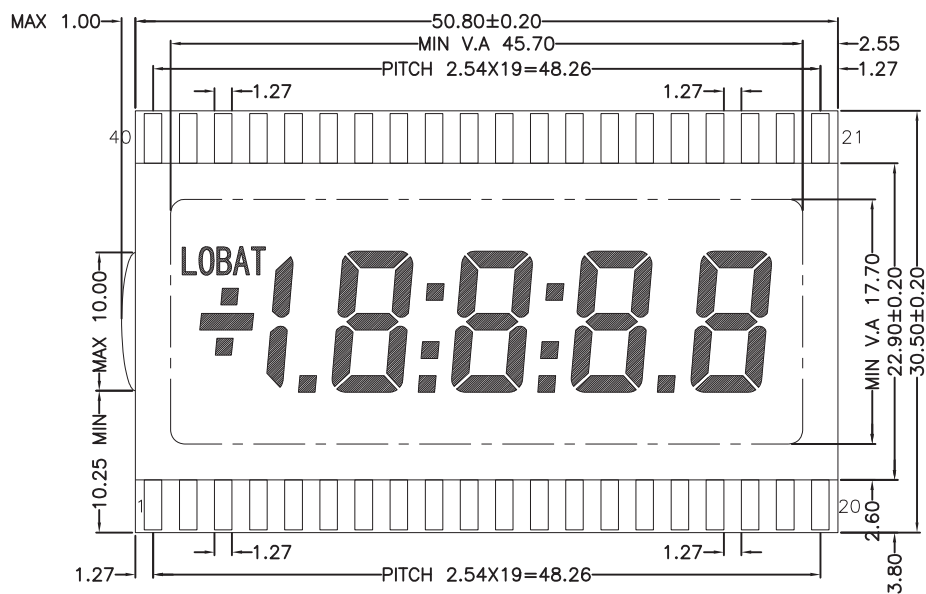


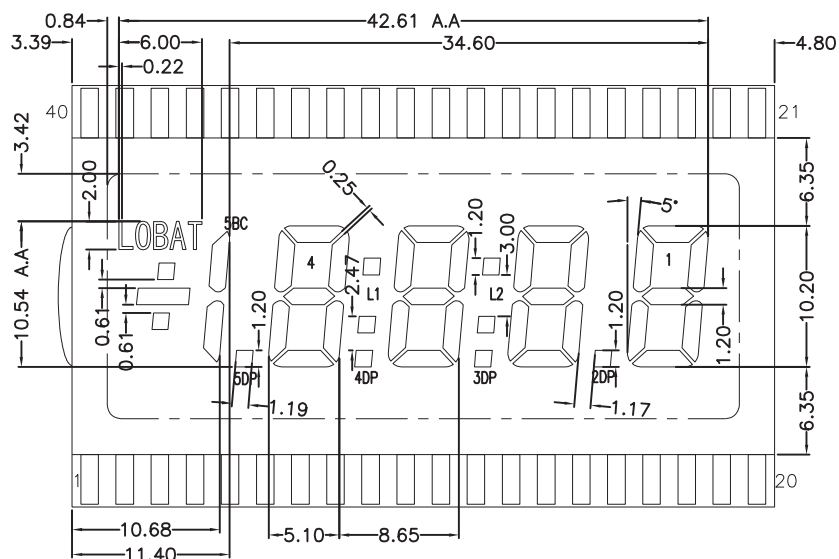

VIEWING DIRECTION

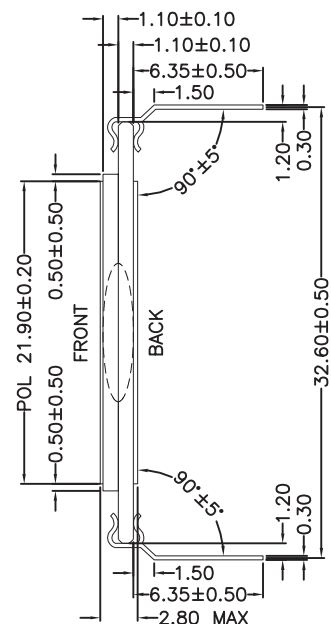

| PIN  | 1    | 2  | 3   | 4   | 5  | 6  | 7  | 8   | 9  | 10 | 11 | 12  | 13 | 14 | 15 | 16  | 17 | 18    | 19 | 20   |
|------|------|----|-----|-----|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|-------|----|------|
| COM1 | COM1 | □  | 5BC | 5DP | 4E | 4D | 4C | 4DP | 3E | 3D | 3C | 3DP | 2E | 2D | 2C | 2DP | 1E | 1D    | 1C | 1B   |
| PIN  | 21   | 22 | 23  | 24  | 25 | 26 | 27 | 28  | 29 | 30 | 31 | 32  | 33 | 34 | 35 | 36  | 37 | 38    | 39 | 40   |
| COM1 | 1A   | 1F | 1G  | 2B  | 2A | 2F | 2G | L2  | 3B | 3A | 3F | 3G  | L1 | 4B | 4A | 4F  | 4G | LOBAT | □  | COM1 |

NOTES:

1. Polarizer: Reflective
2. Display Module: TN, Positive
3. Viewing Direction: 6 O'CLOCK
4. Driving Condition: STATIC

5. Operating Voltage: 3.3 V
6. Operating Temp: -30°C TO +80°C
7. Storage Temp: -30°C TO +80°C
8. Connection: Pin



DRAWN: Wang  
CHECKED:  
APP:

LCD NO.:  
DATE: 05/13/14

UNITS: MM

DWG NO.: OD-454

SHEET: 1 of 1