


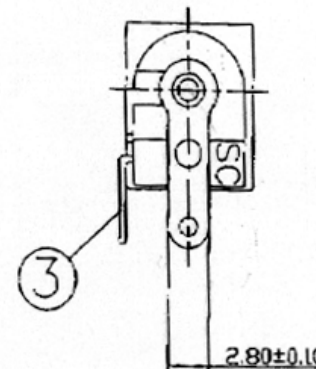
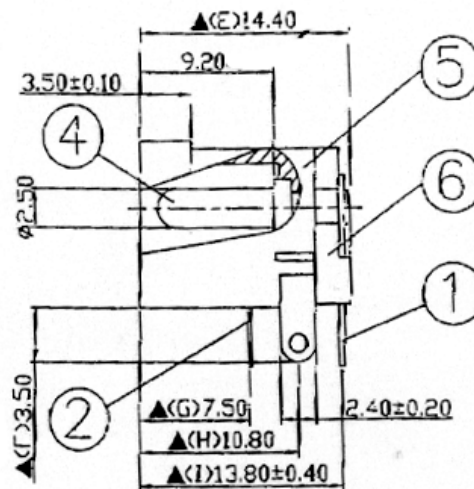


6	Cover	PBT + 30% Fiber Class	1	Black Color
5	Housing	PBT + 30% Fiber Class	1	Black Color
4	Pin (2,5Ø)	Copper	1	Nickel Plated
3	Break Terminal	0.4T Brass	1	Silver Plated
2	Sleeve Spring	0.2 t Phosphor Bronze	1	Silver Plated
1	Pin Terminal	0.4 T Brass	1	Silver Plated
N0	Descriptions	Material	Q'ty	Finish


Rev.	Description	Date	Approved
A	Update label	02/20/02	PS
B	Update contact description	03/20/03	PM
C	Update picture, Rfs.4399, JL	09/15/04	DMR

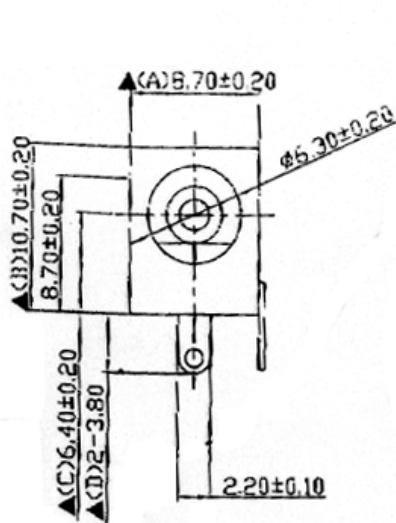

Pin Hole Layout
(Jack Bottom View)

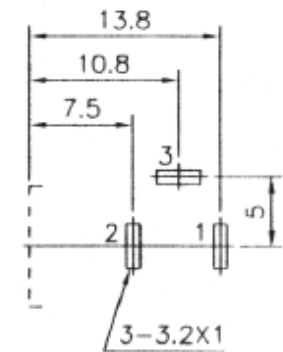

Hole Layout
Bottom View



Normally Open
Contact

Note:

- All dimensions are in mm.
- Specification:

Rating 2A, 16 VDC
Withstanding voltage AC 500V, 60 Hz for 1 min.
Insulation resistance 100M Ohm (min.) at 500V DC
Contact resistance 30m Ohm Max at AC 100mA 1 KHz

GlobTek, Inc.

186 Veterans Dr. Northvale, NJ 07647

DWG Title: **DC Power Jack 5.5 x 2.5 mm**

DWG No: **G-1005B**

Rev: 'C'

Date
09/16/04

Init.By: JL
Drawn: NF

Approved
DMR