


| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| A    | RELEASE     | 2012.11.12 |

NOTES:  
 Insulator Material: PBT, UL 94V-0  
 Contact Plating: Flash Gold  
 Contact Material: Brass

Current Rating : 1A AC,DC  
 Contact Resistance: 20MΩ Max.  
 Dielectric Withstanding: AC 500V  
 Insulator Resistance: 1000MΩ Min.  
 Operating Temp.: -40°C~+105°C

| NUMBER OF POSITIONS | DIMENSIONS |       |
|---------------------|------------|-------|
|                     | A          | B     |
| 06                  | 4.00       | 21.60 |
| 08                  | 6.00       | 23.60 |
| 10                  | 8.00       | 25.60 |
| 12                  | 10.00      | 27.60 |
| 14                  | 12.00      | 29.60 |
| 16                  | 14.00      | 31.60 |
| 20                  | 18.00      | 35.60 |
| 24                  | 22.00      | 39.60 |
| 26                  | 24.00      | 41.60 |
| 30                  | 28.00      | 45.60 |
| 34                  | 32.00      | 49.60 |
| 40                  | 38.00      | 55.60 |
| 44                  | 42.00      | 59.60 |
| 50                  | 48.00      | 65.60 |
| 60                  | 58.00      | 75.60 |

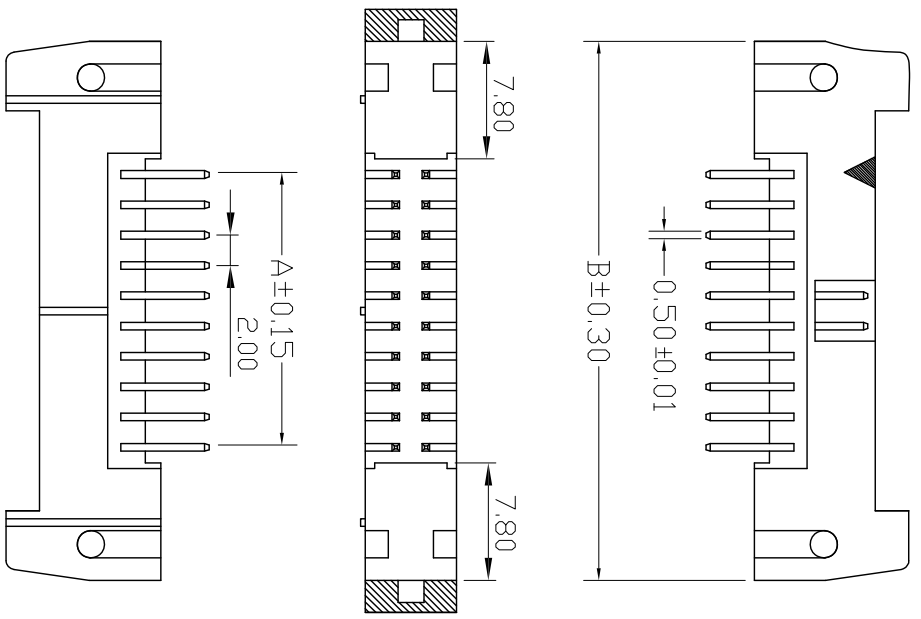

| UNLESS TOLERANCE |                       | DRAW BY    |
|------------------|-----------------------|------------|
| GENERAL          | ANGLE                 | DESIGN BY  |
| X. $\pm 0.30$    | X°. $\pm 3.0^\circ$   | CHECK BY   |
| .X $\pm 0.20$    | .X° $\pm 2.0^\circ$   | APPROVE BY |
| .XX $\pm 0.15$   | .XX° $\pm 1.0^\circ$  | SCALE      |
| .XXX $\pm 0.08$  | .XXX° $\pm 0.5^\circ$ | SHEET      |
|                  |                       | UNIT       |

**CnC Tech,LLC**  
 Part No.  
 3110-XX-001-11-00  
 SCALE: 1:1  
 SHEET: 1/1  
 UNIT: MM  
 DRAW NO.:  
 REV: A