


MICRO COAX Cable with IPEX Cabline CAII

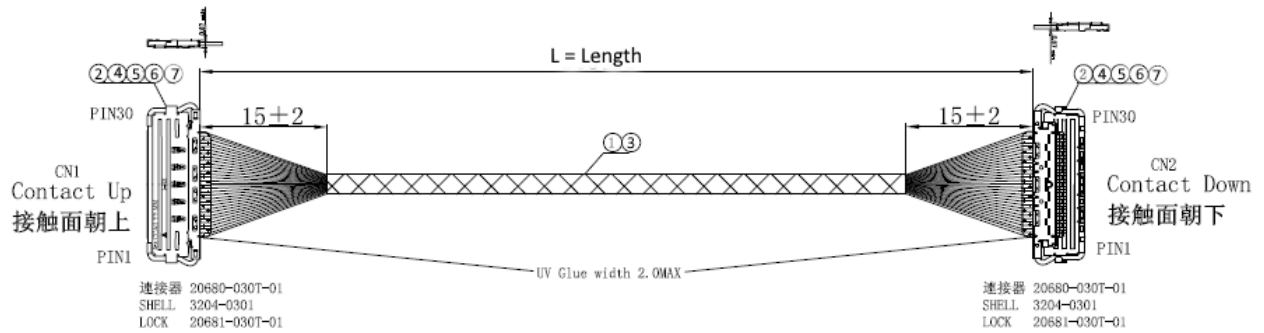

Drawing (only for reference) shows partial round binding with acetate cloth tape

1 wire – micro coax	AWG 42/ 50Ω green UL11130
2 connector IpeX Cabline CAII – 0.4 pitch / (20-60 Pos.)	Plug: 20680-0xxT-01; Shell: 3204-0xx1; Lock 20681-0xxT-01 / (Receptacle 20682-0xxE-02)
4 Kapton	Kapton
3 Binding	Round binding with acetate cloth - E304309
5 Ground Bar	WG/B-002DA
6 UV Glue	HD1232
7 Laser marking	Aix CAII YY.MM
Transfer rate	20Gbps
Operation temperature / rated voltage	-35°C - +85°C / 30V

All materials are RoHS / REACH compliant with UL File numbers from ISO certified suppliers



How to Order

CCAII – nn – LLL – ii – B	C C=Connection 1=Connection 1:1 N=Connection 1:N X-000N customer specific
	B=Binding 0=(null) w/o Binding R=Round with Acetate Cloth F=Flat with Acetate Cloth S=Spiral L=Laminated
	ii=Impedance e.g. 50Ω
	LLL=Length in mm optional
	nn=No. of Position
CCAII=Series Name: IPEX Cabline CAII	

For Example: CCAII-50-300-50-R1

MICRO COAX Cable with IPEX Cabline CAll

Prefer to work with excel? Click [HERE](#)

- (a) Use Supplier Pin Count
 (b) Choose: MC = Micro Coaxial **or** TC = Twin Coaxial **or** DW = Discrete Wire
 (c) Depending on Connector Specification – make sure wires of the same type are together

Total Length [mm]:			Quantity:	
Connector 1			Connector 2	
Any Partnumber:			Any Partnumber:	

Pin (a)	Wire type (b)	AWG (c)	Impedance in Ohm	Pin
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				

MICRO COAX Cable with IPEX Cabline CAlI

34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				

Fill out and send to anfrage@electronaix.com