
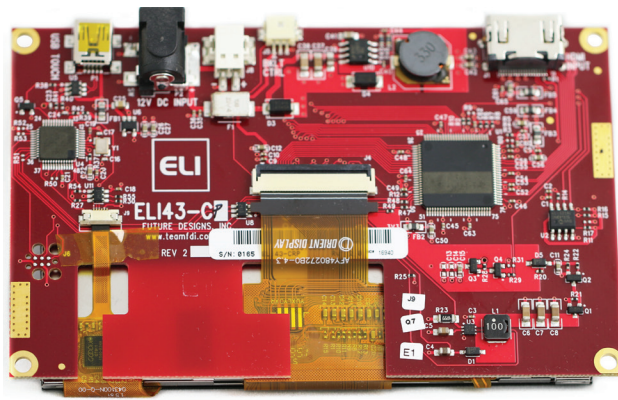


FDI

ELI

TM

4.3" PCAP Touchscreen LCD Module for SBCs

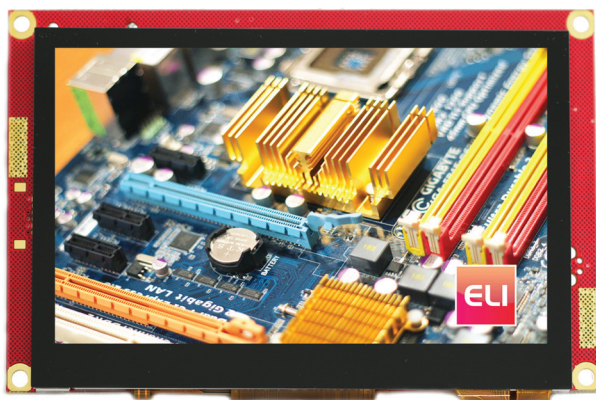

Compatible
With:



ELI43-CP

- **PCAP Commercial Version**
- **4.3" WQVGA LCD Panel with LED Backlight**
- **MSRP (Qty Volume): <\$105.00**
- **MSRP (Qty 1):\$121.00**

Features

- 4.3" WQVGA LCD Panel with LED Backlight
- Projected Capacitive Touchscreen with USB Device Interface
- PCAP Commercial Version
- Plug and Play interface to standard SBCs
- HDMI or DVI Input
- 5 to 24 VDC Input Voltage ($\pm 5\%$ tolerance)
- 470 nits Brightness (typical)
- 500:1 Contrast Ratio (typical)
- EDID Support for Automatic Screen Sizing
- -20° to $+70^{\circ}$ C Operating Temperature Range
- Franchised Distribution Stocking
- Part Number: ELI43-CP

Available From:



AVNET



Specifications

- Screen Size (inches): 4.3 inches
- Touch Screen Type: PCAP
- Display Technology: TFT
- Touch Screen Interface: USB Device (25mA typ)
- Brightness (nits typ): 470
- Resolution: 480 x 272 (WQVGA)
- Contrast Ratio (typ): 500 : 1
- Aspect Ratio: Wide 16:9
- Colors: 16M (24 bit)
- Vertical Viewing Angle (U/D): 70/50°
- Horizontal Viewing Angle (L/R): 70/70°
- Surface Finish: Anti-glare
- Touch Panel Hardness: >7H
- Active Area (in mm) (WxH): 95.04 x 53.86
- Response Time (ms typ): 24
- Backlight (# LEDs): 10 (5S x 2P)
- Backlight Life (K hrs min): 20K (typ)
- Backlight Power Consumption (mW typ): 600
- EDID for Auto Screen Sizing: Yes
- Display Interface Input Mode: HDMI / DVI
- Input Voltage: +5.0 to +24.0 VDC ($\pm 5\%$ tolerance)
- Current Consumption ma typ/max: 180/275 @ 12V
- Power Consumption W typ/max: 2.25/3.5
- USB Device Current Consumption mA Typ/Max: 50/100
- Backlight Power Consumption up to 43% of Total
- Operating Temperature: -20° to 70° C
- Storage Temperature: -30° to 80° C
- Mounting: #4 screw in 4 corners
- Plug & Play with Standard SBCs: Yes
- Size: 116.84 (W) x 72.26 (H) x 19.10 (D) mm
- Weight (grams typ): 106



www.teamfdi.com
(256) 883-1240



@TeamFDI
#TeamFDI



[YouTube.com/
FDIProducts](https://www.youtube.com/TeamFDI)

Rev 1.13 - 06/22/2021