
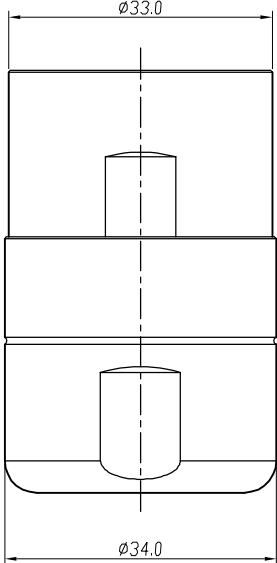

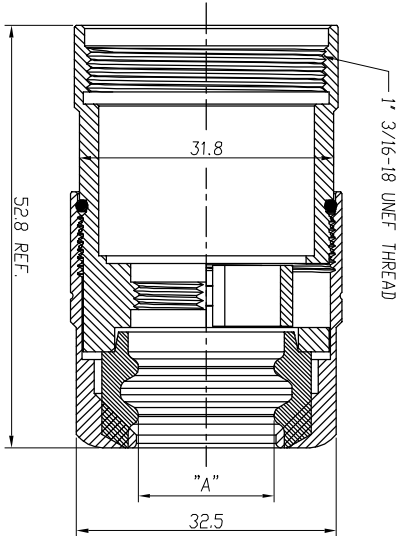


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
B1	-	RELEASE NEW DWG FORMAT	15-Dec-2014	Drack	Tommy
B2	-	Modify rubber material	13-May-2016	Ben	Tommy



NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
NUT: ZINC DIE CAST OR AL ALLOY, NICKEL PLATED.
O-RING: NBR.
SEAL: EPDM.
HOUSING BODY: ZINC DIE CAST OR AL ALLOY, NICKEL PLATED
- SPECIFICATIONS:
2.1 DEGREE OF PROTECTION: IP67 (MATED CONDITION)
2.2 RoHS COMPLIANT
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

	Dimension "A"	Cable OD Range
1	RTOL-20CPG-S1	Ø15.8mm 16.0-17.0 mm
2	RTOL-20CPG-S2	Ø20.0 mm 20.5-22.5 mm
3	RTOL-20CPG-S3	Ø13.0mm 13.5-15.0 mm
4	RTOL-20CPG-S5	Ø13.0 mm 13.5-14.0 mm
5	RTOL-20CPG-S6	Ø15.8 mm 16.0-21.0 mm
6	RTOL-20CPG-S8	Ø13.0 mm 11.0-15.0 mm

SEE PART NUMBER CHART		DESCRIPTION		TITLE	
QUANTITY	PART NUMBER	MATERIALS LIST		REV	
UNLESS OTHERWISE SPECIFIED		1) All dimensions are in metric(mm).			
2) Tolerances are as follows:		DRAWN: Drack			
3) Hole reference =		DATE: 5/EC/2014			
4) Hole reference =		CHECKED:			
5) Hole reference =		ENGINEER:			
6) Hole reference =		APPROVAL:			
MATERIAL SPECIFICATIONS:		CUSTOMER:			
PROCESS SPECIFICATIONS:		THIS DRAWING IS SPECIFIED FOR:			
NEXT ASBY:		SPECIFICATIONS AND PERFORMANCE DATA:			
		SHOWN HEREIN ARE THE PROPORTIONS OF:			
		OR REPRODUCTION ARE SUBJECT TO NORMAL:			
		MANUFACTURING VARIATIONS:			
		ECO-MATE CORD GRIP SIZE 20			
		Amphenol			
		Site Systems - www.amphenol-site.com			
		44724 Morley Drive			
		Clinton Township, MI 48038			
		SCALE: NONE			
		B C- RTOL-20CPG-Sx B2			
		1 OF 1			