

Specifications

UL Electrical Ratings	Evaluated to UL 1054 5A @ 125VAC / 250VAC; resistive, T120, 6K cycles
Electrical Life	100,000 cycles typical

Mechanical Life	10,000,000 cycles typical
Contact Resistance	<20mΩ initial
Actuation Forces	80gF, 130gF, 350gF
Dielectric Strength	1000Vrms min @ sea level
Insulation Resistance	≥100MΩ min.
Operating Temperature	-40°C to +120°C
Storage Temperature	-40°C to +120°C

Materials

Base / Cover	Polybutylene Terephthalate (PBT), UL94-V0
Pin Plunger	Polybutylene Terephthalate (PBT), UL94-V0
Contacts	Silver Alloy
Terminals	Copper Alloy, Silver Plated



Ordering Information

1. Series	SM3	A	Q	F130	1	L00
SM3						
2. Circuit						
A = SPST N.O.						
B = SPST N.C.						
C = SPDT						
3. Contact Material						
Q = Silver						
4. Operating Force without lever **Contact factory for other force options						
F080 = 80gF						
F130 = 130gF						
F350 = 350gF						
5. Termination						
1 = .110" Quick Connect						
2 = Solder Lug						
3 = PC Terminal						
4 = Right Angle PC Terminal						
5 = Left Angle PC Terminal						
6. Actuator (Lever)						
L00 = Pin plunger						
L01 = Hinge lever, standard						
L02 = Simulated roller						
L03 - Roller lever, short						
L04 = Hinge lever, long						


SM3

Snap Action

Dimensions

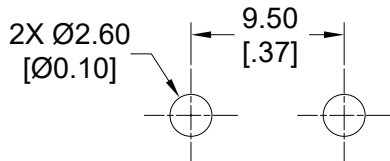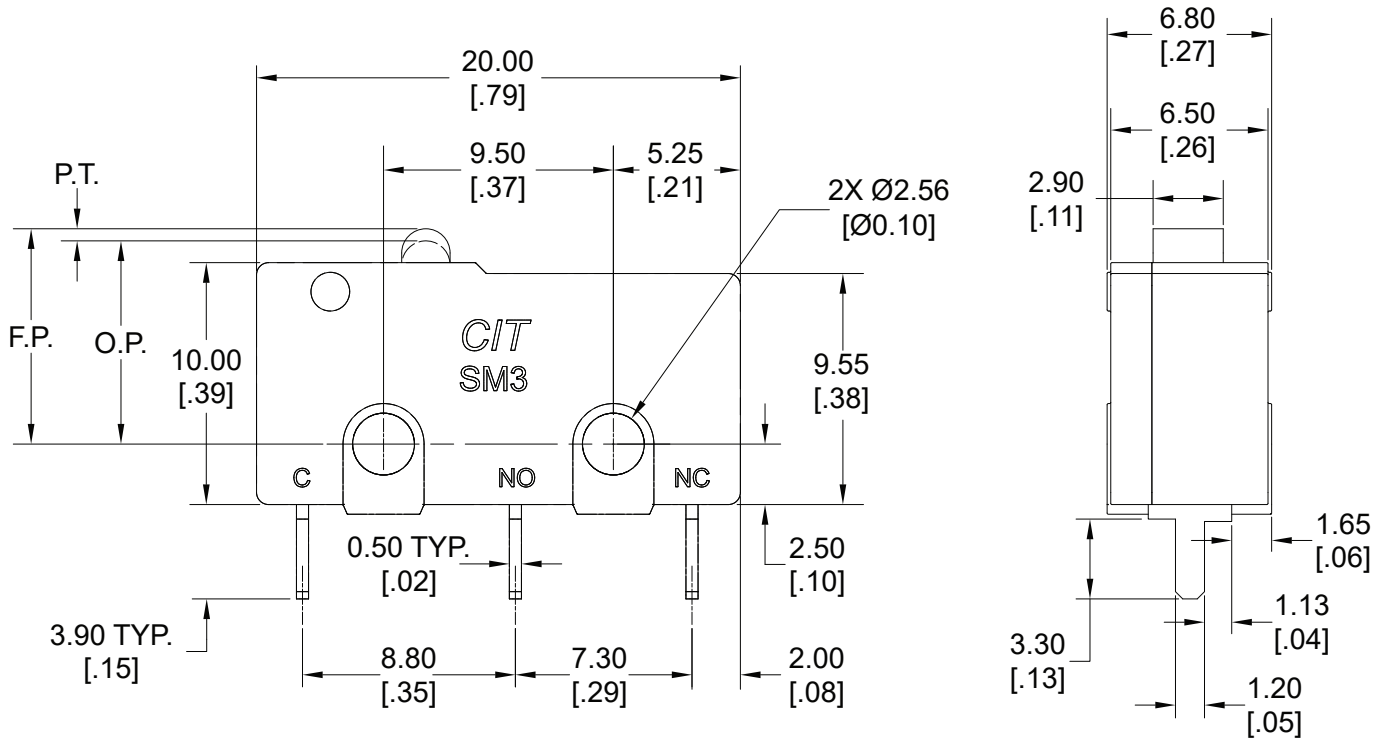

Panel Mounting




Schematic


Switch Characteristics

Actuators (Levers)	Operating Force - OF (grams)			Release Force - RF (grams)			Free Position (FP) all forces max (mm)	Pre-Travel (PT) all forces max (mm)	Operating Position (OP) all forces (mm)	Over Travel (OT) (mm)	*Movement Differential (MD) all forces max (mm)
	80gF	130gF	350gF	80gF	130gF	350gF					
L00	80+20/-30	130±30	350+30/-100	30~80	60~130	150~320	9.2	0.9	8.3±0.3	0.5	0.4
L01	20±10	30±15	80±30	5 min	10~30	25~75	12.2	3.0	9.6±0.8	1.0	1.0
L02	20±10	30±15	80±30	5 min	10~35	25~75	15.1	3.5	11.85±1.2	1.2	1.0
L03	18±8	30±15	70±25	5 min	10~35	30~80	19.15	3.0	14.4±1.0	1.0	0.8
L04	12±5	15±8	45±25	5 max	5~25	20~50	15.8	3.8	12 min	1.8	2.0


*Movement Differential (MD) : Distance or angle from the operating position to the release position.




Terminal Options

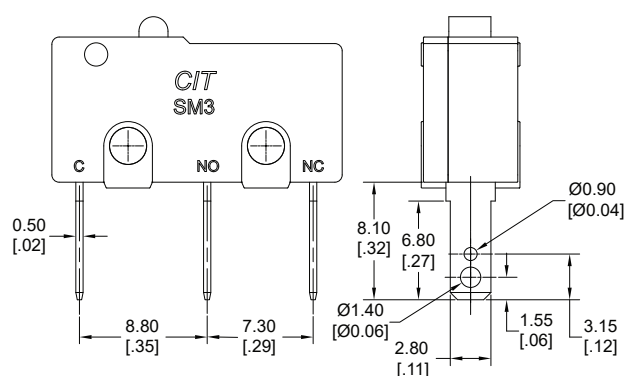



.110" Quick Connect Terminals

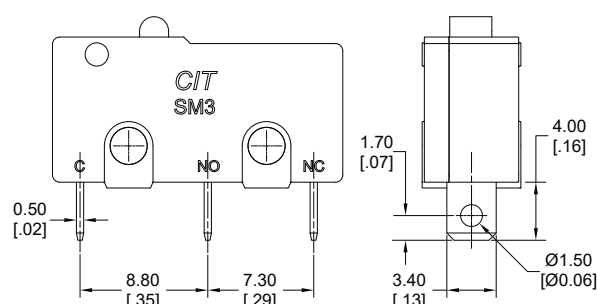



Solder Lug

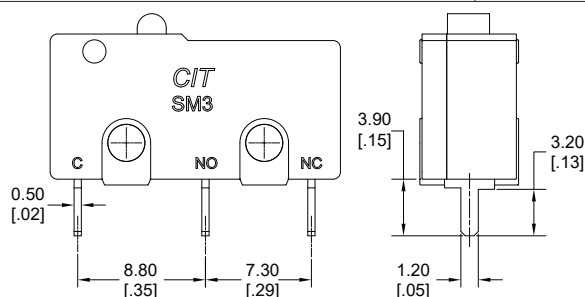


PC Terminals

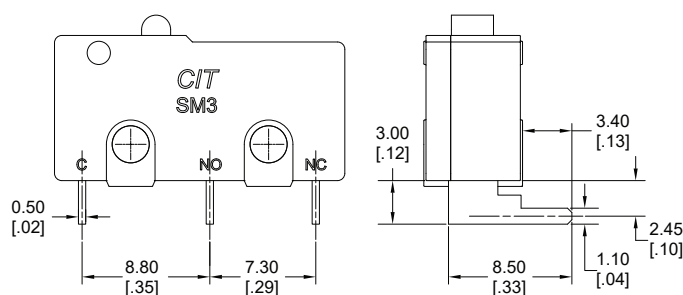

Right Angle PC Terminals

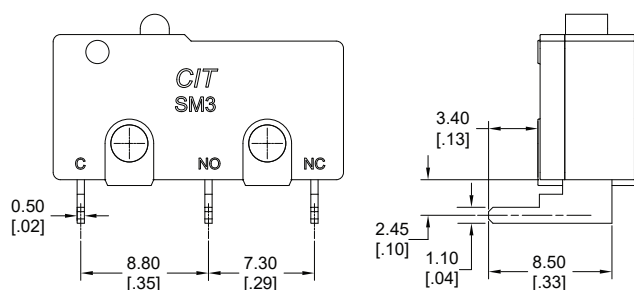



Left Angle PC Terminals




SM3

Snap Action


Levers





L00





L01



L02

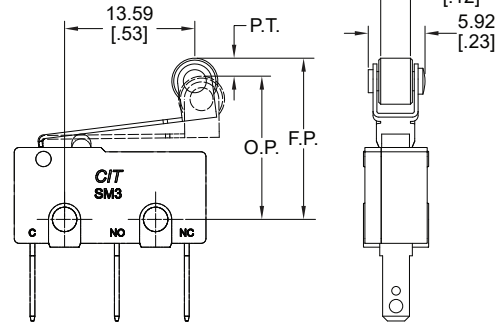

L03

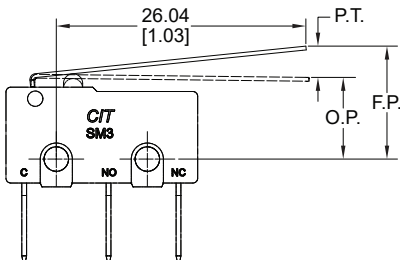

L04