
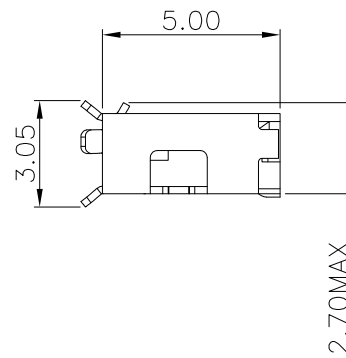
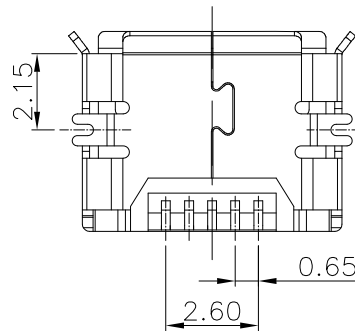
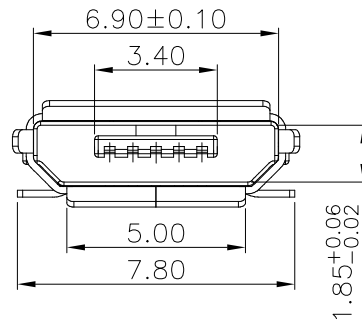


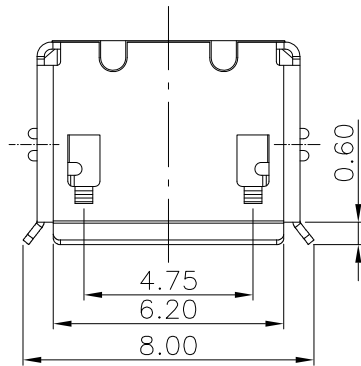

Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:20m Ohm Max

Insulation Resistance:1,000M Ohm Min

Withstanding Voltage:750V AC/Minute

Temperature Range:-40°C ~ +105°C

Materials and Finish:


Insulator:LCP(UL94V-0)

Insulator Color:Black


Contact:Brass


Plating:30u" Gold Plated on Contact Area,Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated

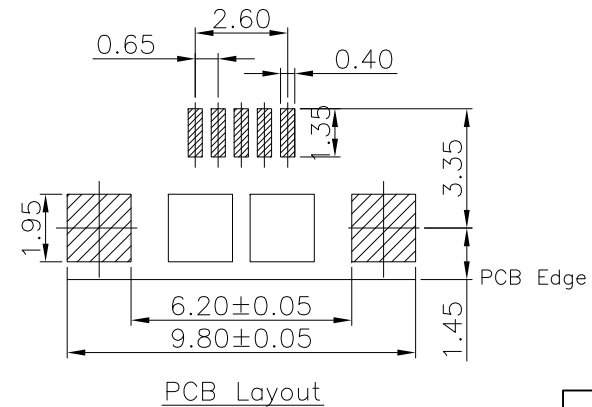

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	CnC Tech Industrial Cable and Connector Technology		D
				CHECKED:	UNIT: MM	DESCRIPTION: Micro USB B Socket 5Pin SMD Type, 30u"	SIZE A4	
					SCALE:1:1			
				APPROVAL:	SHEET: 1 / 2	PART NO: 1002-005-12100-TR		
					PROJECTION: 			
REV	DATE	FILE	BY					

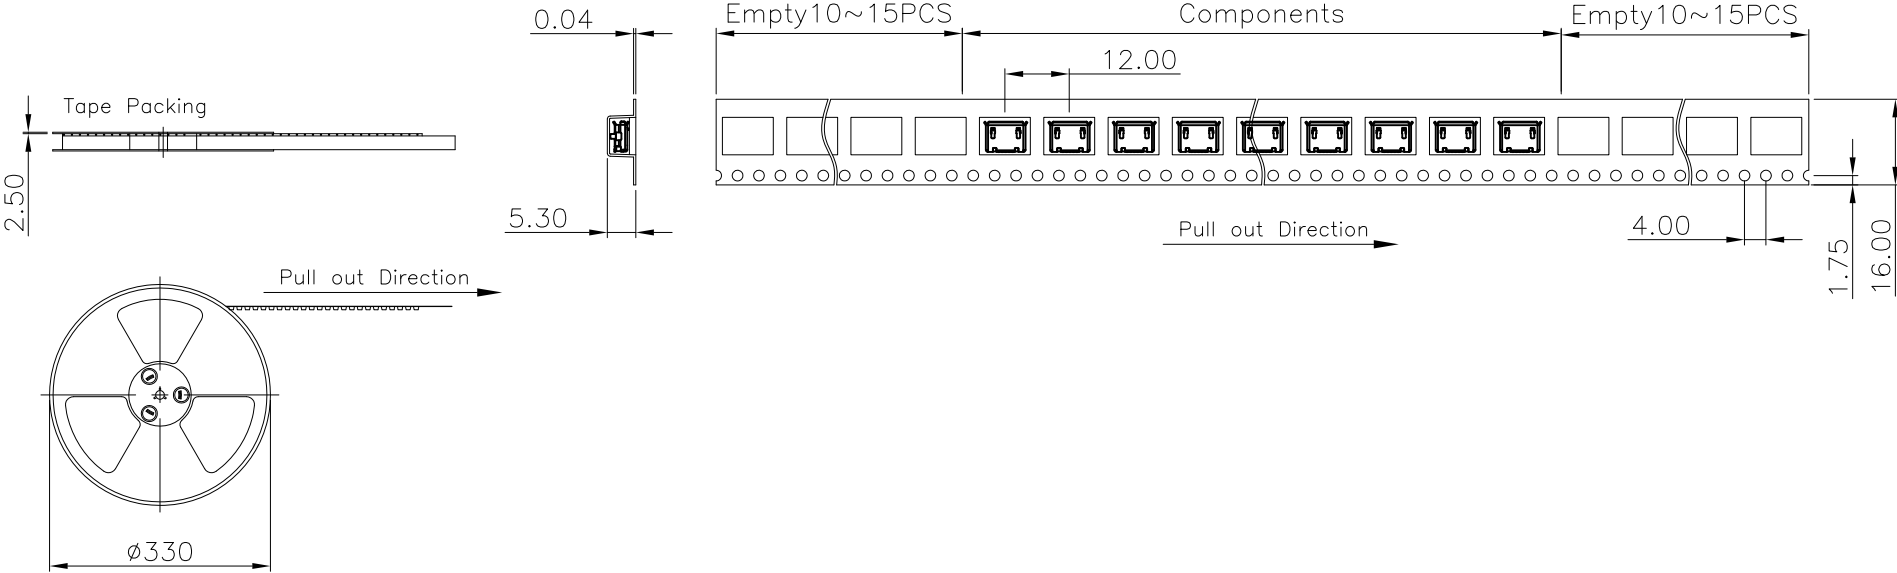

Note:

- 1.All dimensions meet EIA-481-B Requirements.
- 2.Material:Black Polystyrene
- 3.Thickness:0.40±0.05mm
- 4.Component load per 13" reel :1000 pcs.
- 5.Carton Size:350*350*296(mm)

Pin No	PCS/R	R/CTN	Q'TY
05	1000	10	10000

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	CnC Tech Industrial Cable and Connector Technology		SIZE	D
				APPROVAL:	SCALE:1:1	PART NO: 1002-005-12100-TR			
					SHEET: 2 / 2				
REV	DATE	FILE	BY		PROJECTION:			A4	