

# Data sheet

## 28771.4 KDS-RGA M20 BK



Thread and locking adapter, Material: Polyamide PA 6.6, glass-fibre reinforced, Colour: Black

RAL: 9005

### Business data

|                                            |                |
|--------------------------------------------|----------------|
| Article number                             | 28771.4        |
| Article name                               | KDS-RGA M20 BK |
| GTIN (EAN)                                 | 4044211234515  |
| Colour                                     | Black          |
| Packaging unit                             | 5              |
| Quantity unit                              | PC             |
| Weight per piece (not including packaging) | 7.2 g          |
| Weight per piece (including packaging)     | 8 g            |
| Unit of weight                             | G              |
| Customs number                             | 39259020       |
| Country of origin                          | DE             |
| Product description                        | Cable Entry    |

### Technical data

#### Dimensions

|                       |         |
|-----------------------|---------|
| Length                | 38 mm   |
| Length of wall cutout | 20.3 mm |
| Width                 | 38 mm   |
| Width of wall cutout  | 20.3 mm |
| Height                | 22.1 mm |
| Installation height   | 14.9 mm |

#### Thread

|                   |         |
|-------------------|---------|
| Thread type       | Metric  |
| Thread size       | 20 mm   |
| Thread pitch      | 1.5 mm  |
| Thread length (L) | 14.9 mm |

#### Materials

|                           |               |
|---------------------------|---------------|
| Material                  | Polyamide 6.6 |
| Glass-fibre reinforced    | ✓             |
| Flammability class UL 94  | V-0           |
| Working temperature, min. | -40 °C        |
| Working temperature, max. | 120 °C        |
| Halogen-free              | ✓             |
| Silicone-free             | ✓             |

#### Further technical data

|                        |                             |
|------------------------|-----------------------------|
| Mounting type          | Screws                      |
| Degree of protection   | IP66                        |
| NEMA Type              | 1, 12, 4x (indoor use only) |
| Torque for the locknut | 3 Nm                        |

#### Environmental Product Compliance

|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2022-01-07 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

Approvals


UL Recognized

|                |         |
|----------------|---------|
| UL File Number | E489821 |
| UL approval    | UL 508A |
| UL Recognized  | yes     |

cUL Recognized

|                 |                 |
|-----------------|-----------------|
| cUL approval    | C22.2 No. 14-18 |
| cUL File Number | E489821         |
| cUL Recognized  | yes             |

Media

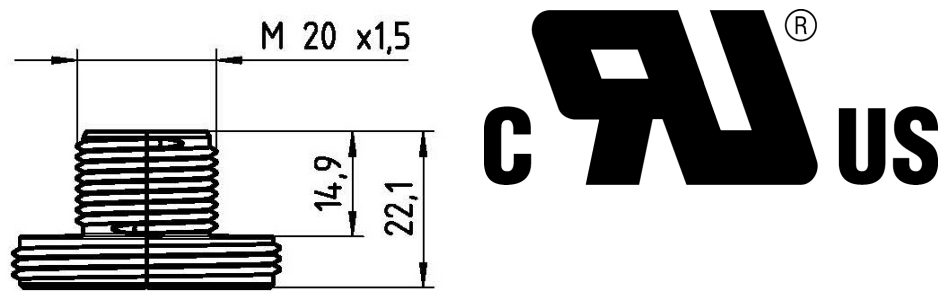

# Data sheet

## 28771.4 KDS-RGA M20 BK




### Accessories

#### Small Seals

#### Separable locknut

#### ##INVERSE##CONTA-CABLE



Round cable entry, Material: polyamide PA 6.6, glass-fibre reinforced | TPE, Colour: Black

| Article number          | Article name   | GTIN (EAN)    | Packaging unit |
|-------------------------|----------------|---------------|----------------|
| <a href="#">28770.4</a> | KDS-R 20-32 BK | 4044211234508 | 5 ST           |

#### Sheet-metal puncher