



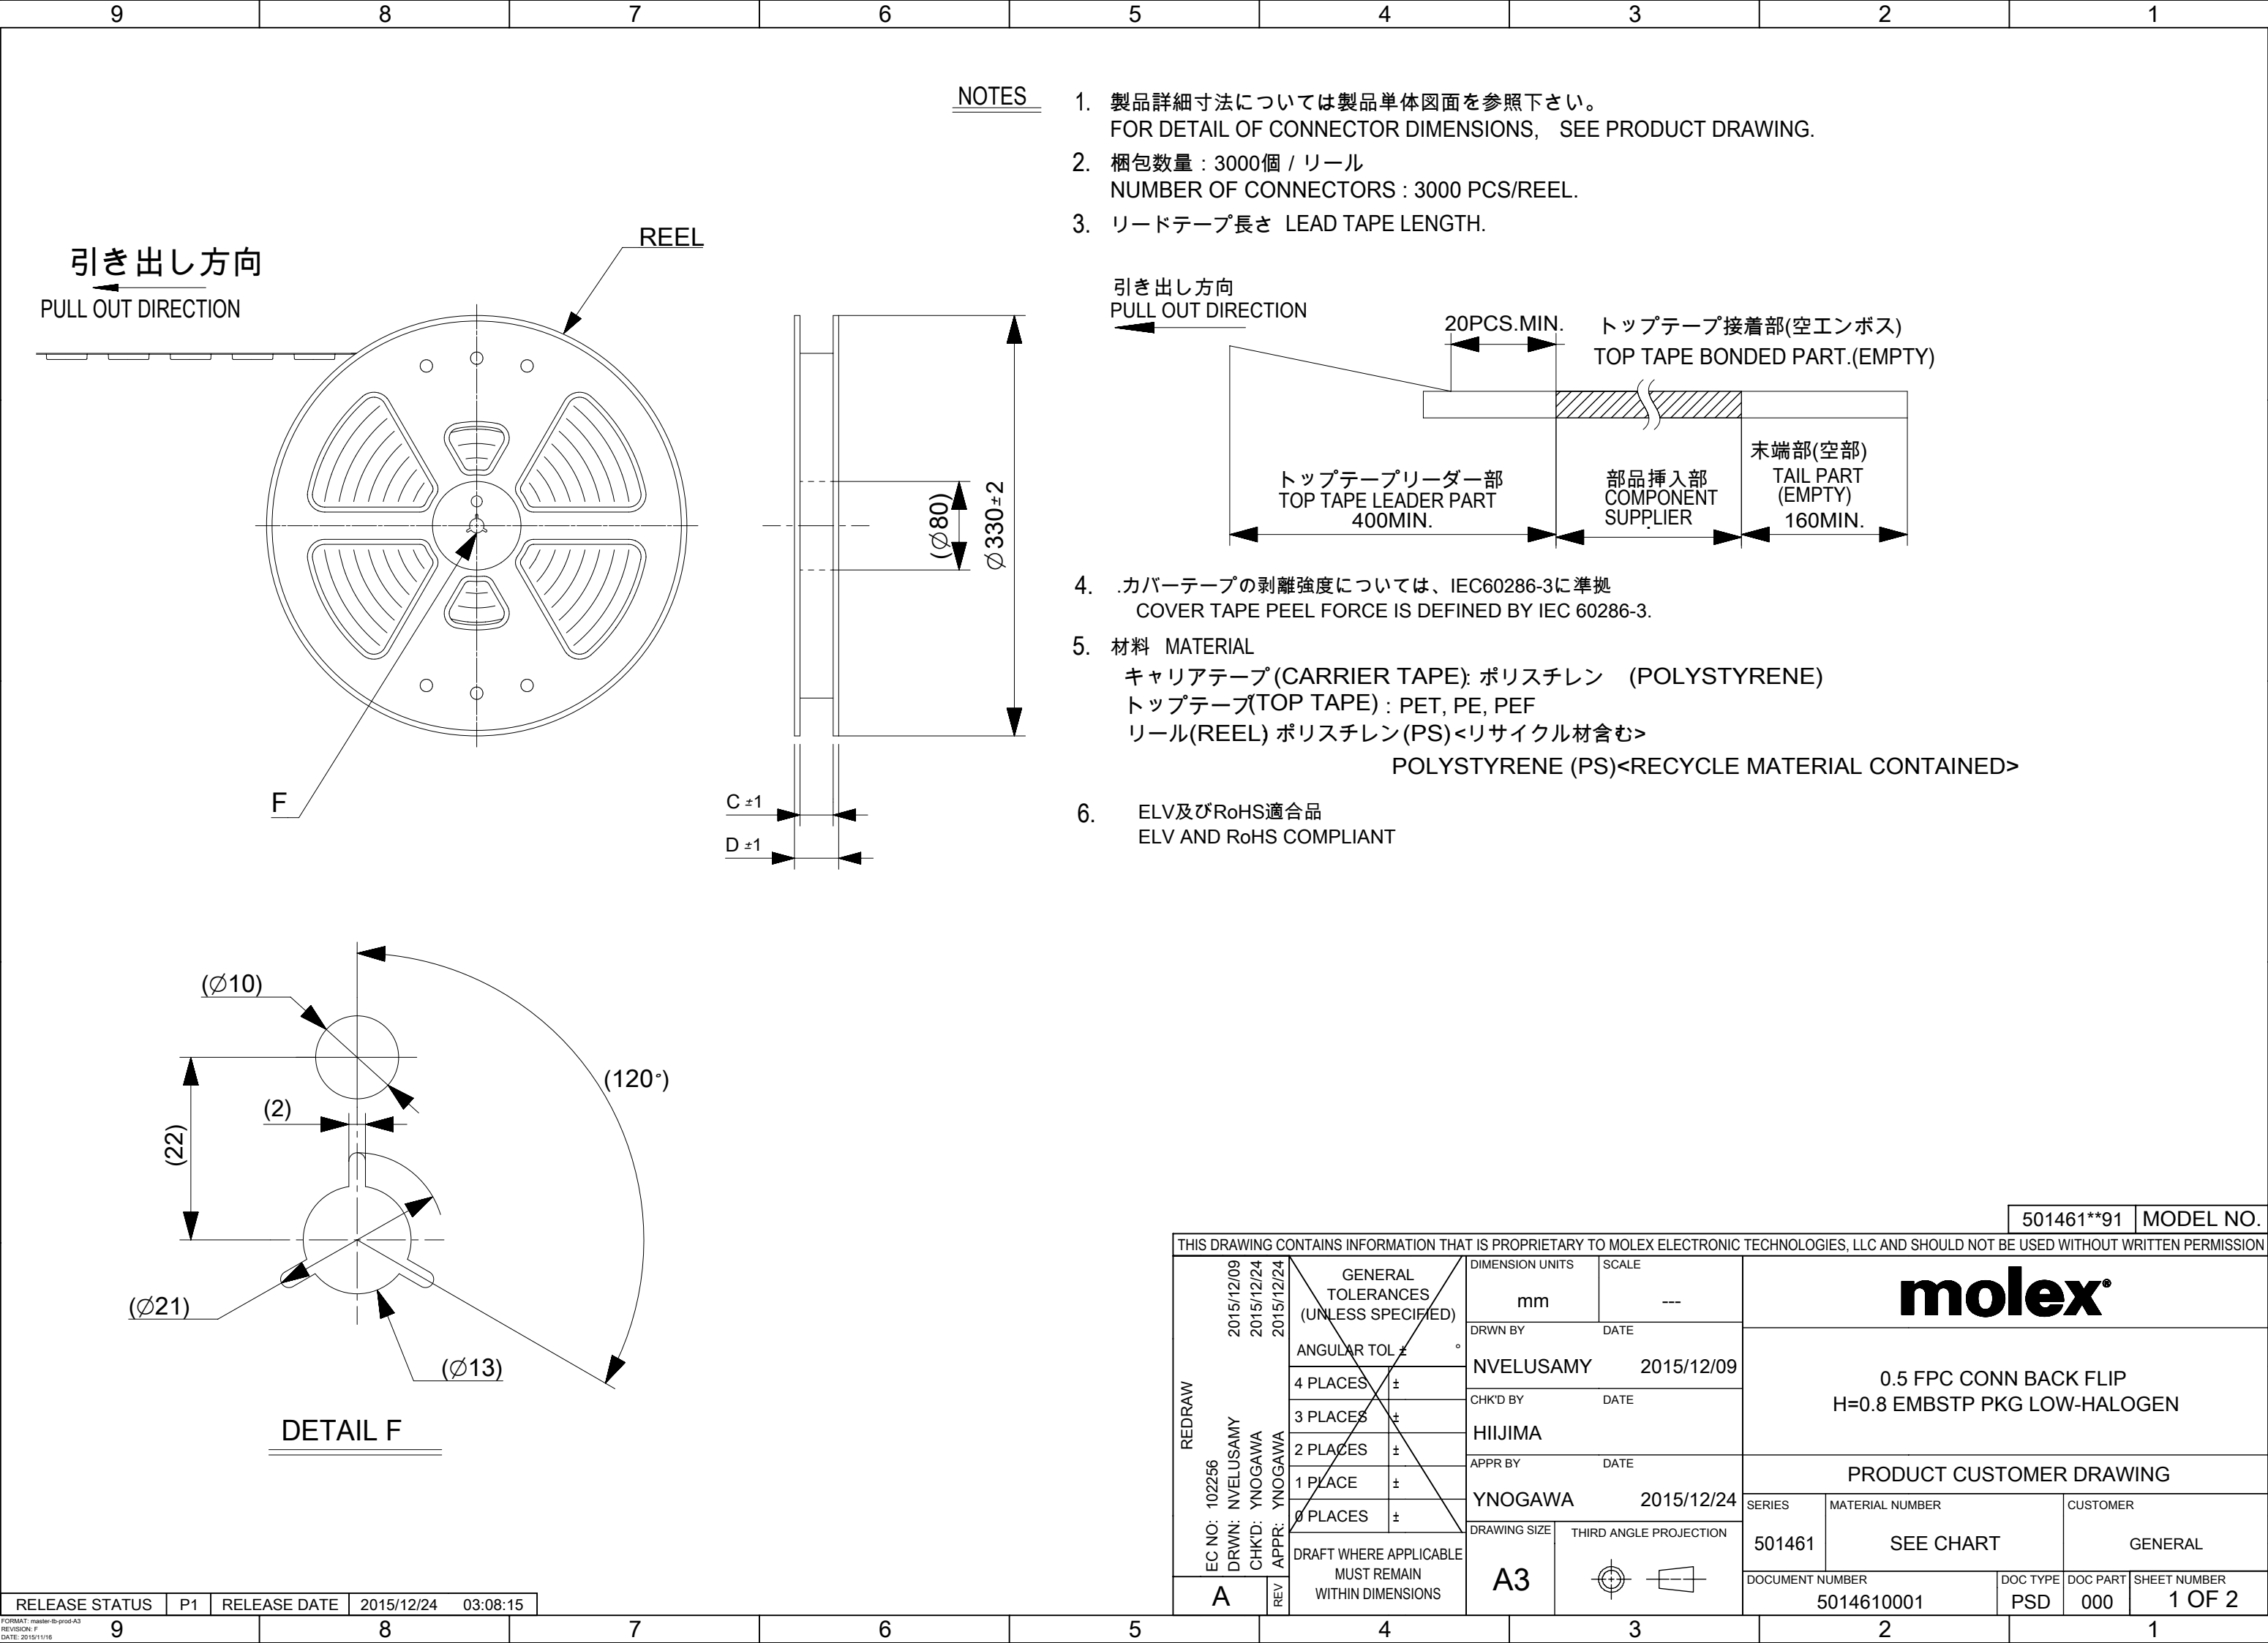

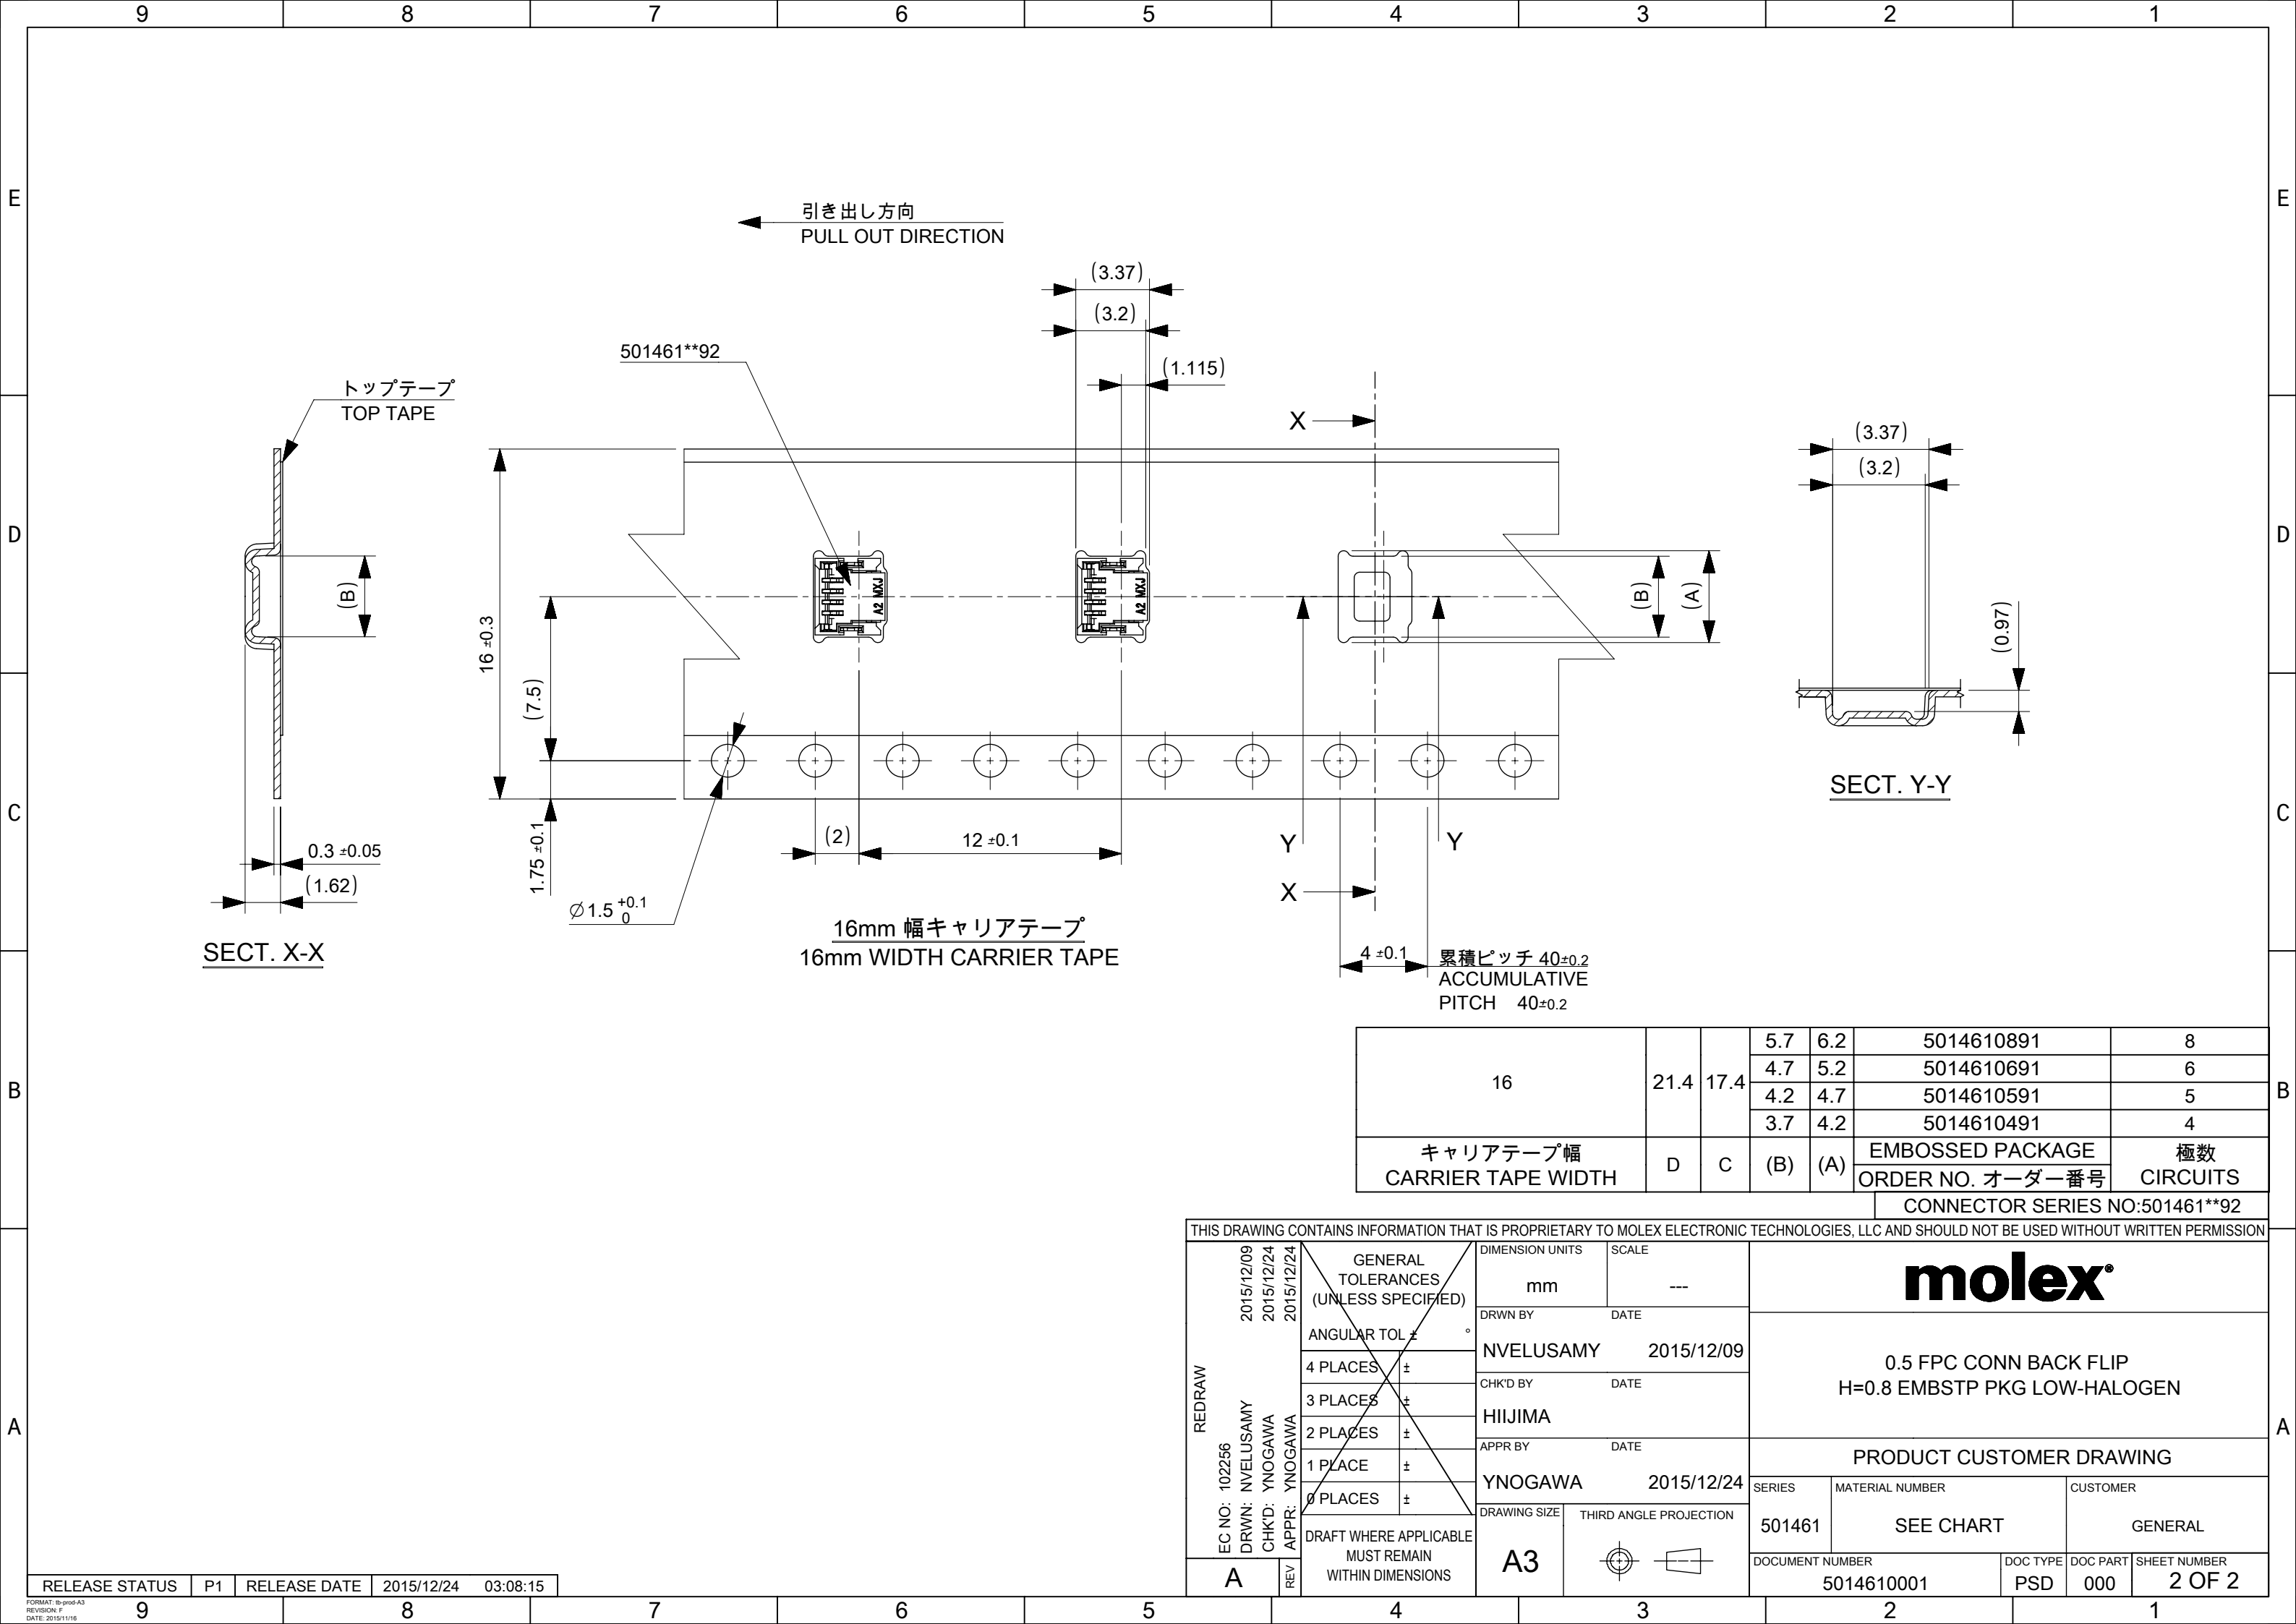


SECT. X-X

SECT. Y-Y

16mm 幅キャリアテープ
16mm WIDTH CARRIER TAPE

16	21.4	17.4	5.7	6.2	5014610891	8
			4.7	5.2	5014610691	6
			4.2	4.7	5014610591	5
			3.7	4.2	5014610491	4
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	(B)	(A)	EMBOSSED PACKAGE	極数 CIRCUITS
					ORDER NO. オーダー番号	
					CONNECTOR SERIES NO:501461**92	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
REDRAW	EC NO: 102256 DRWN: NVELUSAMY CHK'D: YNOGAWA APPR: YNOGAWA	2015/12/09 2015/12/24 2015/12/24	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	DIMENSION UNITS		SCALE		molex®								
				mm		---										
				DRWN BY		DATE		0.5 FPC CONN BACK FLIP H=0.8 EMBSTP PKG LOW-HALOGEN								
				NVELUSAMY		2015/12/09										
				CHK'D BY		DATE		PRODUCT CUSTOMER DRAWING								
				HIIJIMA												
				APPR BY		DATE		SERIES					MATERIAL NUMBER		CUSTOMER	
				YNOGAWA		2015/12/24										
A	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWING SIZE		THIRD ANGLE PROJECTION		501461		SEE CHART		GENERAL					
			A3				DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER			
							5014610001		PSD		000		2 OF 2			

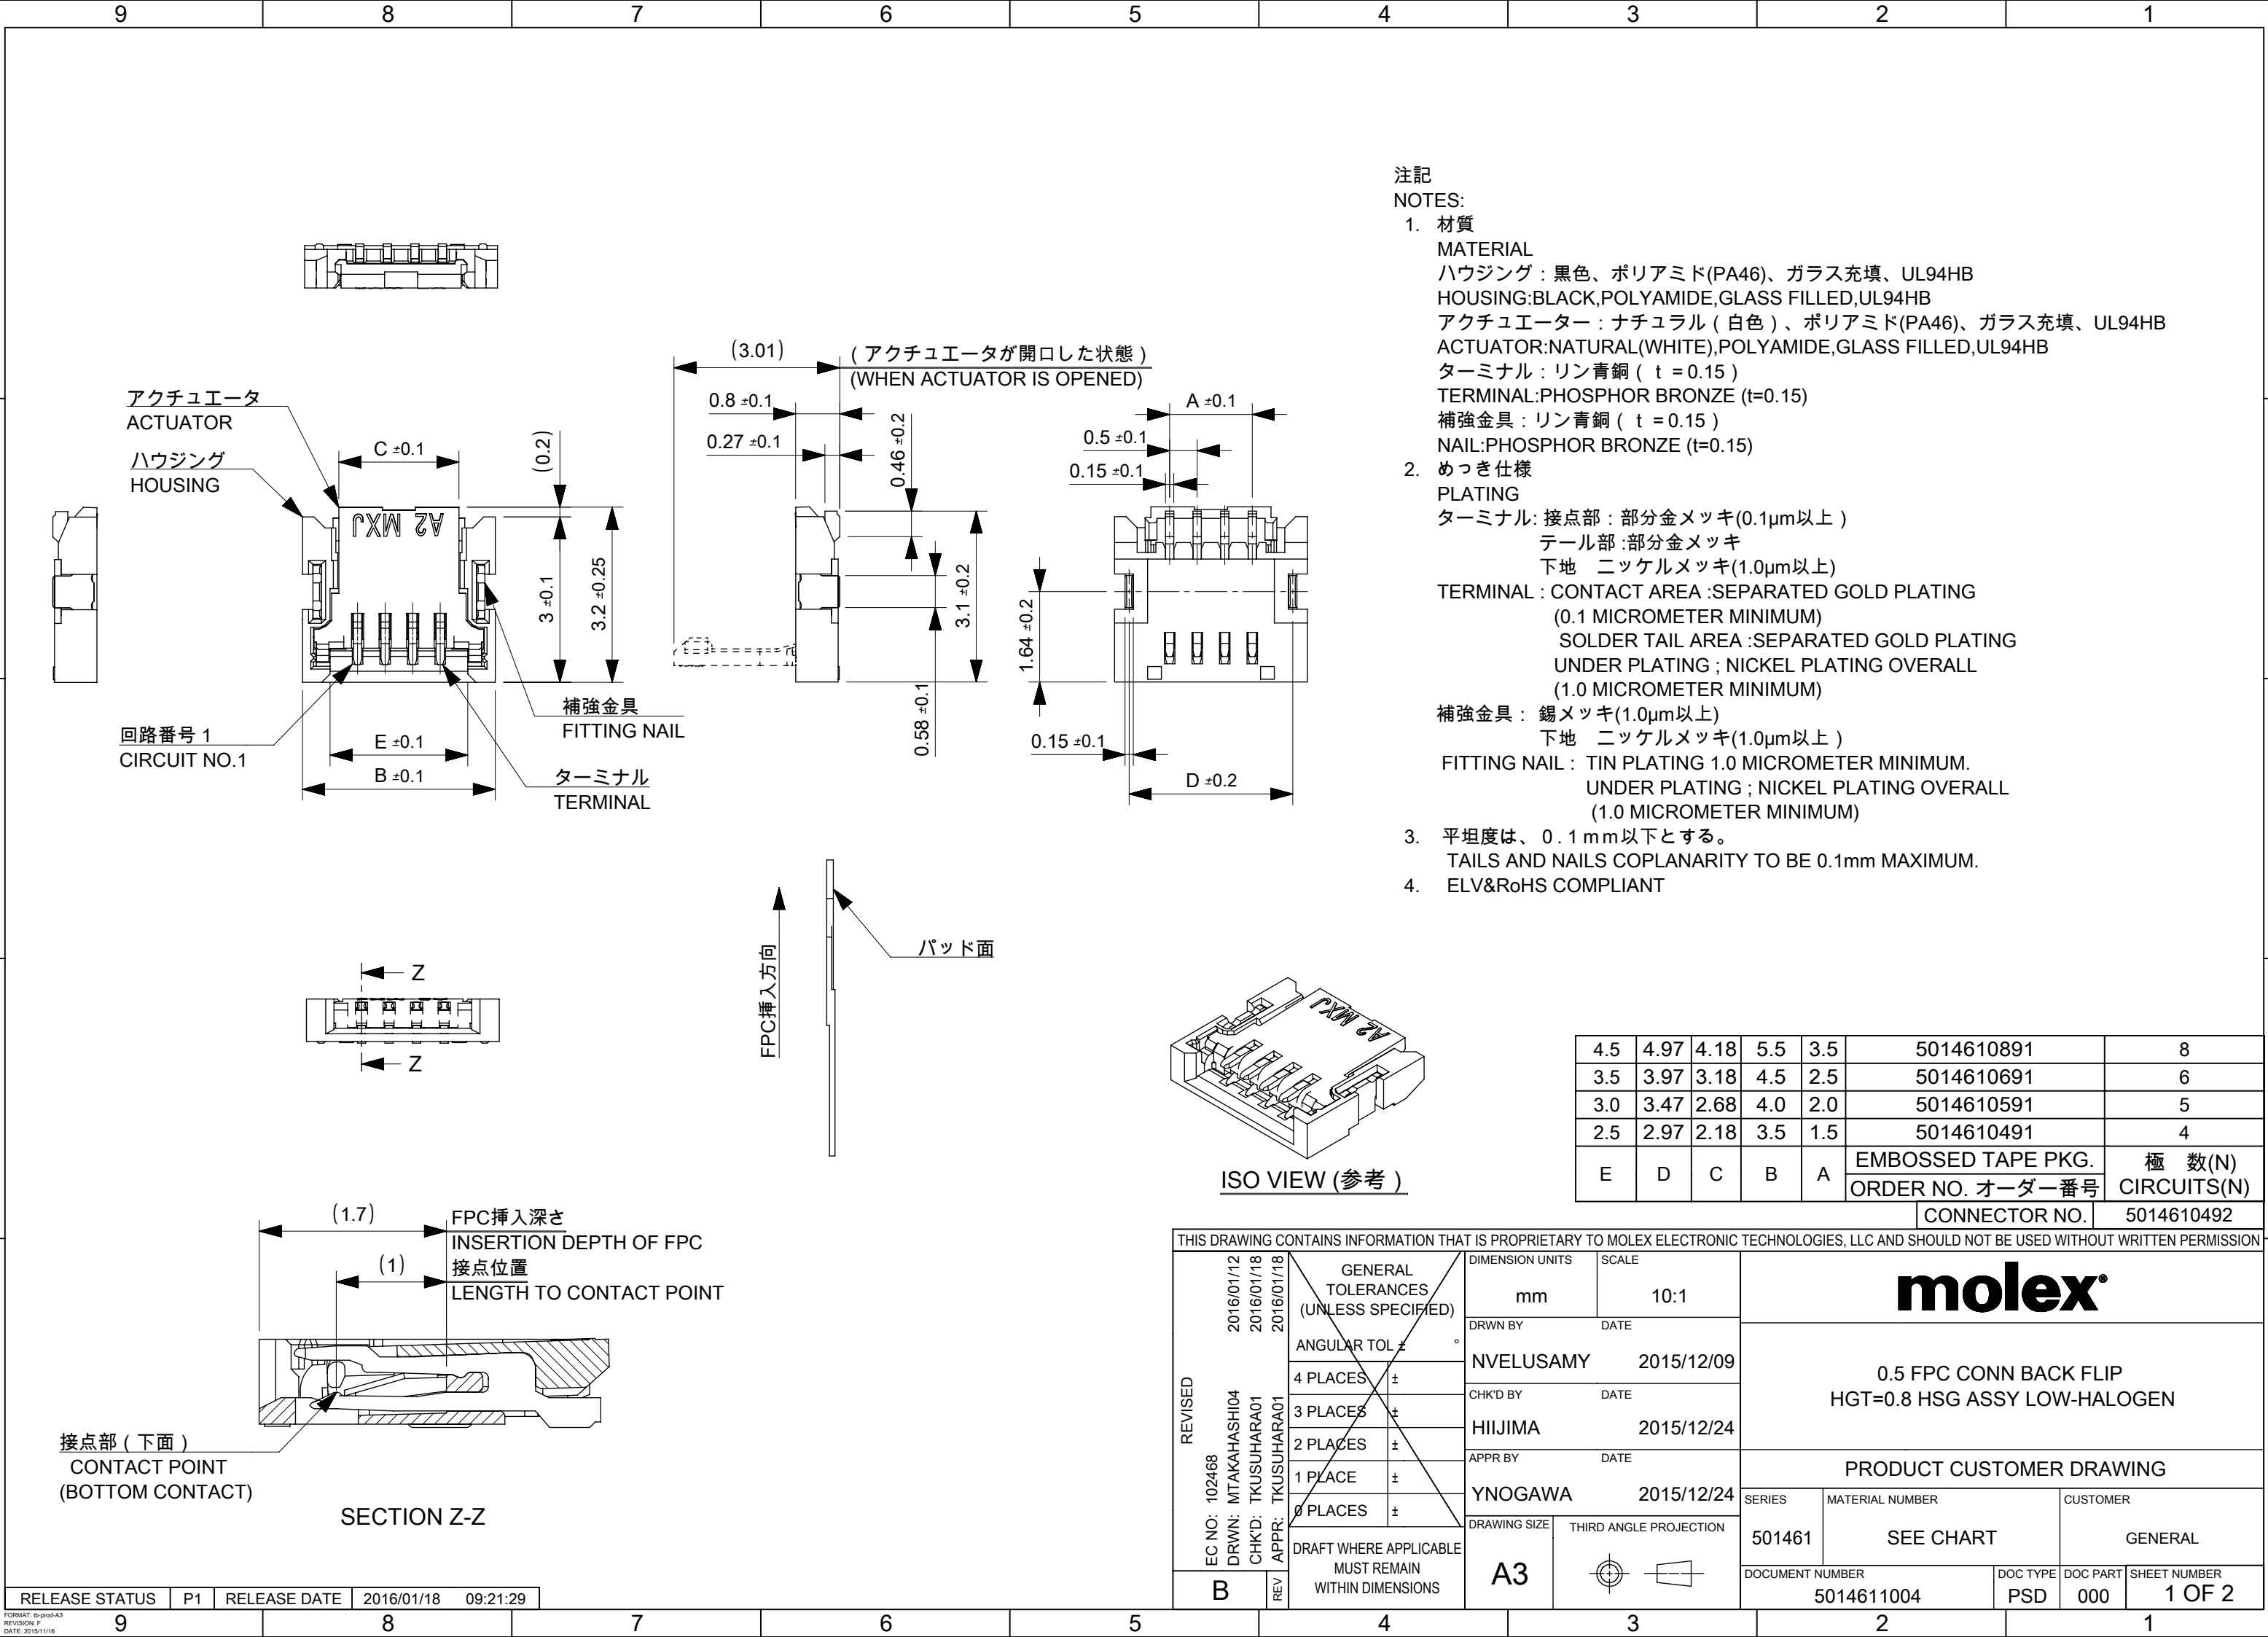

注記

NOTES:

1. 材質

MATERIAL

ハウジング：黒色、ポリアミド(PA46)、ガラス充填、UL94HB

HOUSING:BLACK,POLYAMIDE,GLASS FILLED,UL94HB

アクチュエーター：ナチュラル(白色)、ポリアミド(PA46)、ガラス充填、UL94HB

ACTUATOR:NATURAL(WHITE),POLYAMIDE,GLASS FILLED,UL94HB

ターミナル：リン青銅 (t = 0.15)

TERMINAL:PHOSPHOR BRONZE (t=0.15)

補強金具：リン青銅 (t = 0.15)

NAIL:PHOSPHOR BRONZE (t=0.15)

2. めっき仕様

PLATING

ターミナル: 接点部：部分金メッキ(0.1μm以上)

テール部：部分金メッキ

下地 ニッケルメッキ(1.0μm以上)

TERMINAL：CONTACT AREA：SEPARATED GOLD PLATING

(0.1 MICROMETER MINIMUM)

SOLDER TAIL AREA：SEPARATED GOLD PLATING

UNDER PLATING；NICKEL PLATING OVERALL

(1.0 MICROMETER MINIMUM)

補強金具： 錫メッキ(1.0μm以上)

下地 ニッケルメッキ(1.0μm以上)

FITTING NAIL：TIN PLATING 1.0 MICROMETER MINIMUM.

UNDER PLATING；NICKEL PLATING OVERALL

(1.0 MICROMETER MINIMUM)

3. 平坦度は、0.1mm以下とする。

TAILS AND NAILS COPLANARITY TO BE 0.1mm MAXIMUM.

4. ELV&RoHS COMPLIANT

4.5	4.97	4.18	5.5	3.5	5014610891	8
3.5	3.97	3.18	4.5	2.5	5014610691	6
3.0	3.47	2.68	4.0	2.0	5014610591	5
2.5	2.97	2.18	3.5	1.5	5014610491	4
E	D	C	B	A	EMBOSSED TAPE PKG.	極 数(N)
ORDER NO. オーダー番号					CIRCUITS(N)	
CONNECTOR NO.					5014610492	

ISO VIEW (参考)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
REVISED	EC NO: 102468	DRWN: MTAKAHASHIO4	CHK'D: TKUSUHARA01	APPR: TKUSUHARA01	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ± DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DIMENSION UNITS		SCALE		molex® 0.5 FPC CONN BACK FLIP HGT=0.8 HSG ASSY LOW-HALOGEN					
							mm		10:1							
							DRWN BY		DATE							
							NVELUSAMY		2015/12/09							
							CHK'D BY		DATE							
							HIIJIMA		2015/12/24		PRODUCT CUSTOMER DRAWING					
							APPR BY		DATE							
							YNOGAWA		2015/12/24		SERIES		MATERIAL NUMBER		CUSTOMER	
							DRAWING SIZE		THIRD ANGLE PROJECTION							
							A3				501461		SEE CHART		GENERAL	
DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER										
5014611004		PSD		000		1 OF 2										
B		REV														

