

6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A	510210800	PicoBlade1.25 Rec Hsg 8P		1	PC
B	500588000	PicoBlade1.25 Crimp Rec Term Chain Tin		8	PC
C	--	Blank label 12.7x35.5mm (WHT:12.7mm) HF		1	PC

2		1	
FROM	TO	DESCRIPTION	COLOR
A1	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A2	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A3	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A4	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A5	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A6	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A7	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A8	--	CABLE 28 AWG UL 1061 BLACK	BLACK


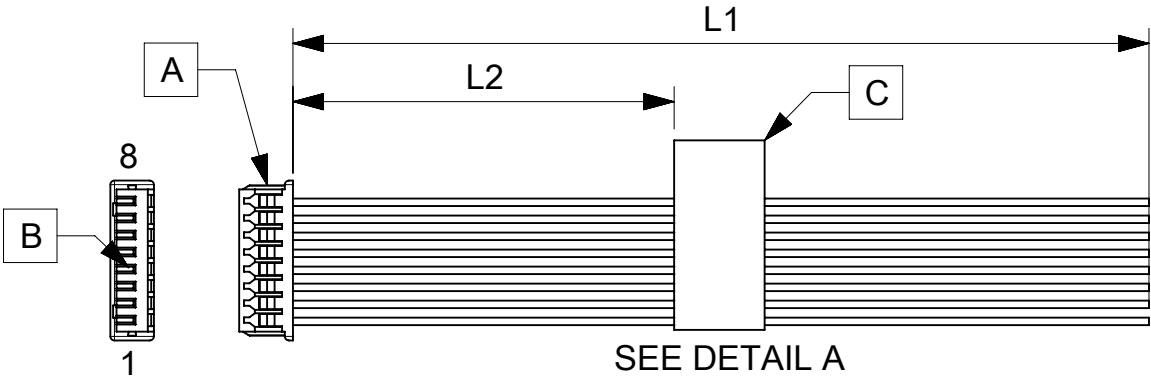


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2181120800	75±5	30	8 CIRCUIT PICOBLADE R:BLUNT CABLE 75MM
2181120801	150±6	70	8 CIRCUIT PICOBLADE P:BLUNT CABLE 150MM
2181120802	225±6	105	8 CIRCUIT PICOBLADE R:BLUNT CABLE 225MM
2181120803	300±8	145	8 CIRCUIT PICOBLADE R:BLUNT CABLE 300MM
2181120804	425±8	205	8 CIRCUIT PICOBLADE R:BLUNT CABLE 425MM



- NOTES
1. Connector view shown is from mating side.
 2. Free ends must be blunt cut.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in flag type on the cables.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
04/03/2021	A	INITIAL RELEASE	ARAJU
DOCUMENT STATUS	P1	RELEASE DATE	2021/03/26 04:03:45

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	DIMENSION UNITS	SCALE	CURRENT REV DESC:	
$\frac{F}{A} = 0$	mm	NTS		
$\frac{F}{C} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)			
$\frac{F}{P} = 0$	ANGULAR TOL ± °			
DIVISIONAL SYMBOLS	4 PLACES	±	EC NO: 659320	2021/03/04
	3 PLACES	±	DRWN: ARAJU	2021/03/26
	2 PLACES	±	CHK'D: RDESAI01	2021/03/26
	1 PLACE	±	APPR: RDESAI01	2021/03/26
	0 PLACES	±	INITIAL REVISION:	
			DRWN: ARAJU	2021/03/04
			APPR: RDESAI01	2021/03/26
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	SERIES
			A4-SIZE	218112
			MATERIAL NUMBER	CUSTOMER
			SEE TABLE	GENERAL MARKET
			SHEET NUMBER	1 OF 1