


NOTES:

1. MATERIALS AND FINISHES:
BODIES - STAINLESS STEEL, PASSIVATED
CONTACT - BeCu, GOLD PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: PACKAGING TO BE MARKED
"AMPHENOL RF, 925-201J-51S & DATE CODE"



THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	13-May-19	11464	EH

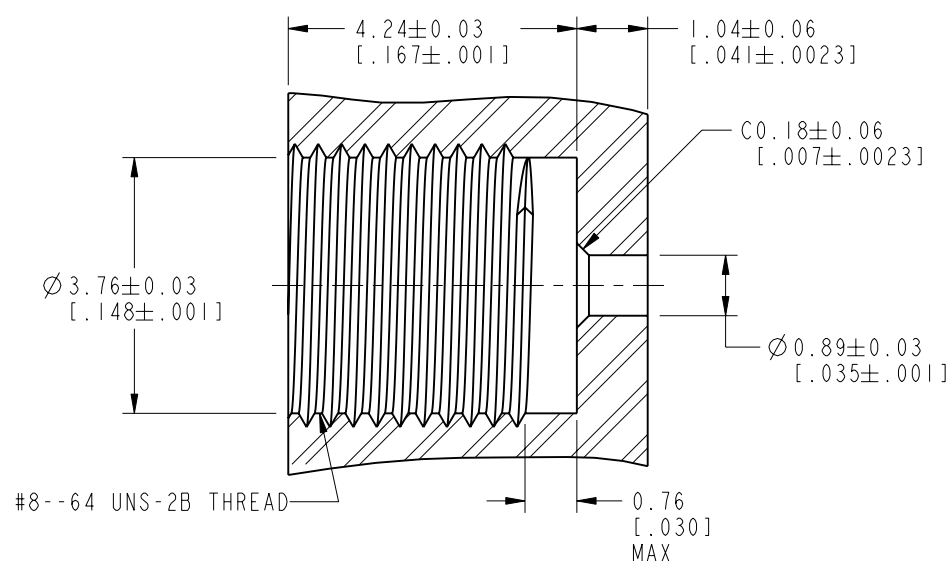

RECOMMENDED MOUNTING HOLE DIMENSIONS

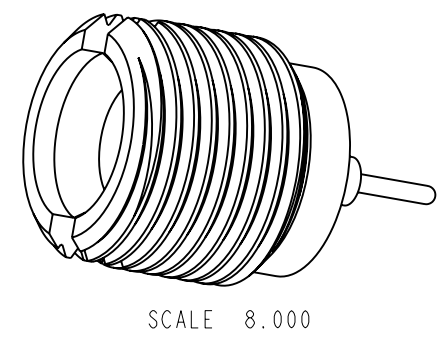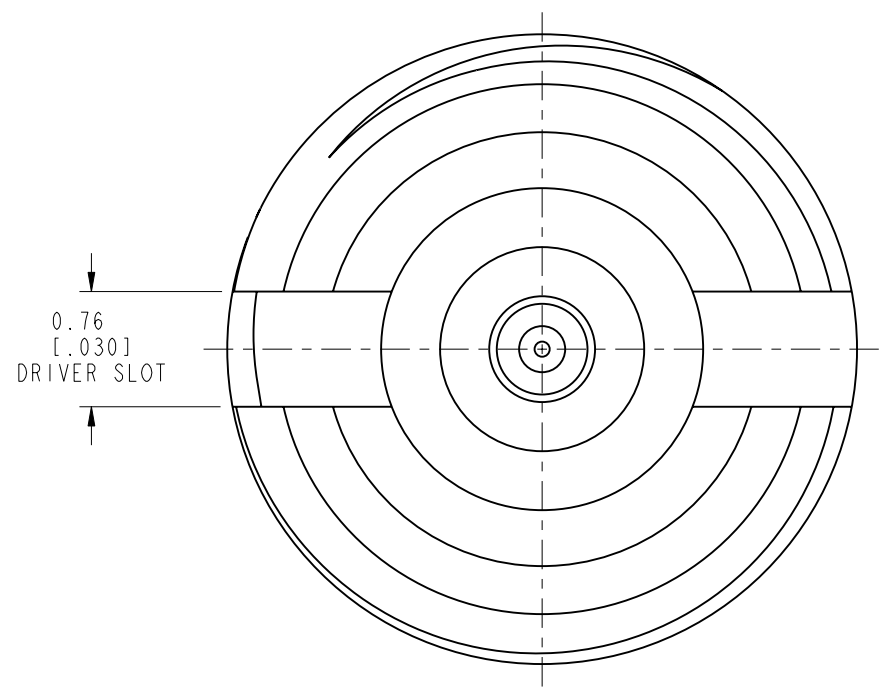

SCALE 8.000

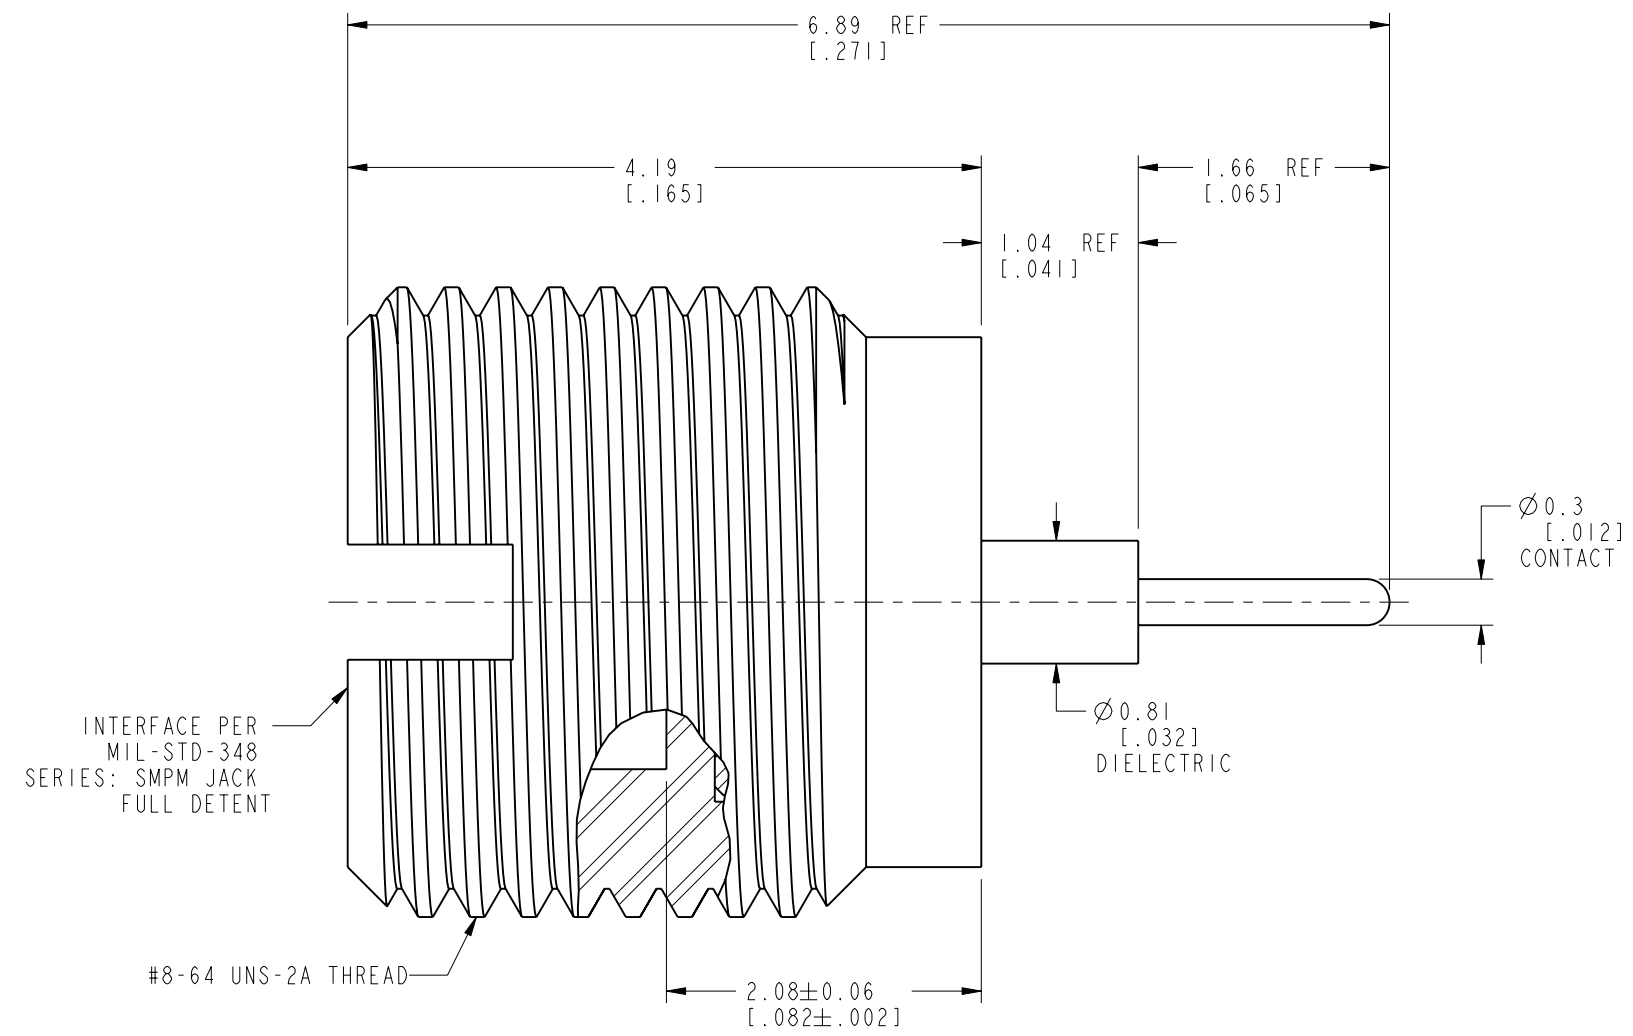

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL NOTE 1	DRAWN M. ZHANG	DATE 13-May-19	TITLE SMPM JACK FULL DETENT THREAD-IN		Amphenol RF www.amphenolrf.com	
	REFERENCE	ENGINEER E. HILL	DATE 01-Feb-19				
	EAR# 8895	APPROVED S.HSIEH	DATE 14-May-19				
	REF: 925-157J-51S	CAD FILE		SCALE: 20.0:1.0 SHEET 2 OF 2		DRAWING NO. 925-201J-51S	
	CONFIGURATION LEVEL: In Work			DWG SIZE B	REV A	ITEM NO. 925-201J-51S	
FINISH						PART NO. 925-201J-51S	