

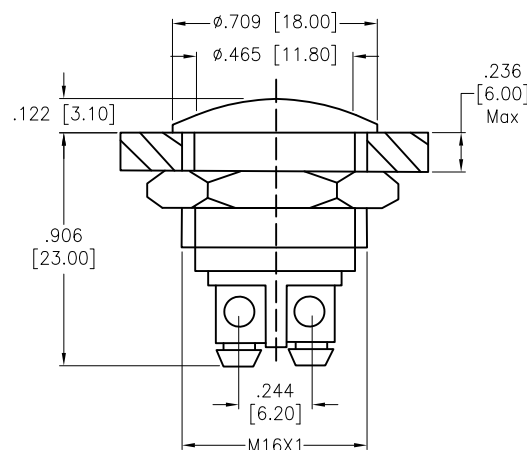


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/20/20	

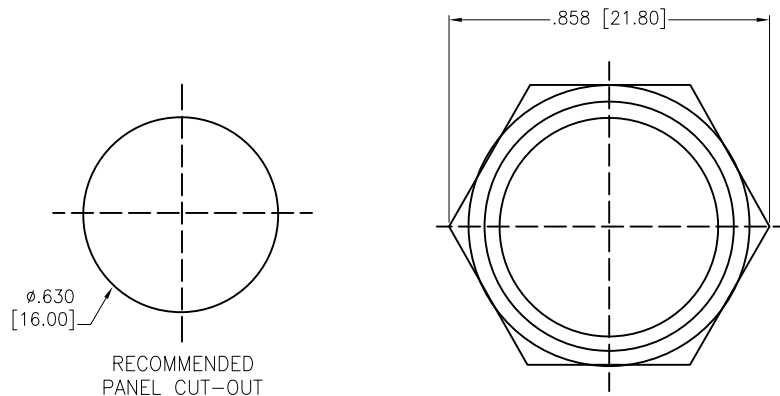

SPECIFICATIONS:

Material:
 Base: PBT, rated UL 94V-0
 Contact: Silver plated
 Nut: Brass, Nickel plated
 Button: Stainless steel or Copper plating chrome
 Bushing & Bezel: Stainless steel or Copper plating chrome
 Electrical:
 Rating: 3A @ 250V AC
 Contact resistance: 50 mΩ max
 Insulation resistance: 1000 MΩ min
 Dielectric withstanding voltage: 2000V AC for 1 minute
 Electrical Life: 50,000 cycles
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
 ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

DRAWN	OW	11/25/20
CHECKED	AC	11/25/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
 AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
 PERMISSION FROM ADAM TECH

**ADAM
 TECH**

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE SWITCH, ANTI-VANDAL SWITCH, SPST, MOMENTARY, SCREW LUG		REV. -	
SIZE X	PART NO. SW-PB7-1S-D-G1		
REF: S00204C	SCALE: NTS	SHEET 1 OF 1	