



ISL Products International

9V Battery Charger

NiCad - Class 2

CGR-I-7785/BULK

ISL Products designs and manufactures unique, application specific electromechanical components for a variety of applications and industries. If this product is not exactly what your looking for, contact us for a more suitable solution!

Contact Us for alternative solutions!



Electrical Specifications


Input Voltage:	120VAC
Input:	1.5VA

Output Voltage:	9V DC
Output Current:	14 mA

Additional Specifications

Battery Type:	9V - NiCad (Rechargeable)
Class:	Class 2
Safety Approvals:	UL / cUL

Dimensions

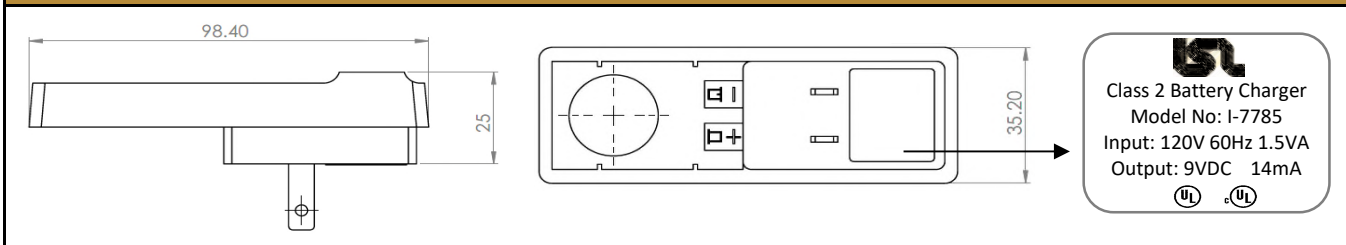

Usage Directions

Fig. 1

1.) Insert the 9v **rechargeable** battery into charger according to Fig. 1. Battery will snap into

Fig. 2

2.) Plug the charger into any household outlet for **10-12 hours** to fully recharge the 9v battery.

Fig. 3

3.) Remove charger from the outlet and remove the 9v battery using the finger hole.

- Important Safeguards -

- Do Not disassemble the charger.
- Do Not solder wires to the battery terminals
- Do Not short the charger at the battery terminals.

