
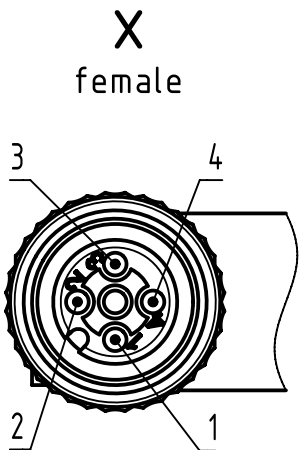



Connector Location A

Connector Location B

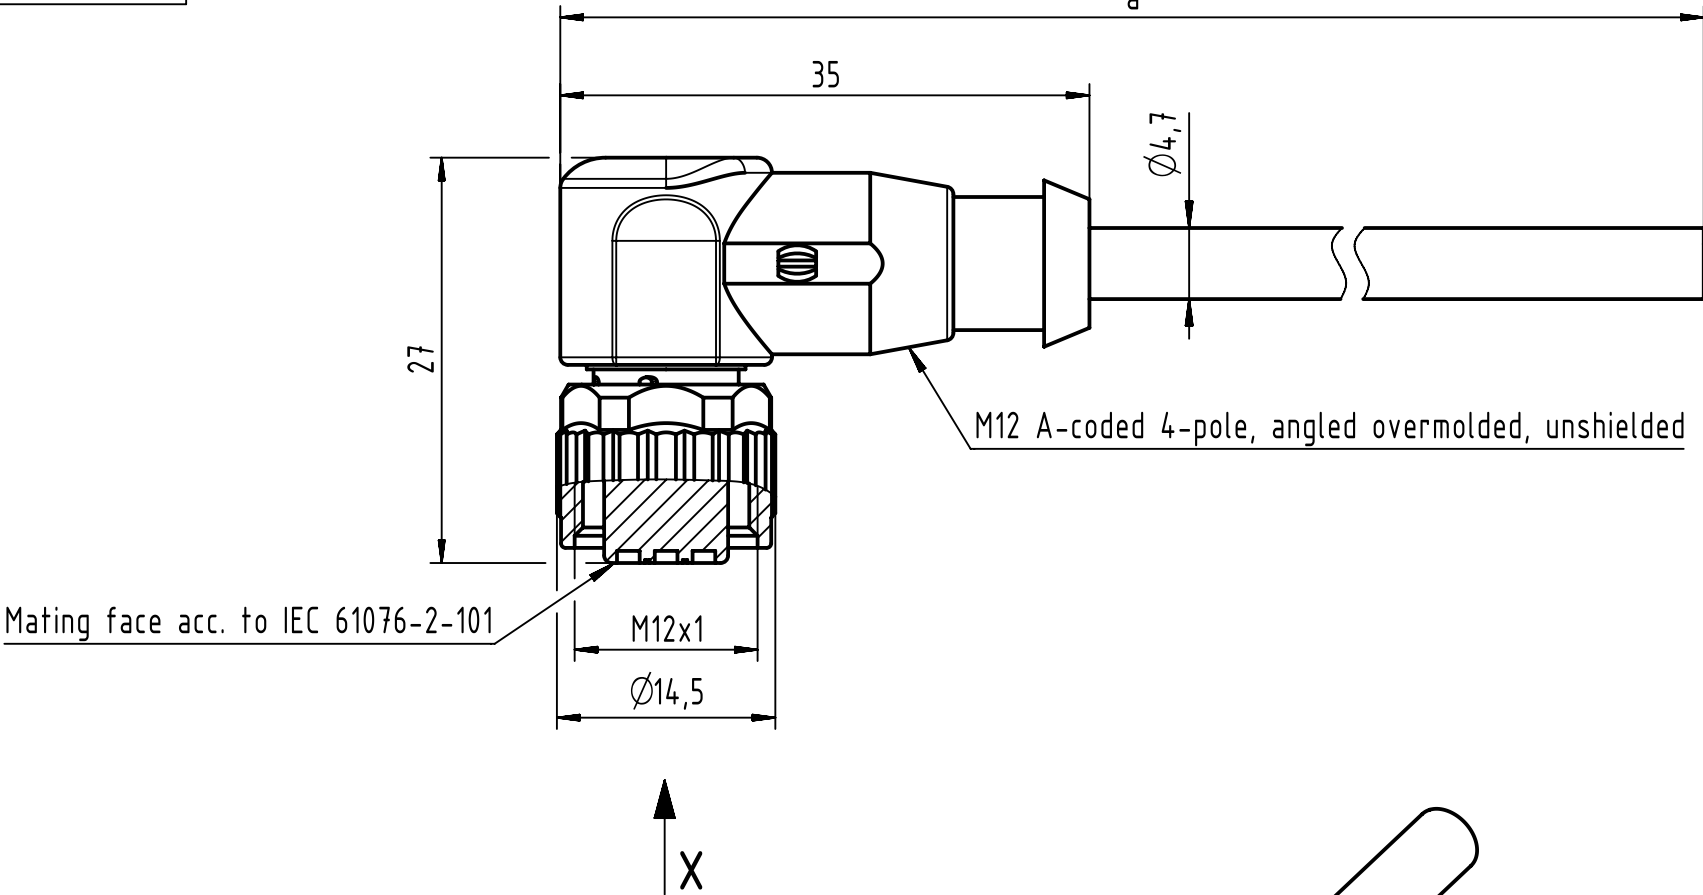

Loading-Plan:

- 1 brown
- 2 white
- 3 blue
- 4 black

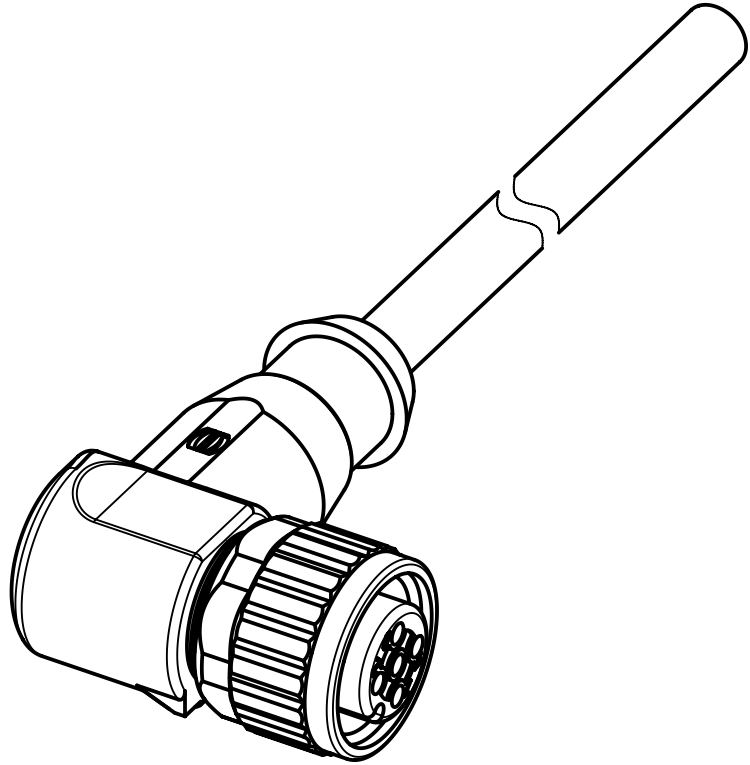

4.0 to 40	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	40	XXX=400
	39	XXX=390
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

Part no.	213487004XXXXX
Type of cable	XX
PVC grey, 4x0.34mm ²	XX=84
PUR light grey, 4x0.34mm ²	XX=61

- Protection level: IP65/67
- Temperature range: -25°C ... +80°C

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by COSTEA		Inspected by MUNTEANV		Standardisation MUNTEANV	
Department HCS - RO		Costea		Muntean		Date 2019-01-11	
HARTING Customised Solutions		Title M12 Cable Assembly A-cod an/- f/-		State Final Release		Doc-Key / ECM-Nr. 100578836/UGD/009/E 500000145017	
D-32339 Espelkamp		Type TB		Number 213487004XXXXX		Rev. E	
						Page 1/1	