


Electrical Specifications @ 25°C

IMPEDANCE @1KHZ/1V HP-4284A	DCR CH-502A	HI-POT TEST	INSULATION TEST
1 - 3 : 140 KOHM $\pm$ 20%	1 - 3: 2.7 KOHM $\pm$ 20%	PRI TO SEC: AC 1000V 3mA FOR 1 SEC	PRI TO SEC & CORE:
6 - 4 : 1 KOHM LOAD	6 - 4: 110 KOHM $\pm$ 20%	COIL TO CORE: AC 1000V 3mA FOR 1 SEC	100 MOHM MIN BY DC 500V

All specifications subject to change without notice.

MECHANICAL

DIMENSION:
UNIT: inch

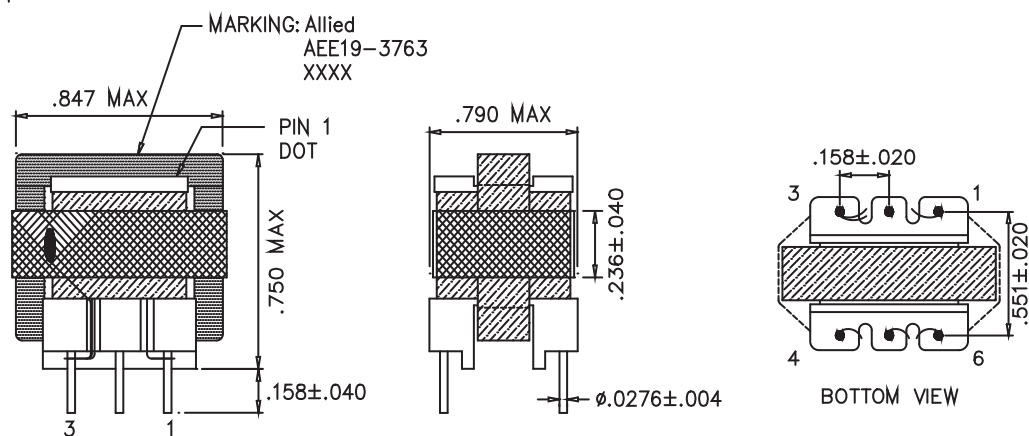

SCHEMATIC:

