

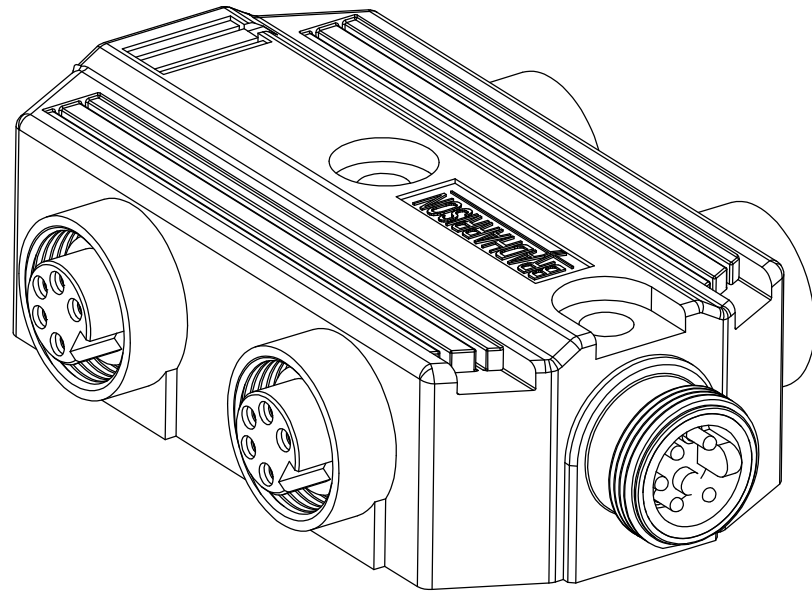
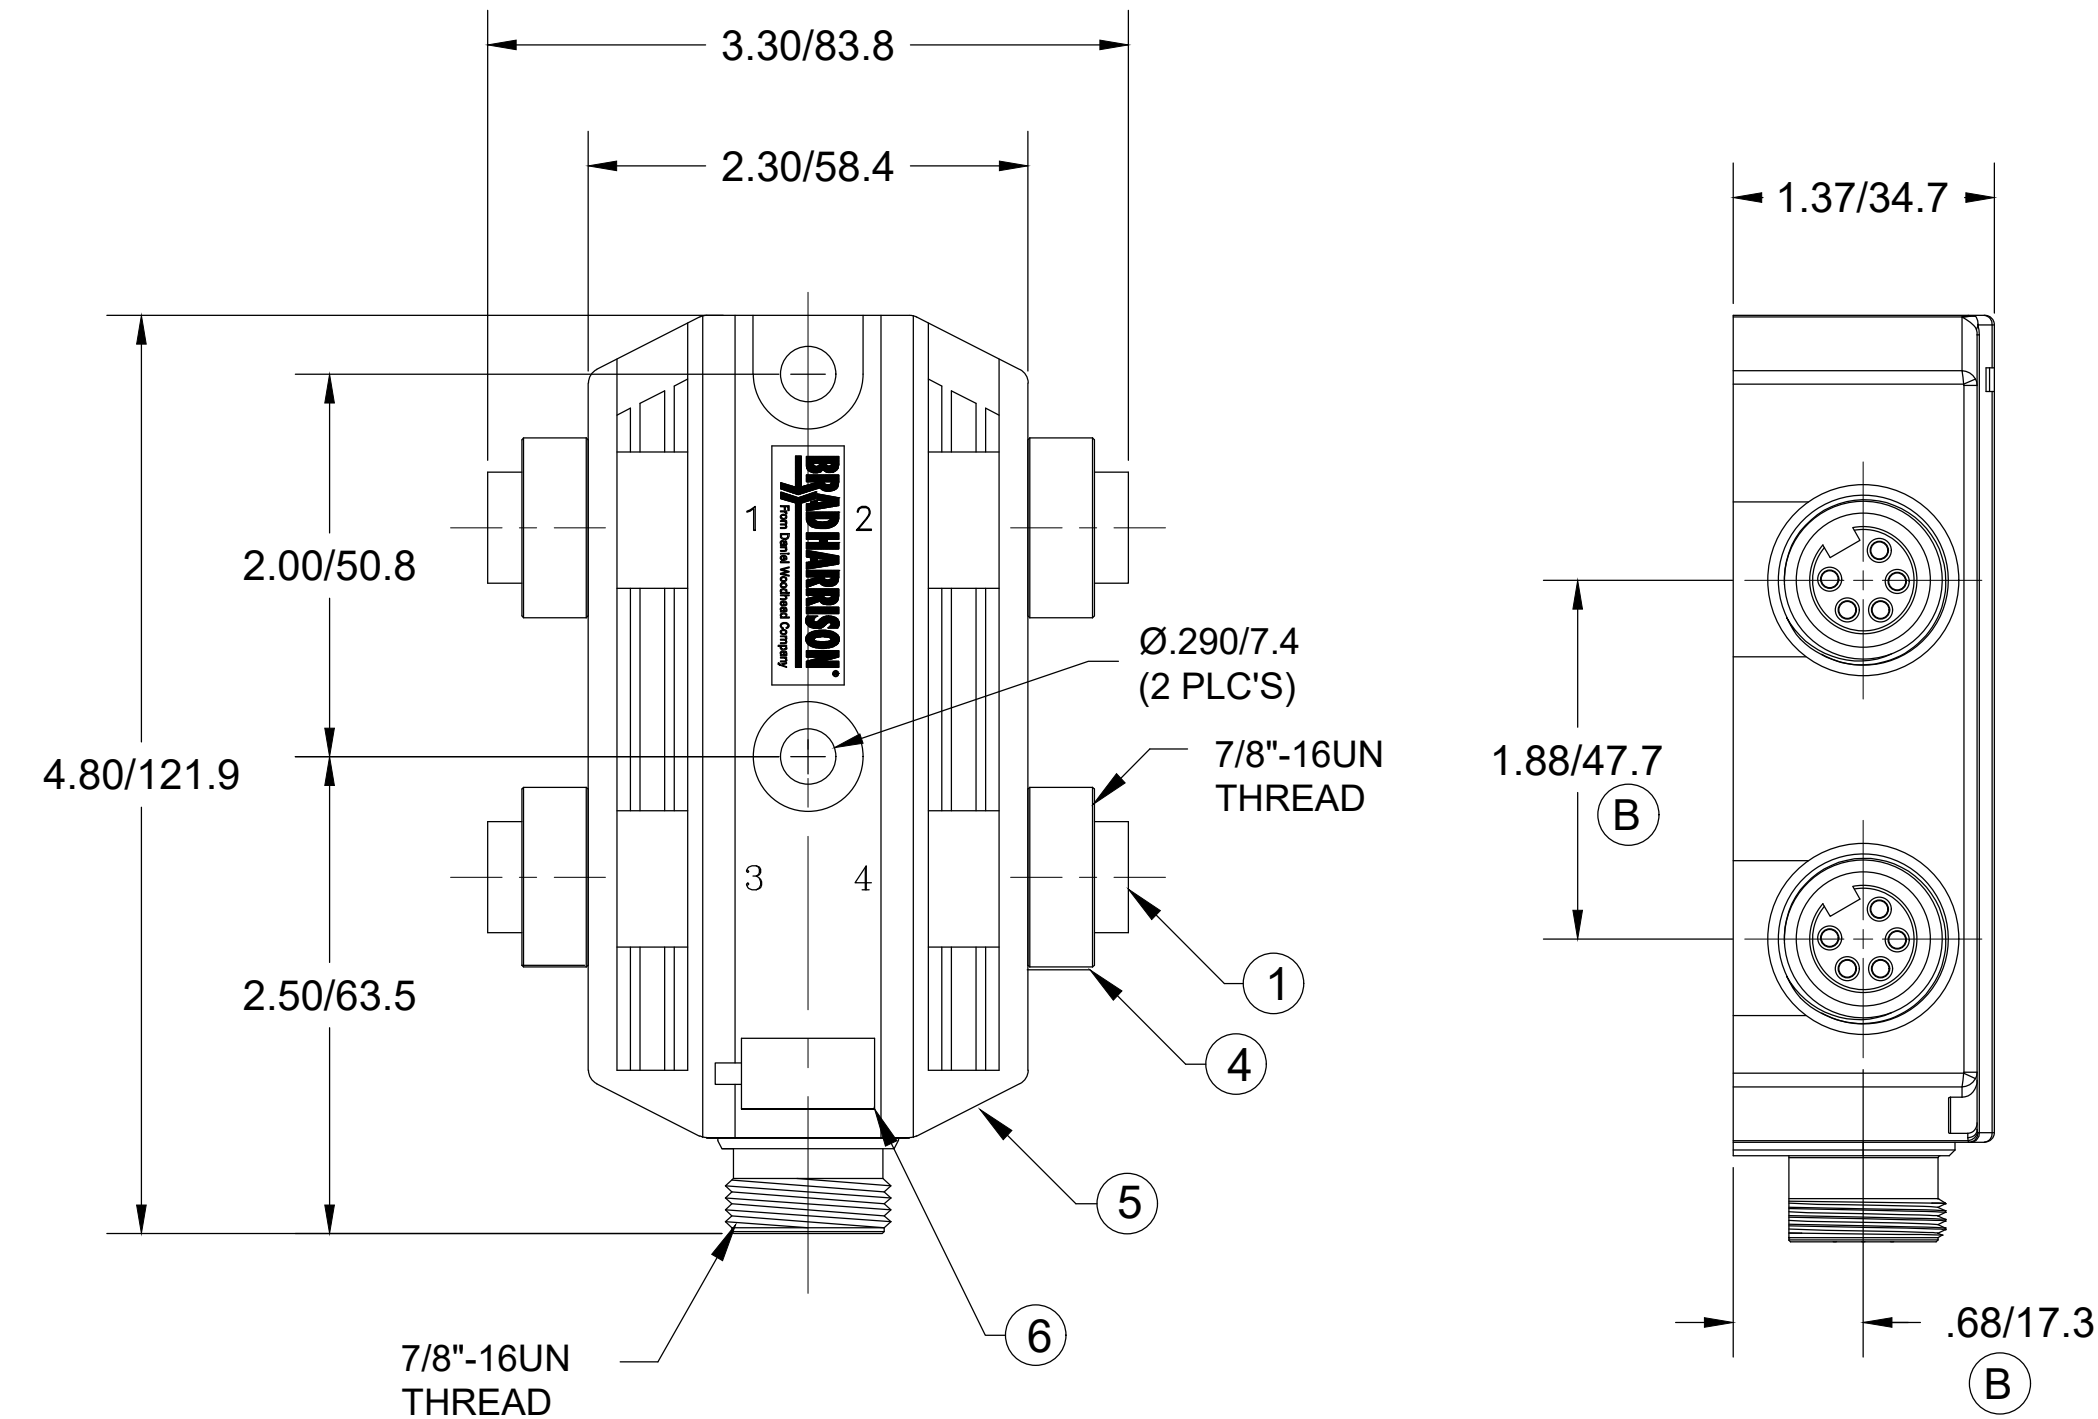
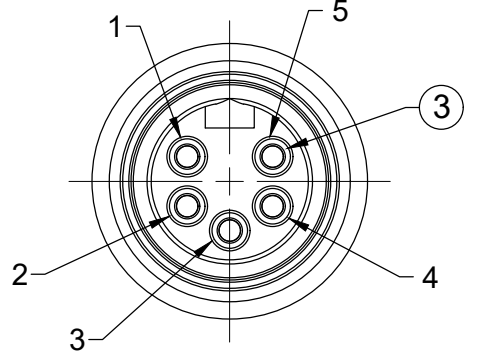


MATERIAL NUMBER	ENGINEERING NUMBER
1300360005	DN4000

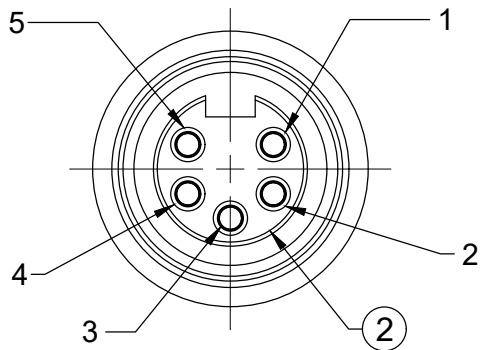

SCHEMATIC

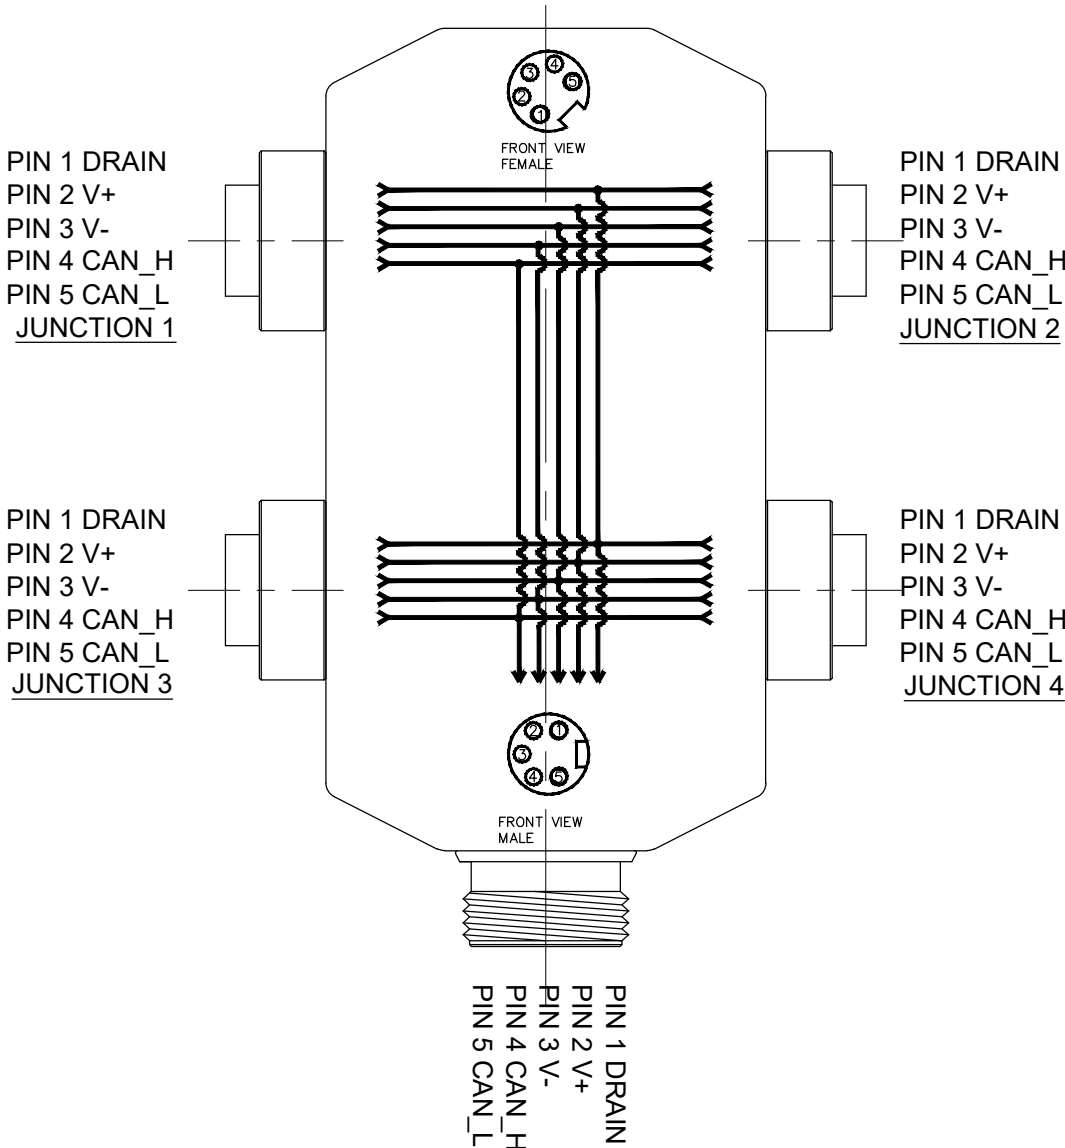

- NOTES:
- MATERIAL: AS NOTED
 - FINISH: AS NOTED
 - ELECTRICAL:
VOLTAGE RATING: 120 VAC/VDC
CURRENT: 7A
 - TEMP RATING: 0° TO +60°C
 - PROTECTION: IP67 (WHEN MATED)
 - COUPLING THREAD- AS NOTED
 - UL LISTED FILE: E152210 (B)
CSA CERTIFIED FILE: LR6837
 - ALL DIMENSIONS ARE FOR REFERENCE
UNLESS TOLERANCED OR NOTED OTHERWISE

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	TPE	GRAY
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
4	RECEPTACLE SHELL	ZINC DIE CAST	BLACK E-COATED
5	HOUSING	PBT	BLACK
6	LABEL	ABS	WHITE
	POTTING MATERIAL	EPOXY	BLACK

DOCUMENT STATUS	P1	RELEASE DATE	2020/10/23	13:29:06
-----------------	----	--------------	------------	----------

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	DIMENSION UNITS		SCALE		CURRENT REV DESC: ITEM#1 WAS PVC. ADDED UL FILE NO & CSA. ADDED DIM ZONE:F8			molex				
	INCH/MM		NTS									
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 645633 DRWN: ABENJAMINLW 2020/09/09 CHK'D: RSTONE 2020/09/29 APPR: BWOODMAN 2020/10/23			MINI-CHANGE MPIS, A SIZE, 5 POLE, FEMALE-MALE, 4 PORT DROP, SINGLE KEY, 18 AWG, DEVICENET				
	mm		INCH		PRODUCT CUSTOMER DRAWING							
	4 PLACES ±----		±----						DOCUMENT NUMBER SD-130036-001			
	3 PLACES ±----		±----									
	2 PLACES ±----		±----						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
	1 PLACE ±----		±----									
0 PLACES ±----		±----		DRAWING C-SIZE								
ANGULAR TOL ± ---- °								SERIES 130036				
				MATERIAL NUMBER SEE CHART								
								CUSTOMER GENERAL MARKET				
				SHEET NUMBER 1 OF 1								