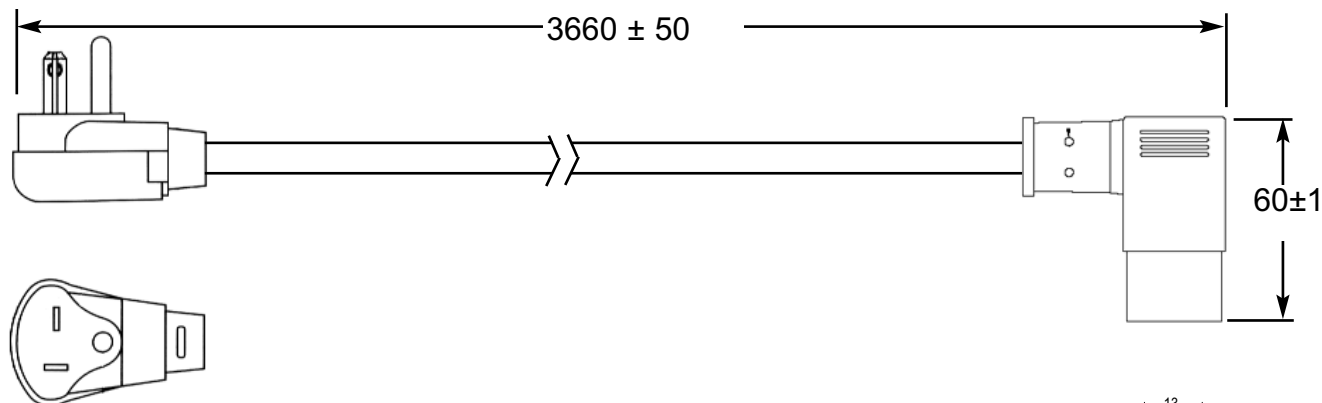



PROPRIETARY INFORMATION:


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 15679,BS	02/20/09	BS

'A'

'B'

GENERAL SPECIFICATIONS:

RATING: 16A / 125V AC
CABLE TYPE / SIZE: SJTW, 14 AWG x 3C
TEMPERATURE RATING: 105° C
CONDUCTOR COLORS: BLACK / WHITE / GREEN
CABLE JACKET COLOR: BLACK
OVERALL LENGTH (L): 3660 ± 50 mm
CABLE OUTER DIAMETER: 9.3 ± 0.2 mm
END 'A' TERMINATION: NEMA 5-20P, RIGHT ANGLE
END 'B' TERMINATION: IEC 320 /C19, RIGHT ANGLE
APPROVALS PLUG: UL, CSA or cUL
APPROVALS CABLE: UL, CSA or cUL
APPROVALS CONNECTOR: UL, CSA or cUL

**PACKING:
HANKING**

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVALS SYMBOLS OR FILE NUMBER(S).



Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice

DASH NO.	PART NO	REV.	DESCRIPTION		NOTES
TABULATION BLOCK					
		TOLERANCES:		 GlobTek®, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111	
		DECIMALS	ANGULAR		
		.xx +/- 0.1 .xxx +/- .005	+/- 1°		
INIT.BY: BS	DATE: 05/27/08	MILLIMETERS	ANGULAR	DWG TITLE: NORTH AMERICAN DETACHABLE CORDSET	
		.xx +/- 0.3 .xxx +/- .013	+/- 1°		
DRAWN: NF	DATE: 05/27/08	FSCN No.: G, CC, YL	SIZE A	MODEL: N / A	REV. A
APRVD: HM	DATE: 05/27/08	SCALE: NONE		PART NO: 37512312F7032L(R)	SHEET 1/1