


OD6025-24HB02A




DC Fan - 24V
60mm x 25mm (2.4" x 1.0")

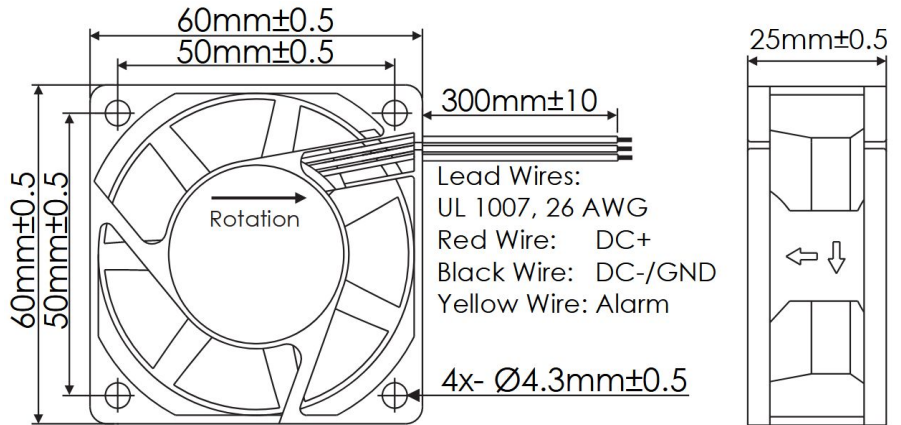

Frame	PBT, UL94 V-0 Plastic	Operating Temperature -20°C ~ +65°C Storage Temperature -20°C ~ +70°C Life Expectancy 60,000 Hours (L10 at 45°C) Installed Options Open Collector Alarm Weight: 0.14 lbs	
Impeller	PBT, UL94 V-0 Plastic		
Connection	3x Lead Wires, 26 AWG		
Motor	Brushless DC, Auto Cutoff, Auto Restart, Polarity Protected, Electronically Protected		
Bearing System	Ball Bearings		
Dielectric Strength	500VDC/min, <1mA		
Insulation Resistance	≥10MΩ @ 500 VDC		

Part Number	Rated Voltage (Volts DC)	Voltage Range (Volts DC)	Input Power (Watts)	Rated Current (Amps)	Rated Speed (RPM)	Airflow (CFM)	Noise Level (dBA)	Max. Static Pressure ("H ₂ O)
OD6025-24HB02A	24	15 ~ 26	2.8	0.12	3975	25	30	0.22

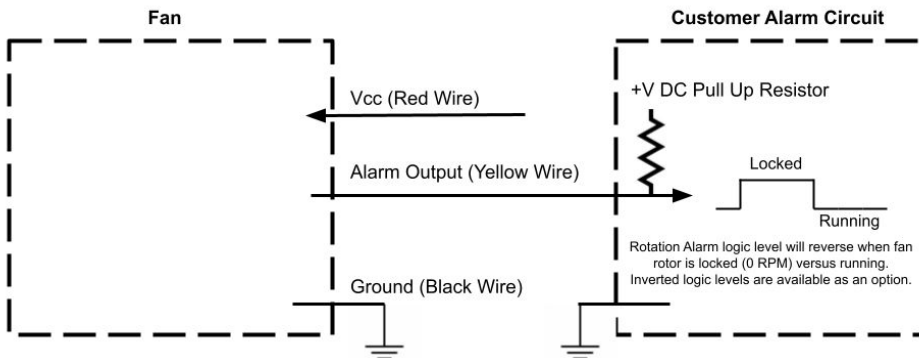

Alarm Max Pullup Voltage: 24V
Alarm Max Sink Current: 5mA
Alarm Active Locked Rotor State: HIGH