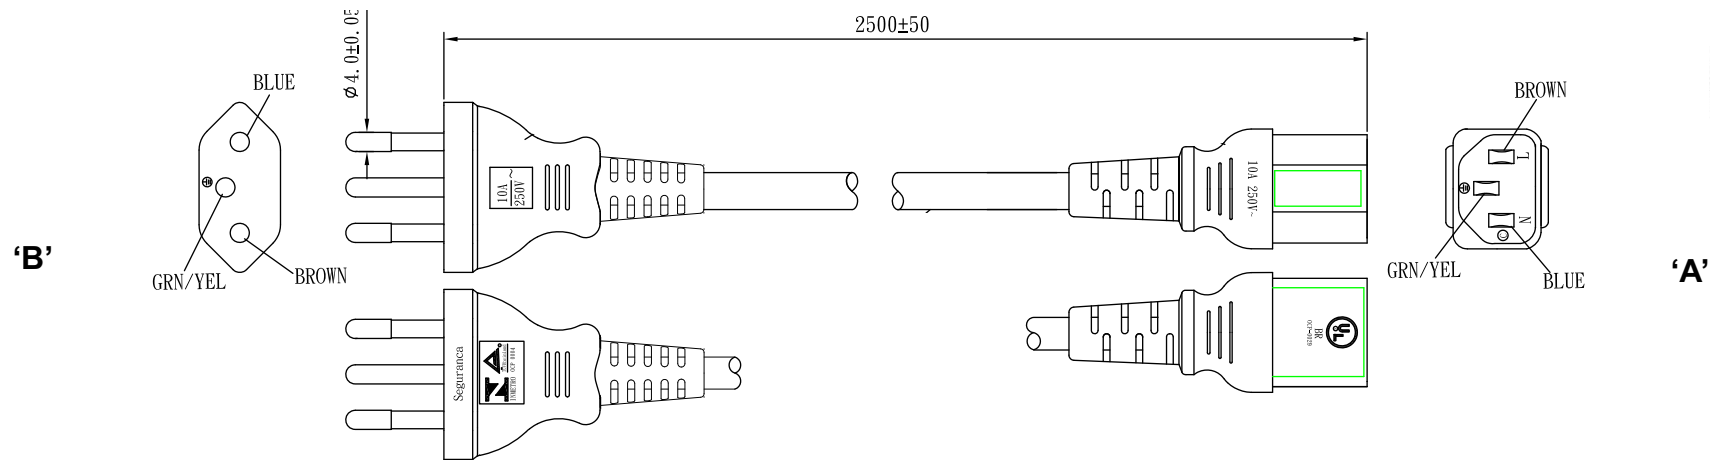


PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION


REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 17601, SO	12/01/09	BS
B	UPDATE END 'A' TO WS-311, END 'B' TO WS-002, RFS. 25251, EM	10/17/13	BS
C	UPDATE END 'A' TO YC-12, END 'B' TO YP-04, RFS. 25836, EM	03/11/15	HM


GENERAL SPECIFICATIONS:

RATING: 10A / 250 V AC
CABLE TYPE / SIZE: H05VV-F, 3 X 1.0 mm²
TEMPERATURE RATING: 70° C
CABLE JACKET COLOR: BLACK
OVERALL LENGTH (L): 2500 ± 50 mm
CABLE OUTER DIAMETER: 7.0 ± 0.2 mm
END 'A' TERMINATION: IEC 320/C13; YC-12
END 'B' TERMINATION: BRAZILIAN; YP-04
APPROVALS PLUG: INMETRO, UL BR
APPROVALS CONNECTOR: UL BR

PACKING:

HANKED
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

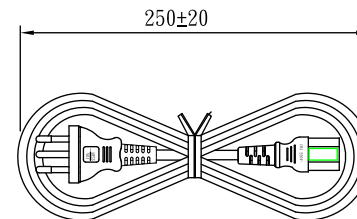
NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

RELEASED

By N.Frost at 5:09 pm, Mar 12, 2015



DASH NO.	PART NO	REV.	DESCRIPTION		NOTES
TABULATION BLOCK					
		TOLERANCES: DECIMALS .xx +/- 0.1 .xxx +/- .005		 GlobTek, Inc. www.globtek.com	186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		ANGULAR +/- 1°			
INIT.BY: SO	DATE: 12/01/09	MILLIMETERS .xx +/- 0.3 .xxx +/- .013	ANGULAR +/- 1°	DWG TITLE: BRAZILIAN DETACHABLE CORDSET	
DRAWN: NF	DATE: 12/01/09	FSCN No.: G, CC	SIZE A		REV. C
APRVD: HM	DATE: 12/01/09	SCALE: NONE		PART NO: 204B4272M5701(R)	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice