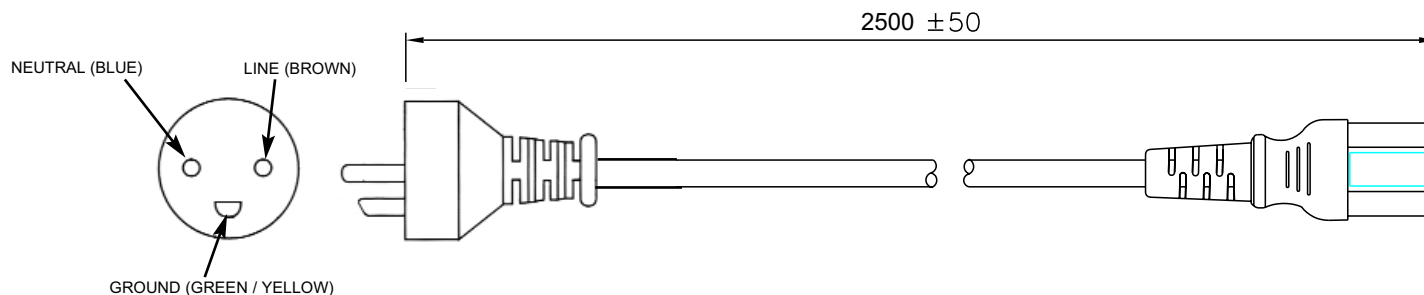


PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 21382, EM	08/08/11	HM

'A'

'B'
GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC
CABLE TYPE / SIZE: H05VV-F, 3 x 1.0 mm²
TEMPERATURE RATING: 70° C
CONDUCTOR COLORS: BROWN / BLUE/ GREEN-YELLOW
CABLE JACKET COLOR: BLACK
OVERALL LENGTH (L): 2500 ± 50 mm
CABLE OUTER DIAMETER: 8.5 ± 0.2 mm
END 'A' PLUG; DANISH MALE PLUG AFSNIT SECTION 107-2-D1 (SRAF 1962/DB)
END 'B' IEC-320 / C13
APPROVALS PLUG: DEMKO
APPROVALS CABLE: VDE, N, S, D, FI, KEMA, SEV, CEBEC, OVE,
APPROVALS CONNECTOR: VDE, N, S, D, FI, KEMA, UTE, CEBEC, OVE, IMQ, ASEV

PACKING:

BULK


NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



DASH NO.	PART NO	REV.	DESCRIPTION		NOTES
TABULATION BLOCK					
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1" .xxx +/- .005		 GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111	
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1" .xxx +/- .013			
INIT.BY: EM	DATE: 08/08/11			DWG TITLE: DANISH DETACHABLE CORDSET	
DRAWN: NF	DATE: 08/08/11	FSCN No.: G, CC	SIZE A	REV. A	
APRVD: HM	DATE: 08/08/11	SCALE: NONE		PART NO: G8014272M5701(R)	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice