



PDS(M)-734(D) PPDS(M)-734(D)-MTCP

Programmable (1x RS-232, 1x RS-485 and
1x RS-422/485) Serial-to-Ethernet Device Server
with 4x DI and 4x DO

■ Features

- Incorporate Serial Devices in an Ethernet network
- "Virtual COM" Extend COM Ports
- Virtual COM supports 32-bit and 64-bit Windows 7 SP1/10/2012/2016
- Powerful Programmable Device Server
- Watchdog Timer suitable for use in harsh environments
- Serial Port +/-4 kV ESD Protection Circuit
- Self-Tuner ASIC Controller on the RS-485 Port
- Built-in High Performance MiniOS7 from ICP DAS
- Supports Modbus TCP to RTU/ASCII Gateway
- Supports Latched D/I and Counter Functions
- Palm-Sized with multiple Serial Ports



■ System Specifications

Models		PDS-734 PDSM-734	PDS-734D PDSM-734D	PPDS-734-MTCP PPDSM-734-MTCP	PPDS-734D-MTCP PPDSM-734D-MTCP
CPU					
CPU		80186, 80 MHz or compatible			
SRAM		512 KB			
Flash Memory		Flash ROM: 512 KB; Erase unit is one sector (64 KB); 100,000 erase/write cycles			
EEPROM		16 KB; Data retention: 40 years; 1,000,000 erase/write cycles			
Built-in Watchdog Timer		Yes			
Communication Interface					
Non-isolated	COM1	RS-232 (TxD, RxD, RTS, CTS, GND)			
	COM2	RS-485 (D2+, D2-, GND)			
	COM3	RS-422 (TxD+, TxD-, RxD+, RxD-, GND) or RS-485 (D3+, D3-, GND)			
Ethernet		10/100 Base-TX, RJ-45 port (Auto-negotiating, auto MDI/MDI-X, LED indicator)			
PoE		-		IEEE 802.3af	
COM Port Formats					
Data Bit		7, 8: for COM1 and COM2 ∙ 5, 6, 7, 8: for COM3			
Parity		None, Even, Odd, Mark, Space None parity is required when using 8 data bits and 2 stop bits on COM1/COM2.			
Stop Bit		1, 2: for COM1 ~ COM3			
Baud Rate		115200 bps max.			
LED Indicators					
5-digit 7 Segment		-	Yes	-	Yes
System		Red			
PoE		-		Green	
Power					
Protection		Power Reverse Polarity Protection			
Required Supply Voltage		+10 Vdc ~ +30 Vdc		PoE or +12 Vdc ~ +48 Vdc	
Power Consumption		2.0 W	2.7 W	2.2 W	2.9 W
Mechanical					
Flammability		Fire Retardant Materials (UL94-V0 Level)			
Dimensions (W x L x H)		(P)PDS: 72 mm x 35 mm x 123 mm ∙ (P)PDSM: 102 mm x 29 mm x 125 mm			
Installation		DIN-Rail or Wall mounting			
Casing		Metal for PDSM/PPDSM ∙ Plastic for other			
Environment					
Operating Temperature		-25 °C ~ +75 °C			
Storage Temperature		-40 °C ~ +80 °C			
Humidity		5 ~ 90% RH, non-condensing			

Introduction

The PDS-700 series is a family of Programmable Device Servers, also known as "Serial-to-Ethernet gateway", that are designed for linking RS-232/422/485 devices to an Ethernet network. The user-friendly VxComm Driver/Utility allows users to easily turn the built-in COM ports of the PDS-700 series into standard COM ports on a PC. By virtue of its protocol independence, a small-core OS and high flexibility, the PDS-700 series is able to meet the demands of every network-enabled application.

The PDS-700 series includes a powerful and reliable Xserver programming structure that allows you to design your robust Ethernet applications in one day. The built-in, high-performance MiniOS7 boots the PDS-700 up in just one second and gives you fastest responses. It also works as a Modbus TCP to RTU/ASCII gateway that supports most SCADA/HMI communications based on the Modbus/TCP protocol.

The PPDS-700-MTCP series features true IEEE 802.3af-compliant (classification, Class 1) Power over Ethernet (PoE) using a standard category 5 Ethernet cable to receive power from a PoE switch like the NS-205PSE. The PDSM-700 is the PDS-700 with Metal Case (RoHS) and the PPDSM-700-MTCP is the PPDS-700-MTCP with Metal Case (RoHS). Metal Case version includes stronger protection than PDS-700 and PPDS-700-MTCP.

The PDS(M)-734(D) and PPDS(M)-734(D)-MTCP is equipped with 1 RS-232 port, 1 RS-485 port, 1 RS-422/485 port and DI/DO. The removable on-board terminal block connector is designed for easy and robust wiring in industrial situations.

Wiring



Input Type	DI Value as 0	DI Value as 1
Relay Contact	Relay ON 	Relay Off
TTL/CMOS Logic	Voltage < 1V 	Voltage > 3.5V
Open Collector	Open Collector On 	Open Collector Off
Output Type	DO Command as 1	DO Command as 0
Drive Relay	Relay ON 	Relay Off
Resistance Load		

I/O Specifications

Models	
Digital Output	
Output Channel	4
Output Type	Open Collector (Sink/NPN)
Load Voltage	30 V _{DC} , max.
Load Current	100 mA, max.
Isolated Voltage	Non-isolated
Digital Input	
Input Channel	4
Input Type	Source (Dry Type), Common Ground
Off Voltage Level	+1 V max.
On Voltage Level	+3.5 ~ +30 V
Isolated Voltage	Non-isolated
Counters	Channels: 4
	Max. Count: 16-bit (65535)
	Max. Input Frequency: 100 Hz
	Min. Pulse Width: 5 ms


Pin Assignments

Terminal No.	Pin Assignment
E1	Link/Act
	10/100M
COM1	01 CTS1
	02 RTS1
	03 Rx/D1
	04 Tx/D1
COM2	05 INIT*
	06 D2+
	07 D2-
	08 (R)+Vs
	09 (B)GND

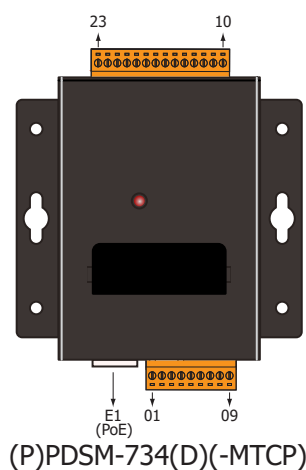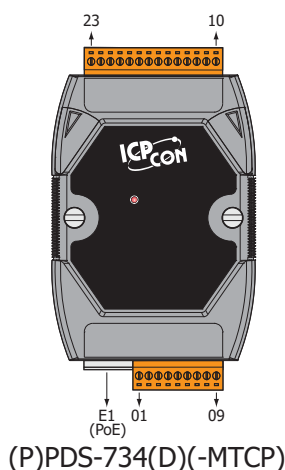

Terminal No.	Pin Assignment
DO	23 DO3
	22 DO2
	21 DO1
	20 DO0
	19 DO.PWR
DI	18 GND
	17 DI3
	16 DI2
	15 DI1
	14 DI0
COM3	13 Rx/D3-
	12 Rx/D3+
	11 Tx/D3-/D3-
	10 Tx/D3+/D3+

■ Dimensions (Units: mm)

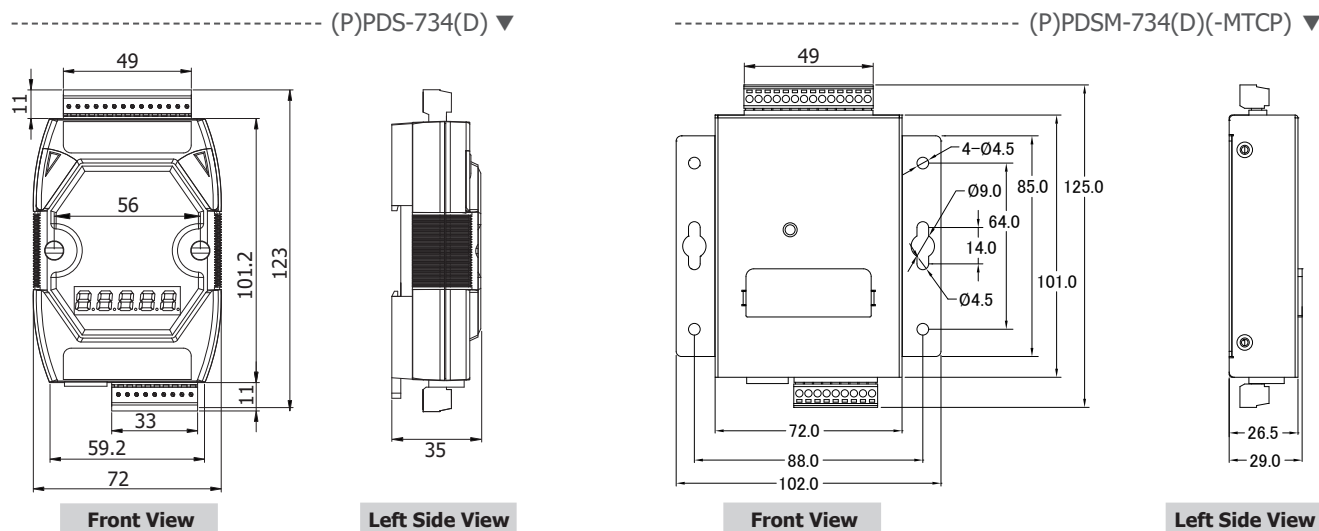

■ Ordering Information

PDS-734 CR	Programmable (1x RS-232, 1x RS-485 and 1x RS-422/485) Serial-to-Ethernet Device Server with 4x DI and 4x DO (RoHS) Includes CA-0910 Cable
PDS-734D CR	Programmable (1x RS-232, 1x RS-485 and 1x RS-422/485) Serial-to-Ethernet Device Server with 4x DI and 4x DO and LED Display (RoHS) Includes CA-0910 Cable
PPDS-734-MTCP CR	Programmable (1x RS-232, 1x RS-485 and 1x RS-422/485) Serial-to-Ethernet Device Server with 4x DI and 4x DO, PoE and Modbus Gateway (RoHS) Includes CA-0910 Cable
PPDS-734D-MTCP CR	Programmable (1x RS-232, 1x RS-485 and 1x RS-422/485) Serial-to-Ethernet Device Server with 4x DI and 4x DO, PoE, Modbus Gateway and LED Display (RoHS) Includes CA-0910 Cable
PDSM-734 CR	Programmable (1x RS-232, 1x RS-485 and 1x RS-422/485) Serial-to-Ethernet Device Server with 4x DI and 4x DO (Metal Case) (RoHS) Includes CA-0910 Cable
PDSM-734D CR	Programmable (1x RS-232, 1x RS-485 and 1x RS-422/485) Serial-to-Ethernet Device Server with 4x DI and 4x DO and LED Display (Metal Case) (RoHS) Includes CA-0910 Cable
PPDSM-734-MTCP CR	Programmable (1x RS-232, 1x RS-485 and 1x RS-422/485) Serial-to-Ethernet Device Server with 4x DI and 4x DO, PoE and Modbus Gateway (Metal Case) (RoHS) Includes CA-0910 Cable
PPDSM-734D-MTCP CR	Programmable (1x RS-232, 1x RS-485 and 1x RS-422/485) Serial-to-Ethernet Device Server with 4x DI and 4x DO, PoE, Modbus Gateway and LED Display (Metal Case) (RoHS) Includes CA-0910 Cable

■ Accessories

CA-0903 CR	DB9 Female to 5-wire Cable [RS-232], 30cm (RoHS)
NS-205 CR	Unmanaged 5-port Industrial Ethernet Switch (RoHS)
NS-205PSE CR	Unmanaged 5-port 10/100 Mbps PoE (PSE) Ethernet Switch (RoHS)