

V3L-3003-D8

CATALOG LISTING

PAGE 1 OF 1

RELEASE NO. PR-1056

M

ISSUE 17

CHECK

29APR05

AK

CHECK

9 OCT 98

JAF

CHECK

9 OCT 98


CHECK

9 OCT 98

FORMTEK

DRAWN

TSM

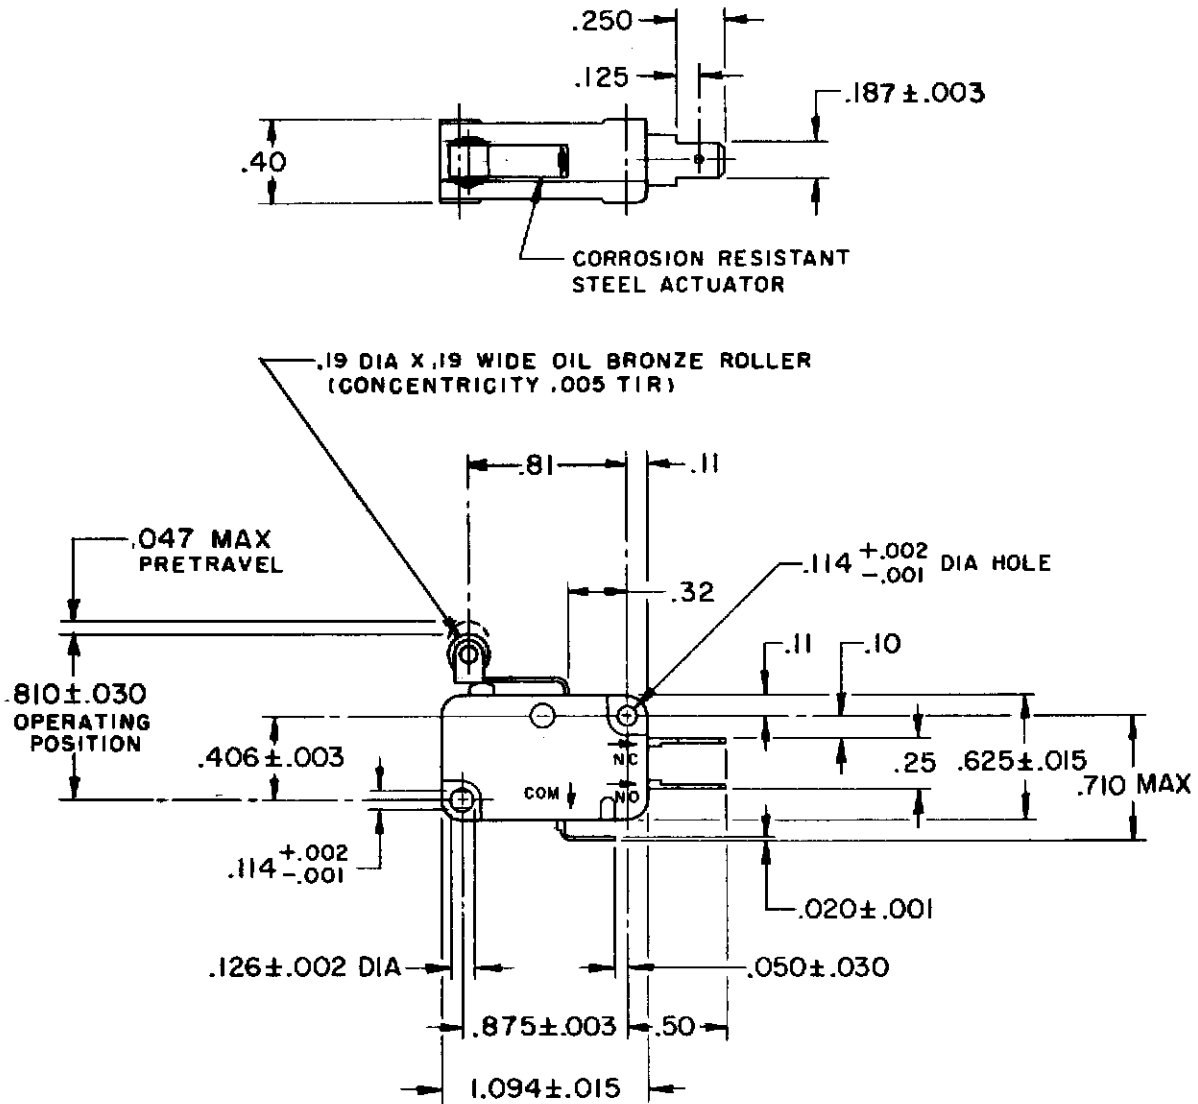


NOTES

- 1 - SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 302°F
- 2 - CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING FIVE POUNDS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE - - - 195 GRAMS MAX
RELEASE FORCE - - - - - 15 GRAM MIN
DIFFERENTIAL TRAVEL - - - .013 MAX
OVERTRAVEL - - - - - .040 MIN
RELEASE TRAVEL - - - - - .007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L83

15.1A 1/2HP 125 OR 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"



SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT