




INSULATION DISPLACEMENT CABLE:
0.0394" PITCH, 28 AWG, STRANDED EXTRUDED FEP

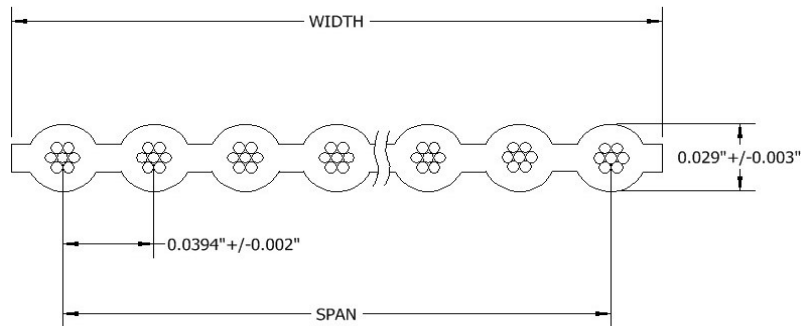

Cond. No.	Part Number	Span	Width
4	1000570197	0.118" $\pm$ 0.005"	0.158" $\pm$ 0.007"
5	1000570424	0.158" $\pm$ 0.005"	0.197" $\pm$ 0.007"
6	1000570082	0.197" $\pm$ 0.007"	0.237" $\pm$ 0.007"
8	1000570218	0.276" $\pm$ 0.007"	0.315" $\pm$ 0.007"
10	1000570140	0.354" $\pm$ 0.007"	0.394" $\pm$ 0.007"
10	1000570141	0.354" $\pm$ 0.007"	0.394" $\pm$ 0.007"
12	1000570145	0.433" $\pm$ 0.007"	0.472" $\pm$ 0.007"
12	1000570146	0.433" $\pm$ 0.007"	0.472" $\pm$ 0.007"
14	1000570149	0.512" $\pm$ 0.007"	0.551" $\pm$ 0.007"
14	1000570426	0.512" $\pm$ 0.007"	0.551" $\pm$ 0.007"
16	1000570155	0.590" $\pm$ 0.007"	0.630" $\pm$ 0.007"
16	1000570156	0.590" $\pm$ 0.007"	0.630" $\pm$ 0.007"
20	1000570161	0.748" $\pm$ 0.010"	0.787" $\pm$ 0.010"
20	1000570162	0.748" $\pm$ 0.010"	0.787" $\pm$ 0.010"
24	1000570168	0.906" $\pm$ 0.010"	0.945" $\pm$ 0.010"
26	1000570173	0.984" $\pm$ 0.010"	1.024" $\pm$ 0.010"
26	1000570174	0.984" $\pm$ 0.010"	1.024" $\pm$ 0.010"
30	1000570179	1.142" $\pm$ 0.010"	1.181" $\pm$ 0.010"
30	1000570180	1.142" $\pm$ 0.010"	1.181" $\pm$ 0.010"
34	1000570185	1.299" $\pm$ 0.010"	1.338" $\pm$ 0.010"
34	1000570474	1.299" $\pm$ 0.010"	1.338" $\pm$ 0.010"
40	1000570192	1.535" $\pm$ 0.010"	1.575" $\pm$ 0.010"
40	1000570193	1.535" $\pm$ 0.010"	1.575" $\pm$ 0.010"
44	1000570200	1.693" $\pm$ 0.010"	1.732" $\pm$ 0.010"
44	1000570201	1.693" $\pm$ 0.010"	1.732" $\pm$ 0.010"
50	1000570202	1.929" $\pm$ 0.010"	1.968" $\pm$ 0.010"
50	1000570203	1.929" $\pm$ 0.010"	1.968" $\pm$ 0.010"

CHARACTERISTICS	
Conductor	28 AWG, 7/36, Silver Plated Copper
Insulation	FEP
Color	Blue Or Blue with Blue Polarity Stripe
Impedance (ohms)	105 Unbalanced
Capacitance (pF/ft)	11.5 Unbalanced
Inductance (uH/ft)	0.12 Unbalanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	-55°C to 200°C

STANDARD PACKAGING

100 ft./spool, 10 Ft. minimum length

UL STYLE 20424