

CMPT2369

**SURFACE MOUNT  
NPN SILICON TRANSISTOR**



**SOT-23 CASE**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMPT2369 type is an NPN silicon transistor manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for small signal general purpose and high speed switching applications.

**MARKING CODE: C1J**

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

Collector-Base Voltage  
Collector-Emitter Voltage  
Collector-Emitter Voltage  
Emitter-Base Voltage  
Continuous Collector Current  
Power Dissipation  
Operating and Storage Junction Temperature  
Thermal Resistance

**SYMBOL**

$V_{CBO}$  40  
 $V_{CES}$  40  
 $V_{CEO}$  15  
 $V_{EBO}$  4.5  
 $I_C$  500  
 $P_D$  350  
 $T_J, T_{stg}$  -65 to +150  
 $\Theta_{JA}$  357

**UNITS**

V  
V  
V  
V  
mA  
mW  
 $^\circ\text{C}$   
 $^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

| SYMBOL        | TEST CONDITIONS                                                                 | MIN | MAX  | UNITS         |
|---------------|---------------------------------------------------------------------------------|-----|------|---------------|
| $I_{CBO}$     | $V_{CB}=20\text{V}$                                                             |     | 0.4  | $\mu\text{A}$ |
| $I_{CBO}$     | $V_{CB}=20\text{V}, T_A=125^\circ\text{C}$                                      |     | 30   | $\mu\text{A}$ |
| $BV_{CBO}$    | $I_C=10\mu\text{A}$                                                             | 40  |      | V             |
| $BV_{CES}$    | $I_C=10\mu\text{A}$                                                             | 40  |      | V             |
| $BV_{CEO}$    | $I_C=10\text{mA}$                                                               | 15  |      | V             |
| $BV_{EBO}$    | $I_E=10\mu\text{A}$                                                             | 4.5 |      | V             |
| $V_{CE(SAT)}$ | $I_C=10\text{mA}, I_B=1.0\text{mA}$                                             |     | 0.25 | V             |
| $V_{BE(SAT)}$ | $I_C=10\text{mA}, I_B=1.0\text{mA}$                                             | 0.7 | 0.85 | V             |
| $h_{FE}$      | $V_{CE}=1.0\text{V}, I_C=10\text{mA}$                                           | 40  | 120  |               |
| $h_{FE}$      | $V_{CE}=2.0\text{V}, I_C=100\text{mA}$                                          | 20  |      |               |
| $C_{ob}$      | $V_{CB}=5.0\text{V}, I_E=0, f=1.0\text{MHz}$                                    |     | 4.0  | pF            |
| $f_T$         | $V_{CE}=10\text{V}, I_C=10\text{mA}, f=100\text{MHz}$                           | 500 |      | MHz           |
| $t_s$         | $V_{CC}=3.0\text{V}, I_C=I_{B1}=I_{B2}=10\text{mA}$                             |     | 13   | ns            |
| $t_{on}$      | $V_{CC}=3.0\text{V}, I_C=10\text{mA}, I_{B1}=3.0\text{mA}$                      |     | 12   | ns            |
| $t_{off}$     | $V_{CC}=3.0\text{V}, I_C=10\text{mA}, I_{B1}=3.0\text{mA}, I_{B2}=1.5\text{mA}$ |     | 18   | ns            |


R5 (1-February 2010)

CMPT2369

SURFACE MOUNT  
NPN SILICON TRANSISTOR



SOT-23 CASE - MECHANICAL OUTLINE

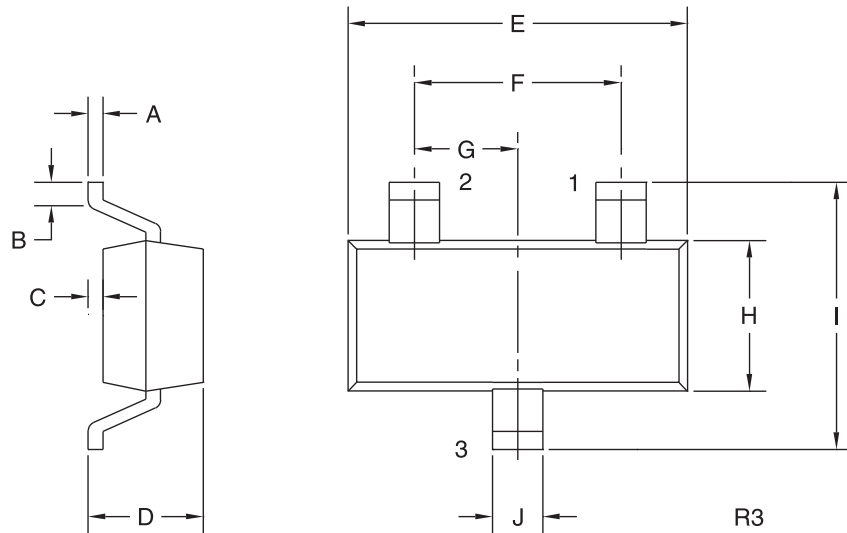

LEAD CODE:

- 1) Base
- 2) Emitter
- 3) Collector

MARKING CODE: C1J

| DIMENSIONS |        |       |             |      |
|------------|--------|-------|-------------|------|
| SYMBOL     | INCHES |       | MILLIMETERS |      |
|            | MIN    | MAX   | MIN         | MAX  |
| A          | 0.003  | 0.007 | 0.08        | 0.18 |
| B          | 0.006  | -     | 0.15        | -    |
| C          | -      | 0.005 | -           | 0.13 |
| D          | 0.035  | 0.043 | 0.89        | 1.09 |
| E          | 0.110  | 0.120 | 2.80        | 3.05 |
| F          | 0.075  |       | 1.90        |      |
| G          | 0.037  |       | 0.95        |      |
| H          | 0.047  | 0.055 | 1.19        | 1.40 |
| I          | 0.083  | 0.098 | 2.10        | 2.49 |
| J          | 0.014  | 0.020 | 0.35        | 0.50 |

SOT-23 (REV: R3)

R5 (1-February 2010)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)