

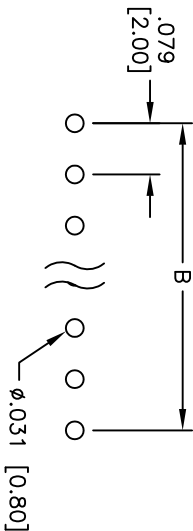
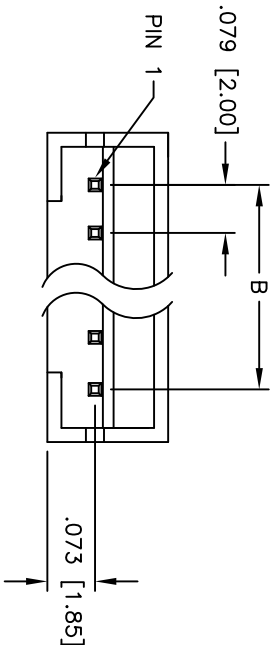


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	
A		ADDED DIM.	4/25/13	

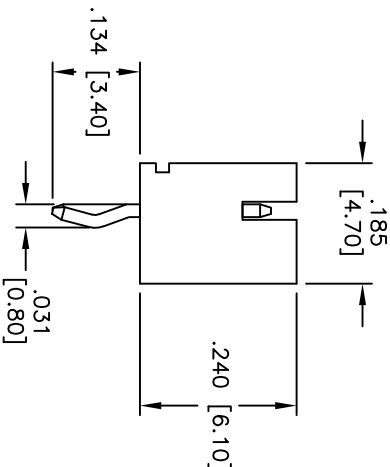

PCB LAYOUT

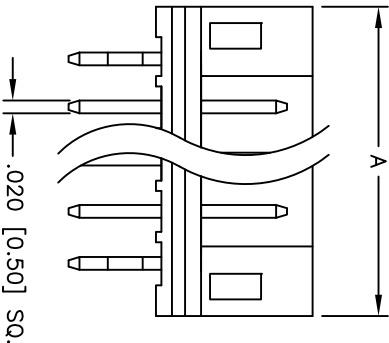

SPECIFICATIONS:

Material: Insulator: Nylon 66, rated UL 94V-0
Insulator color: White
Contacts: Brass
Plating: Tin over Copper underplate overall
Electrical: Operating voltage: 100 VAC max
Current rating: 2 Amps max
Contact resistance: 10 mohms max
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating: Operating temperature: -25°C to +85°C
Environmental: Lead free, RoHS compliant

Positions: 2 thru 15
A = .079 [2.00] x No. of Positions + .075 [1.90]
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X	± .10	ØXX	± .10	TITLE .079 [2.00] SHROUDED HEADER STRAIGHT, PCB			
.XX	± .020	ØXXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	SS			4/7/05	SIZE	PART NO.	REV.
CHECKED					X	2SH-C-XX-TS	A
APPROVED					REF:	SCALE: NTS	SHEET 1 OF 1