

CMIDSH1-3
CMIDSH1-4
CMIDSH1-6

SURFACE MOUNT SILICON
LOW V_F SCHOTTKY RECTIFIERS
1 AMP, 30 THRU 60 VOLT



SOD-323FL CASE

FEATURES:

- Low package profile
- High reverse voltage capability
- Low leakage current

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Peak Repetitive Reverse Voltage

Average Forward Current ($T_L=110^\circ\text{C}$)

Peak Forward Surge Current, $t_p=8.3\text{ms}$

Power Dissipation

Operating and Storage Junction Temperature

Thermal Resistance (Note 1)

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$)

SYMBOL **TEST CONDITIONS**

I_R $V_R=\text{Rated } V_{RRM}$

V_F $I_F=0.7\text{A}$

V_F $I_F=1.0\text{A}$

C_J $V_R=4.0\text{V}$, $f=1.0\text{MHz}$

Note 1: FR-4 epoxy PCB with minimum copper pad area.



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMIDSH1-3, CMIDSH1-4, and CMIDSH1-6 are silicon Schottky rectifiers packaged in a space saving flat lead, low profile SOD-323FL case. These devices have been designed for applications requiring a low forward voltage drop.

MARKING CODES: CMIDSH1-3: C13

CMIDSH1-4: C14

CMIDSH1-6: C16

APPLICATIONS:

- DC-DC converters
- Voltage clamping
- Reverse polarity protection
- General purpose rectification

SYMBOL	CMIDSH1-3	CMIDSH1-4	CMIDSH1-6	UNITS
V_{RRM}	30	40	60	V
I_O		1.0		A
I_{FSM}		20		A
P_D		308		mW
T_J, T_{stg}		-65 to +150		$^\circ\text{C}$
Θ_{JA}		405		$^\circ\text{C/W}$


CMIDSH1-3		CMIDSH1-4		CMIDSH1-6		UNITS
TYP	MAX	TYP	MAX	TYP	MAX	
25	100	10	100	20	100	μA
0.41	0.45	0.43	0.52	0.48	0.58	V
0.44	0.52	0.46	0.58	0.53	0.68	V
70	-	51	-	45	-	pF

CMIDSH1-3
CMIDSH1-4
CMIDSH1-6

**SURFACE MOUNT SILICON
LOW V_F SCHOTTKY RECTIFIERS
1 AMP, 30 THRU 60 VOLT**



SOD-323FL CASE - MECHANICAL OUTLINE

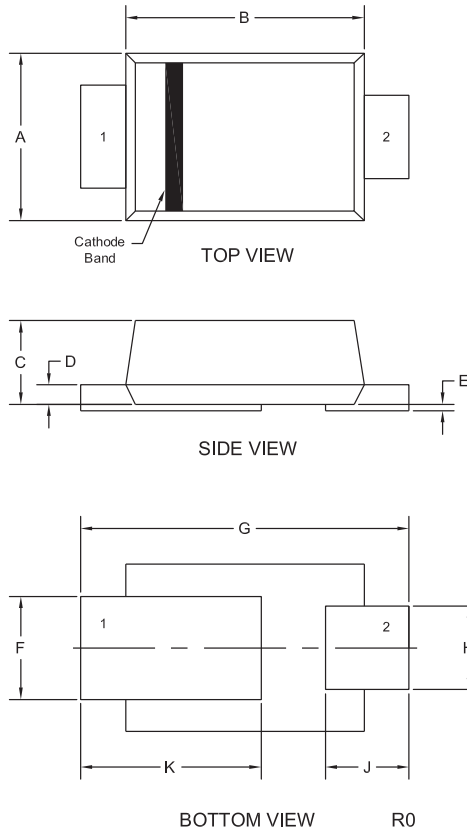

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.047	0.055	1.20	1.40
B	0.068	0.077	1.75	1.95
C	0.021	0.030	0.55	0.75
D	0.004	0.008	0.10	0.20
E	-	0.004	-	0.10
F	0.025	0.038	0.65	0.95
G	0.090	0.107	2.30	2.70
H	0.017	0.030	0.45	0.75
J	0.015	0.032	0.40	0.80
K	0.045	0.061	1.15	1.55

SOD-323FL (REV:R0)

LEAD CODE:

- 1) Cathode
- 2) Anode

**MARKING CODES: CMIDSH1-3: C13
CMIDSH1-4: C14
CMIDSH1-6: C16**





R3 (10-November 2015)

CMIDSH1-3
CMIDSH1-4
CMIDSH1-6

SURFACE MOUNT SILICON
LOW V_F SCHOTTKY RECTIFIERS
1 AMP, 30 THRU 60 VOLT



TYPICAL ELECTRICAL CHARACTERISTICS

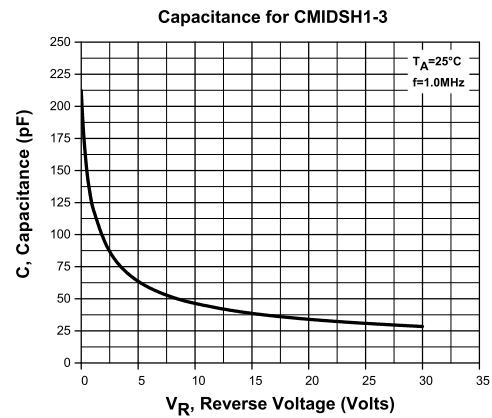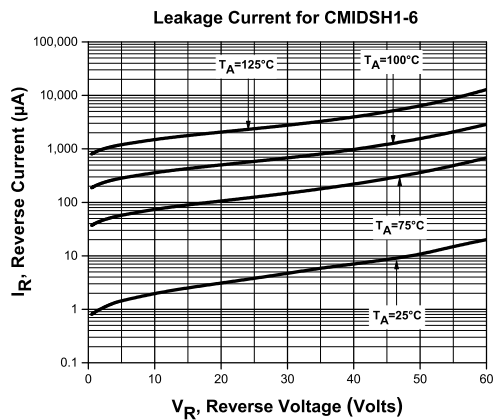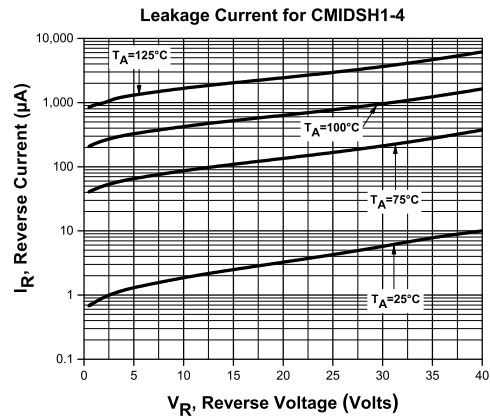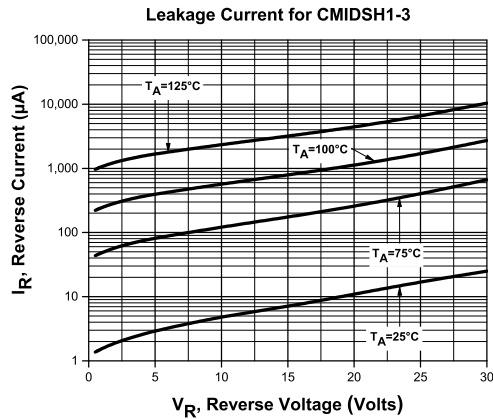





R3 (10-November 2015)

CMIDSH1-3
CMIDSH1-4
CMIDSH1-6

SURFACE MOUNT SILICON
LOW V_F SCHOTTKY RECTIFIERS
1 AMP, 30 THRU 60 VOLT



TYPICAL ELECTRICAL CHARACTERISTICS

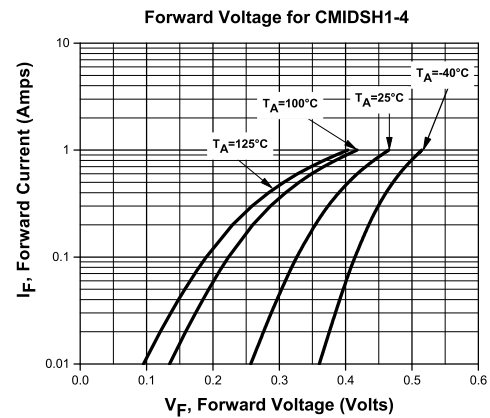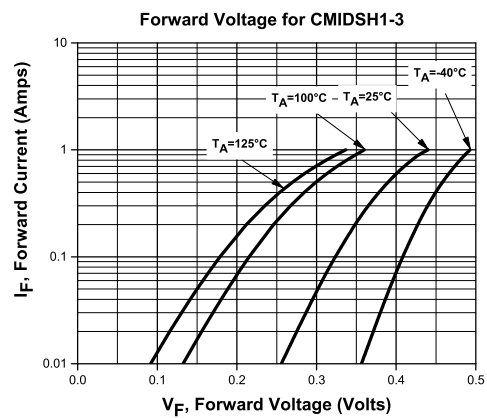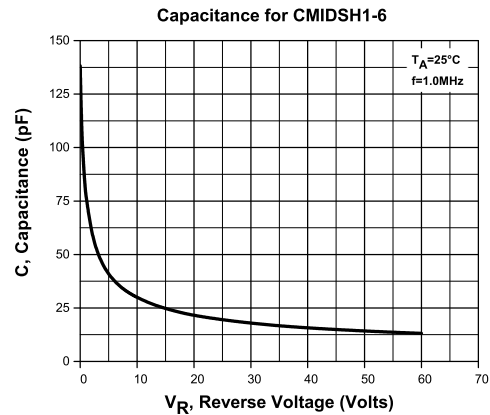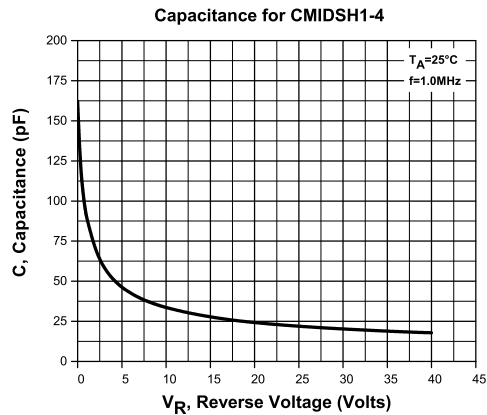




R3 (10-November 2015)

CMIDSH1-3
CMIDSH1-4
CMIDSH1-6

SURFACE MOUNT SILICON
LOW V_F SCHOTTKY RECTIFIERS
1 AMP, 30 THRU 60 VOLT



TYPICAL ELECTRICAL CHARACTERISTICS

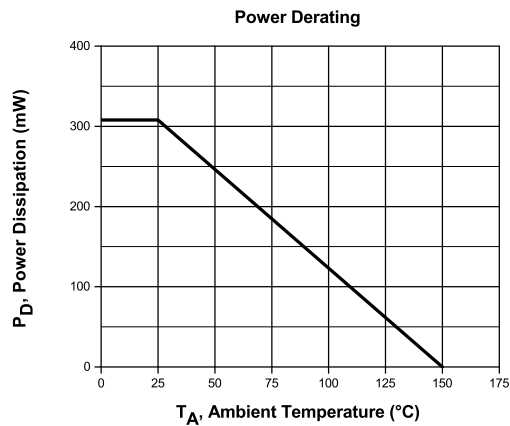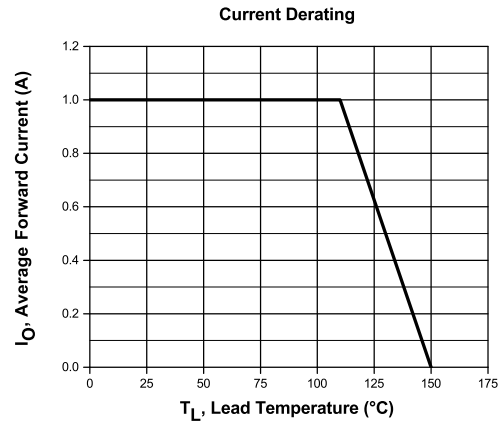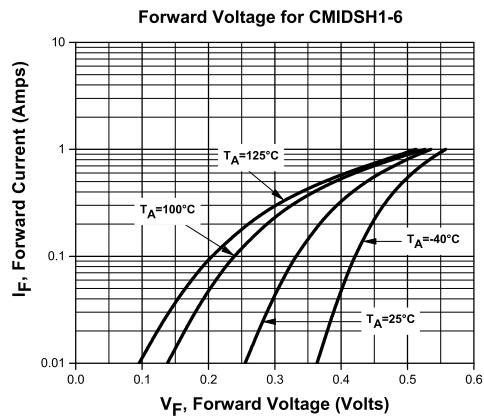

R3 (10-November 2015)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms