

6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A	510210600	PicoBlade1.25 Rec Hsg 6P		1	PC
B	500588000	PicoBlade1.25 Crimp Rec Term Chain Tin		6	PC
C	--	Blank label 12.7x35.5mm (WHT:12.7mm) HF		1	PC
D	510470600	PicoBlade1.25 Plug Hsg 6P		1	PC
E	501338000	PicoBlade1.25 Crimp Plug Term Chain		6	PC

2		1	
FROM	TO	DESCRIPTION	COLOR
A1	D6	CABLE 28 AWG UL 1061 BLACK	BLACK
A2	D5	CABLE 28 AWG UL 1061 BLACK	BLACK
A3	D4	CABLE 28 AWG UL 1061 BLACK	BLACK
A4	D3	CABLE 28 AWG UL 1061 BLACK	BLACK
A5	D2	CABLE 28 AWG UL 1061 BLACK	BLACK
A6	D1	CABLE 28 AWG UL 1061 BLACK	BLACK


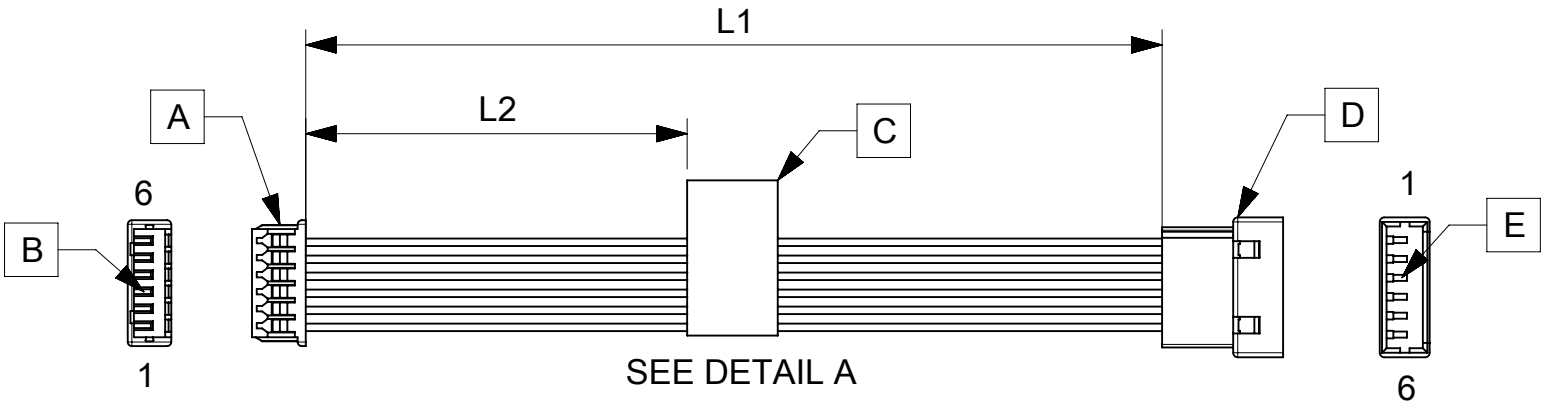


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2181130600	75±5	30	6 CIRCUIT PICOBLADE R:P CABLE 75MM
2181130601	150±6	70	6 CIRCUIT PICOBLADE R:P CABLE 150MM
2181130602	225±6	105	6 CIRCUIT PICOBLADE R:P CABLE 225MM
2181130603	300±8	145	6 CIRCUIT PICOBLADE R:P CABLE 300MM
2181130604	425±8	205	6 CIRCUIT PICOBLADE R:P CABLE 425MM



- NOTES
1. Cable assembly to be tested 100% for continuity and polarity.
 2. Connector view shown is from mating side.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in flag type on the cables.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
04/03/2021	A	INITIAL RELEASE	ARAJU
DOCUMENT STATUS	P1	RELEASE DATE	2021/03/26 04:03:47

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
	mm	NTS
	GENERAL TOLERANCES (UNLESS SPECIFIED)	
DIVISIONAL SYMBOLS	ANGULAR TOL	± °
	4 PLACES	±
	3 PLACES	±
	2 PLACES	±
DIVISIONAL SYMBOLS	1 PLACE	±
	0 PLACES	±
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION
	DRAWING	SERIES
A4-SIZE		218113
MATERIAL NUMBER		CUSTOMER
SEE TABLE		GENERAL MARKET
SHEET NUMBER		1 OF 1