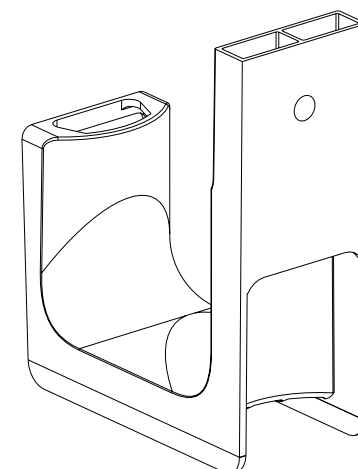
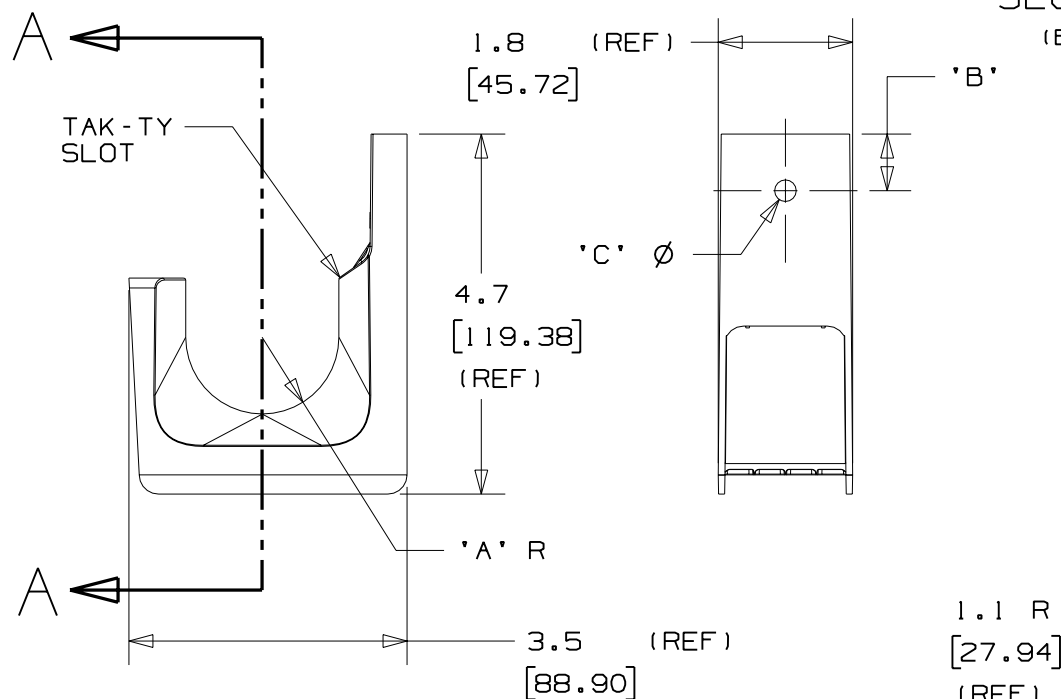


PANDUIT PART NO.	DIMENSIONS			WEIGHT lbs 10 (g) pcs
	'A'	'B'	'C'	
JP2W-___	1.0 (25.4) (REF)	0.73 (18.54)	0.27 (6.86)	1.27 (576.1)

SECTION A-A

(BEND RADIUS
CONTROL)

NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
- MATERIAL: NYLON 6/6
- PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM 2.0" (50.8) DIAMETER BUNDLE. RECOMMENDED MAXIMUM STATIC LOAD: 30 lbs.
- PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
- PRODUCT MARKINGS:
ULC logo and statement:
"SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE."
ULC logo and statement:
"IN ACCORDANCE WITH CAN/ULC S-102.2 IN SINGLE UNITS OR PAIRS, 4 ft (1220mm) MIN. SPACING, FSR=0, SDC=20."

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS

G02888FJ_PB_JP2W_02

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

J-PRO J-HOOK
WALL MOUNT (JP2W-___)UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)
(.XX) ±0.02 (0.5) ANGLES ±5°

UNLESS OTHERWISE SPECIFIED,

ALL DIMENSIONS ARE GIVEN

IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY JAD

MAT'L:

SCALE NONE

DATE 4/7/04

SEE NOTE 2

DRAWING NO.

GB2888FJ

DWG
A
SIZE

2	8/29/05	JAD		COMPLETELY REVISED, RE-RELEASE WITH NEW GEOMETRY	GB2888FJ	2			
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	