

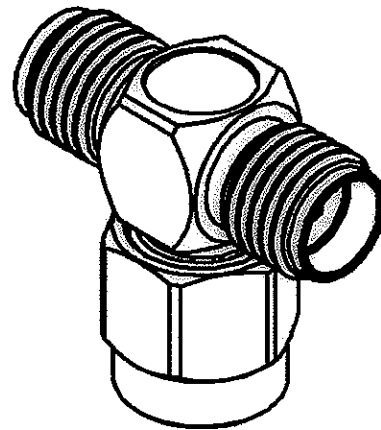


TEE FEMALE- FEMALE - MALE ADAPTOR
R125.780.001

Series : SMA

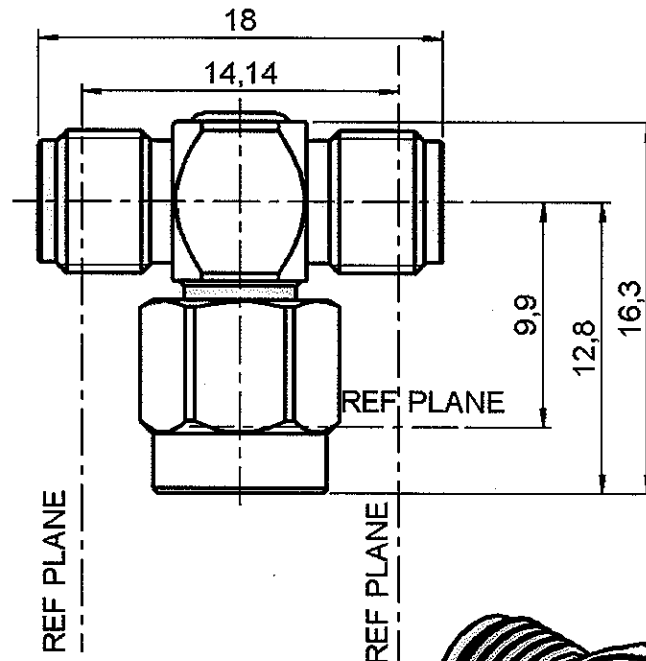

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING
BODY	STAINLESS STEEL	PASSIVATED . μm
CENTRE CONTACT	BRASS	GOLD 1.3 OVER NICKEL 2 μm
OUTER CONTACT	-	- μm
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	STAINLESS STEEL	PASSIVATED . μm
-	-	-
-	-	-



TEE FEMALE- FEMALE - MALE ADAPTOR**R125.780.001**

Series : SMA

ELECTRICAL CHARACTERISTICS

Impedance		50 Ω
Frequency		0-18 GHz
VSWR	NA +	0.000 x F(GHz) Maxi
Insertion loss		0.07 $\sqrt{F}$(GHz) dB Maxi
RF leakage	- (	100 - F(GHz)) dB mini
Voltage rating		500 Veff Maxi
Dielectric withstanding voltage		1000 Veff mini
Insulation resistance		5000 MΩ mini

SPECIFICATION**ENVIRONMENTAL**

Operating temperature	-65/+165 °C
Hermetic seal	NA Atm.cm3/s
Leakage – pressurised only	NA Mpa

OTHERS CHARACTERISTICSAssembly instruction **NA**Others :
-**MECHANICAL CHARACTERISTICS**

Centre contact retention		
Axial force – Mating end	27 N mini	
Axial force – Opposite end	27 N mini	
Torque	2.8 N.cm mini	
Recommended torque		
Mating	NA N.cm	
Panel nut	NA N.cm	
Mating life	500 Cycles mini	
Weight	0.000 g	

**RADIALL®**