


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/17/14	
A		REVISED SHAPE	6/26/14	AY/SY
B		UPDATE SPEC.	7/30/18	AY/RC1

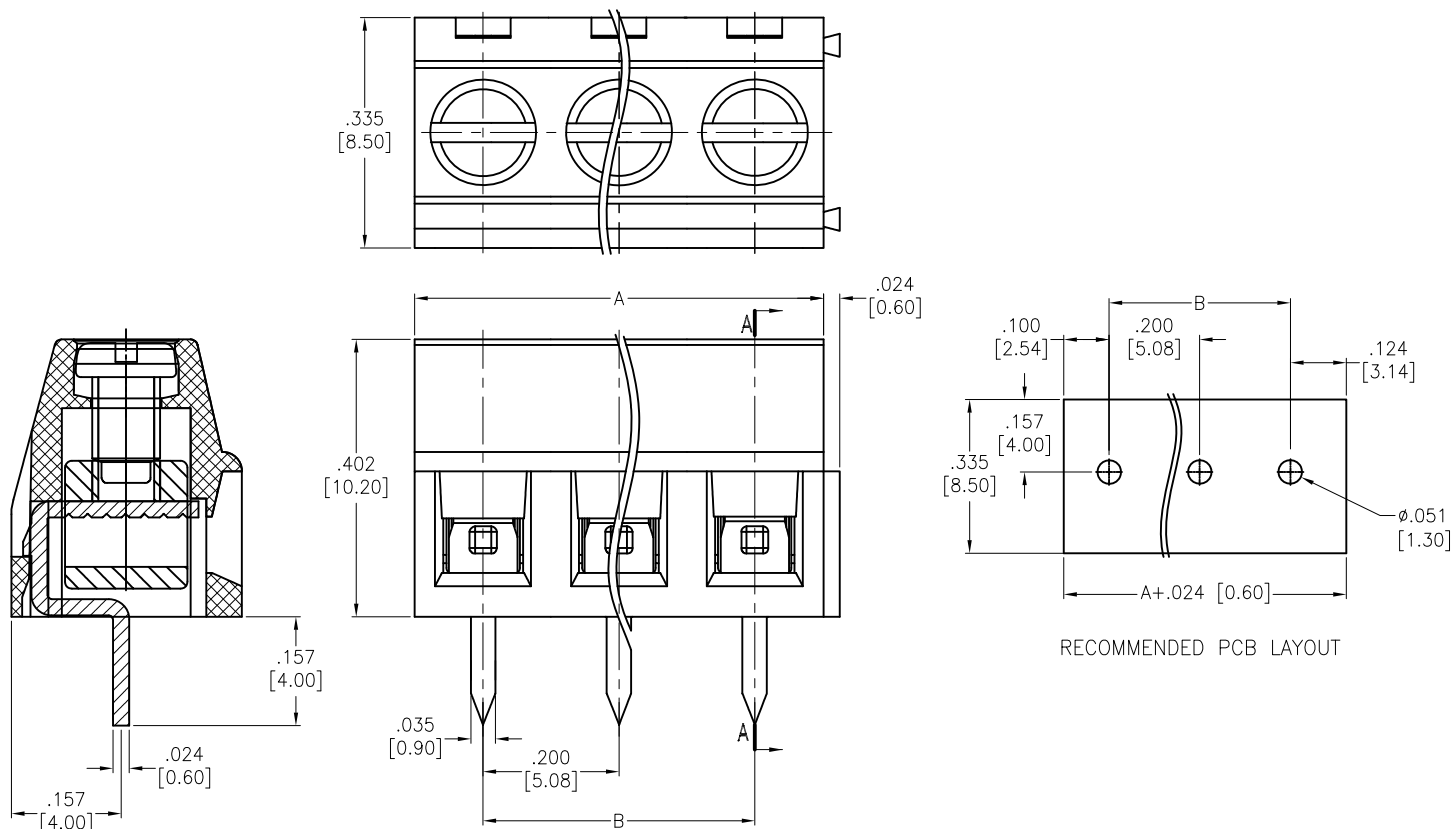

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Screw: M2.5, Steel, Zinc plated.

Contact: Brass, Tin plated.

Cage: Brass, Nickel plated.

Electrical:

Voltage rating: 300V

Current rating: 8A

Contact Resistance: 20 mohms max.

Insulation resistance: 500 Mohms min @DC 500V

Dielectric withstanding voltage: 2000 VAC for 1 minut

Mechanical:

Torque: 0.4Nm(3.6lb-in)

Wire Range: 26-16 AWG 1.5mm²

Wire strip length: 5~6mm

Environmental:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Poles: 2 thru 24

A = .200 [5.08] X No. of Positions

B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	1/17/14
CHECKED	SY	1/17/14
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
EURO BLOCK, .200 [5.08] PITCH			
SIZE	PART NO.	REV.	
X	EB21A-XX-D	B	
REF:	S00067C	SCALE:	NTS
SHEET 1 OF 1			