

## Han 3HvE-gs-M20

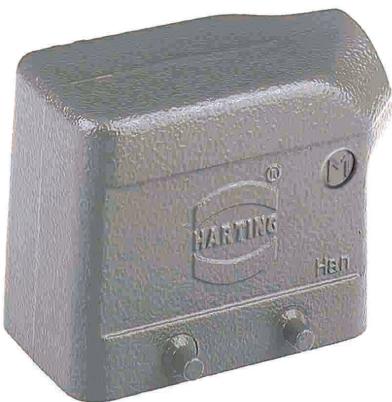


Image is for illustration purposes only. Please refer to product description.

### Identification

Category	Hoods/Housings
Series of hoods/housings	Han Hv E®
Type of hood/housing	Hood
Type	Low construction

### Version

Size	10 B
Version	Side entry
Cable entry	1x M20
Locking type	Double locking lever
Field of application	Special hoods/housings for Han Hv E® screw terminal

### Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4 4X 12

### Material properties

Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
RoHS	compliant

## Material properties

ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes

## Specifications and approvals

Approvals	DNV GL
CE	Yes

## Commercial data

Packaging size	1
Net weight	143.7 g
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440202 Shell for industrial connectors