

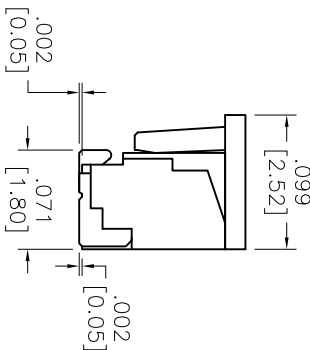
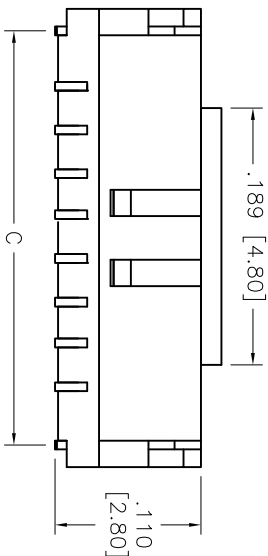
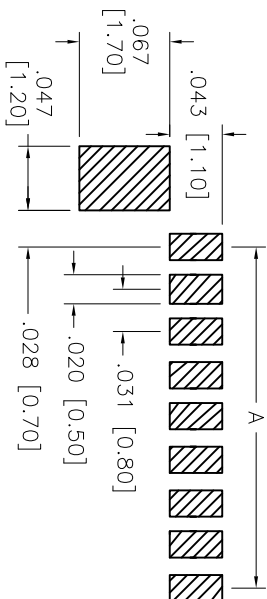


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/17/15	
A		REVISED SPEC.	9/17/15	AY/MMW

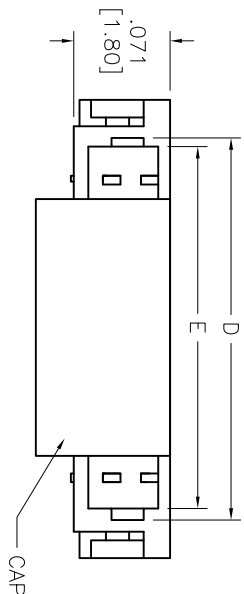

RECOMMENDED PCB LAYOUT

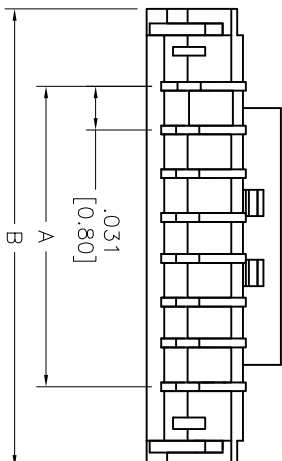

SPECIFICATIONS:

Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Natural
Contacts: Lin Copper
Plating: Tin plated over Copper underplate overall
Electrical: Voltage rating: 30 V AC/DC
Current rating: 0.5 A AC/DC (32 Awg wire)
0.2 A AC/DC (36 Awg wire)
Contact resistance: 0.02 ohms max
Insulation resistance: 50 MΩ min
Dielectric withstanding voltage: 200 VAC for 1 minute
Temperature Rating: Operating temperature: -25°C to +85°C
Environmental: Lead free, RoHS compliant

PACKAGED ON TAPE & REEL

Positions: 02 thru 30

A = .031 [0.80] x No. of Spaces
B = .031 [0.80] x No. of Spaces + .118 [3.00]
C = .031 [0.80] x No. of Spaces + .087 [2.20]
D = .031 [0.80] x No. of Spaces + .063 [1.60]
E = .031 [0.80] x No. of Spaces + .047 [1.20]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.031 [0.80] PITCH HEADER, STRAIGHT TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	HR		4/17/15				
CHECKED	MW		4/17/15				
APPROVED							
				SIZE	PART NO.	REV.	
				X	08SH-A-XX-TS-SMT-PP-T/R	A	
REF: S00015T				SCALE: NTS	SHEET 1 OF 1		

ROHS
COMPLIANT