

E14
Z14



e-chain system® E-Z chain Series E14/Z14



Price Index



Series E14/Z14

Special Features / Options



IPA Qualification Certificate
Air Cleanliness Class ISO Class 2
(at v = 3.28 ft/s) upon request




Flammability Class
VDE 0304 IIC UL94 V2



IPA Qualification Certificate: ESD
Classification Level 1 (for Series
E14-3-038). Special equipment:
Electrically conductive ESD/ATEX
version upon request

Assembly Tips

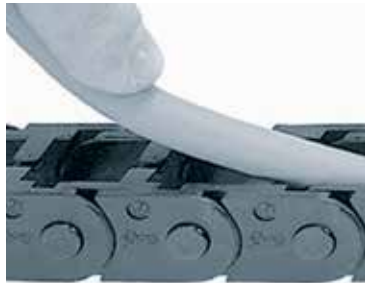

Just push the cables into the e-chain
using your thumb

Usage Guidelines



- If filling is required without opening and closing
- If price is an issue
- If quiet operation is required



- "Z" Series is unsuitable for gliding applications
 - Series B15 E2 Mini
- If a long unsupported length is required
 - Series B15 E2 Mini

Features & Benefits

- 1 Small pitch for low-noise and smooth operation
- 2 Cable-friendly interior
- 3 Limited torsion tolerance
- 4 Very easy to fill
- 5 Integrated strain relief option
- 6 Patented push button design holds the links together
- 7 "E" Series features split crossbar along the outer radius
- 8 "Z" Series features split crossbar along the inner radius



Order Example: Complete e-chain®

Please indicate chain length or number of links. Example:

3.28 ft (1 m) E14-3-038-0



e-chain®

1 Set 114-3-12PZ



Mounting Bracket




e-chain system® E-Z chain

Series E14/Z14

Installation Dimensions

Short travel, unsupported length

- FL_B = unsupported with permitted sag
 - FL_G = unsupported with straight upper run
- Further information ► Design, Chapter 1

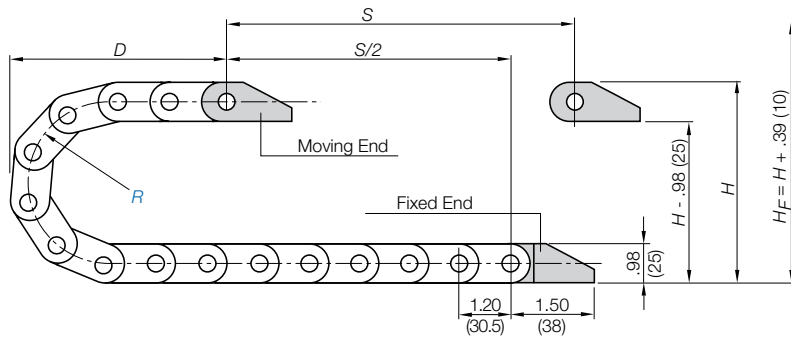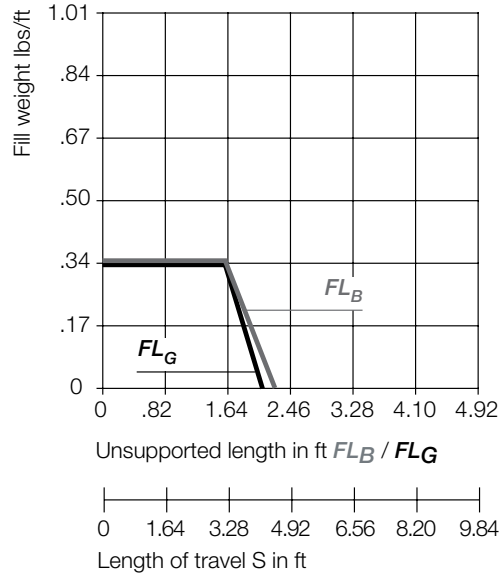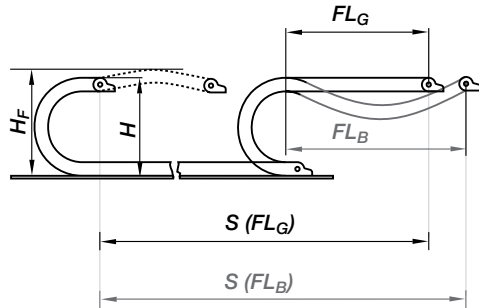

Pitch per link: = 1.20" (30.5 mm)
 Links per ft (m): = 10.06 (33)
 For center mount applications:
 Chain length = $\frac{S}{2} + K$

The required clearance height: $H_F = H + .39$ in. (10 mm) (with .13 lbs/ft (0.2 kg/m) fill weight).
 Please consult igus® if space is particularly restricted.

R	1.10 (028)	1.50 (038)	1.89 (048)	2.95 (075)	3.94 (100)	4.92 (125)
H	3.19 (81)	3.98 (101)	4.76 (121)	6.89 (175)	8.86 (225)	10.83 (275)
D	3.35 (86)	3.78 (96)	4.17 (106)	5.24 (133)	6.22 (158)	7.20 (183)
K	5.91 (150)	7.28 (185)	8.46 (215)	11.81 (300)	14.96 (380)	17.91 (455)

igus®

E14
Z14



Short Travels - Unsupported



Unsupported E-Chains® feature positive camber over short travels. This must be accounted for when specifying the clearance height. Please refer to **Installation dimensions** for further details.

Legend

- S = Length of travel
- R = Bending radius
- H = Nominal clearance height
- D = Overlength e-chain® radius in final position
- $K = \pi \cdot R + \text{safety buffer}$
- H_F = Required clearance height

PDF: igus.com/e-chain-pdfs
 Product information: igus.com/e-chains



Speed / acceleration FL_G	max. 65.6 ft/s (20 m/s) / max. 656 ft/s² (200 m/s²)
Speed / acceleration FL_B	max. 9.84 ft/s (3 m/s) / max. 19.69 ft/s² (6 m/s²)
Gliding speed / acceleration (maximum)	max. 9.84 ft/s (3 m/s) / max. 32.8 ft/s² (10 m/s²)
Material (e-chain®) - permitted temperature	igumid NB / -40°F (-40°C) up to +176°F (+80°C)
Material (mounting brackets)* - permitted temperature	igumid G / -40°F (-40°C) up to +248°F (+120°C)
Flammability Class (e-chain®), igumid NB	VDE 0304 IIC UL94 V2
Flammability Class (mounting brackets), igumid G*	VDE 0304 IIC UL94 HB

*Available in igumid NB upon request, please consult igus® for delivery time

Technical Data



Details of material properties

► Chapter 1

E14
Z14




e-chain system® E-Z chain Series E14/Z14

igus®
e-chain system®

Telephone 1-800-521-2747

Series E14 - Split crossbar along the outer radius




Part Number Structure

E14- 3- 038- 0

Color - Black
Bending radius
Width
Series


Series Z14 - Split crossbar along the inner radius



Part Number Structure

Z14- 3- 038- 0

Color - Black
Bending radius
Width
Series

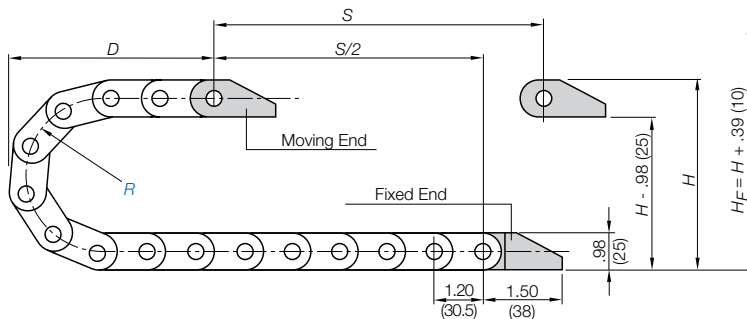

Supplement part number with required radius. Example: E14-3-038-0

Pitch: 1.20 in. (30.5 mm) per link links/ft (m) = 10.06 (33)

Part Number

Split Crossbar Outer Radius	Split Crossbar Inner Radius			Bi in. (mm)	Ba in. (mm)	Weight lbs/ft (kg/m)
E14-1-	Z14-1-		-0	.59 (15)	1.06 (27)	≈ 0.21 (0.31)
E14-2-	Z14-2-		-0	.98 (25)	1.46 (37)	≈ 0.22 (0.32)
E14-3-	Z14-3-		-0	1.50 (38)	1.97 (50)	≈ 0.27 (0.40)
E14-4-	Z14-4-		-0	1.97 (50)	2.44 (62)	≈ 0.30 (0.44)

Choose from the radii below for all of the above sizes
Radius (mm) Example: E14-3-038-0

	028	038	048	075	100	125
R	1.10 (028)	1.50 (038)	1.89 (048)	2.95 (075)	3.94 (100)	4.92 (125)
H	3.19 (81)	3.98 (101)	4.76 (121)	6.89 (175)	8.86 (225)	10.83 (275)
D	3.35 (86)	3.78 (96)	4.17 (106)	5.24 (133)	6.22 (158)	7.20 (183)
K	5.91 (150)	7.28 (185)	8.46 (215)	11.81 (300)	14.96 (380)	17.91 (455)

0=Standard color black. For other colors see Chapter 1

Internet: igus.com
email: sales@igus.com
QuickSpec: igus.com/quickspec

e-chain system® E-Z chain

Series E14/Z14

Mounting Brackets





E14
Z14



Plastic, one-piece

- One-piece mounting bracket
- Corrosion resistant
- Available preassembled
- Inner and outer attachment possible
- Available with or without strain relief tiewrap plates




Possible installation configurations -


Dimensions and order configurations

Strain relief is possible on the moving end and/or the fixed end.

Part Number Structure



- With assembled strain relief tiewrap plates
- Without assembled strain relief tiewrap plates
- Complete Set
- Width
- Mounting brackets for selected chain type

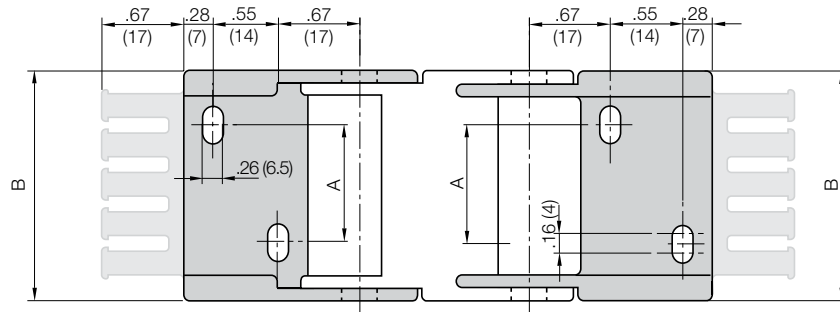

Full set, for both ends:

114- 20- 12 PZ

Full set, each part with pin/bore + tiewrap plate

Single-part order:

114- 20- 1 PZ

Mounting bracket with bore + tiewrap plate

114- 20- 2 PZ

Mounting bracket with pin + tiewrap plate

Chain Type	Part No. Full set with Tiewrap Plate	Part No. Full Set without Tiewrap Plate	Dimension A in. (mm)	Dimensions B in. (mm)	Number of Teeth
E14/Z14-1	114-1-12PZ	114-1-12P	— —	1.04 (26.3)	2
E14/Z14-2	114-2-12PZ	114-2-12P	.39 (10)	1.43 (36.3)	3
E14/Z14-3	114-3-12PZ	114-3-12P	.91 (23)	1.94 (49.3)	4
E14/Z14-4	114-4-12PZ	114-4-12P	1.38 (35)	2.41 (61.3)	5

Additional Accessories



Quickfix - mounting bracket
with dowel, upon request

Part No.
114-3-12QZ

PDF: igus.com/e-chain-pdfs
Product information: igus.com/e-chains

