
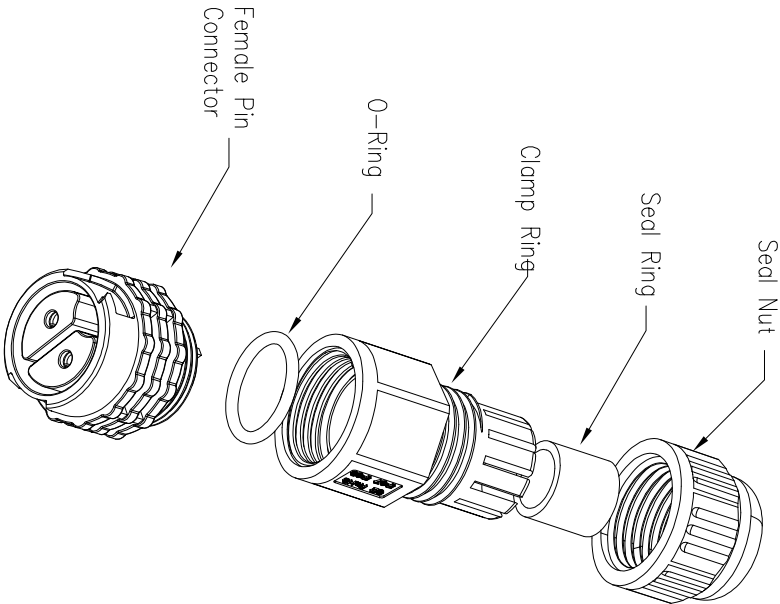

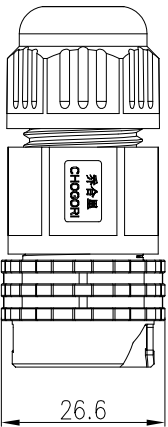


REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13

59.7 (Ref)

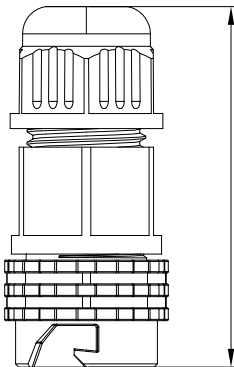

Specification:



- 1.Operation Temperature: -45°C~105°C.
- 2.Insulation Resistance:100MΩ at DC500V.
- 3.Contact Resistance:<10mΩ.
- 4.Withstand Voltage: 2000V AC
- 5.Operating Current:20A
- 6.Operating Voltage:AC 300V
- 7.Waterproof Rate:IP67 (Mated)
- 8.Seal Nut:Nylon, Black
- 9.Seal Ring:Silicon, Black.
- 10.Clamp Ring:Nylon, Black
- 11.O-Ring:Silicon, Red
- 12.Female Pin: Copper Alloy, Gold Plated
- 13.Connector:Nylon+GF, Black
- 14.RoHS Compliant.
- 15.Ul Compliant.
- 16.Mating Cap: 806-00068-00

24XXX431-XX Cable Range OD

01 OD: φ3.5mm~φ6.8mm

02 OD: φ6.8mm~φ10.5mm

Pin Number



2 Pin

3 Pin

P/N: 24002431-02

P/N: 24003431-02

Pin Assignments Front View



DESCRIPTION

Large Series Push Lock
Female Plug With Female Pin

TOLERANCE
.X
.XX
.XXX
ANGLES
±1°

SCALE
1:1
REV C1
SIZE A4
SHEET 1 OF 1
* : Inspection Item

CHOGORI®

PART NO
24XXX431-XX

DRAWN BY
Liu

DATE
2019/08/13

DWG NO

CHECKED BY
Mo

DATE
2019/08/13

CUSTOMER

APPROVED BY
Panson

DATE
2019/08/13