

PIN	COLOR
1	WHITE
2	BROWN
3	GREEN
4	YELLOW
5	GRAY
6	PINK
7	BLUE
8	RED
9	BLACK
10	VOILET
11	GRAY/PINK
12	RED/BLUE

TABLE 1

DOCUMENT STATUS	P1	RELEASE DATE	2022/02/15	13:53:24
-----------------	----	--------------	------------	----------

FORMAT: master-tb-prod-A3
REVISION: J
DATE: 2020/01/14

W

W0 =
ULTRA LOCK
SINGLE ENDED

0

POLES:
C = 12 POLES

0

HEADER:
007 = MALE RIGHT ANGLE

0

	X
--	---

CABLE:
H45 = PUR BLACK

☒

X

UNIT:
M = METER


M

LENGTH EXAMPLE.
020 = 2 m
050 = 5 m
200 = 20 m

☒☒

COUPLING NUT
MATERIAL :
BLANK = STANDARD
1- STAINLESS STEEL
5-DELTRIN
7-TEFLON COATED
H-2 PIECES OF I/D CARRIER

MOLDING COLOR:
BLANK = PUR (STANDARD)
A = GRAY
Y = YELLOW PUR

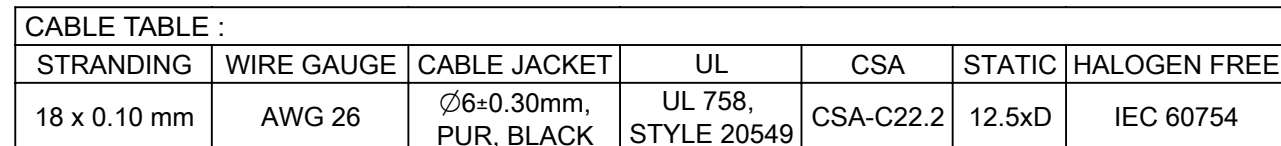

ELECTRICAL DATA :
VOLTAGE RATING : 30V
AMPERAGE RATING : 1.5A
IP PROTECTION : IP67

CONDUCTOR :
MATERIAL : BARE COPPER
SECTION : 26 AWG
STRANDING : 18x0.10 mm

COMPOUND : PP
DIAMETER : $\varnothing 1 \pm 0.10$ mm

COMPOUND : PUR
COLOR : BLACK
DIAMETER : $\varnothing 6 \pm 0.30$ mm

HALOGEN FREE : IEC 60754

4	1	ULTRALOCK ASSEMBLY	SEE PART LIST	SEE PART LIST
3	-	MOULDING	SEE MATRIX	SEE MATRIX
2	12	M12 M Contact-12pol	BRASS	GOLD OVER Ni-PLATED
1	-	CABLE	PUR	BLACK
ITEM	QTY	DESCRIPTION	MATERIAL	FINISH

A