

Han PP PFT plastic rect. crimp power



Image is for illustration purposes only. Please refer to product description.

Part number	09 35 231 0331
Specification	Han PP PFT plastic rect. crimp power
HARTING eCatalogue	https://b2b.harting.com/09352310331

Identification

Category	Connectors
Series	Han [®] PushPull (V14)
Identification	Power
Element	Panel feed trough set
Features	Intuitive locking mechanism

Version

Termination method	Crimp termination
Shielding	Unshielded
Number of contacts	5
Locking type	PushPull
Pack contents	incl. bulkhead mounted housing and male insert Without contacts

Technical characteristics

Conductor cross-section	0.25 ... 2.5 mm ²
Conductor cross-section	AWG 22 ... AWG 12
Rated current	16 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Limiting temperature	-40 ... +70 °C



Pushing Performance
Since 1945

Technical characteristics

Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65 IP67
Vibration resistance	5-150 Hz, 5 g, 0.35 mm, 2h/axis
Shock resistance	5 g / 30 ms, 3 shocks / axis and direction

Material properties

Surface (contacts)	Silver plated
Material (hood/housing)	Thermoplastic
Colour (hood/housing)	Black
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Naphthalene

Specifications and approvals

Specifications	IEC 61076-3-118 EN 45545-2
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076


Commercial data

Packaging size	1
Net weight	10.22 g
Country of origin	Germany
European customs tariff number	85366990
GTIN	5713140054165
eCl@ss	27440101 Rectangular connectors (set)

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

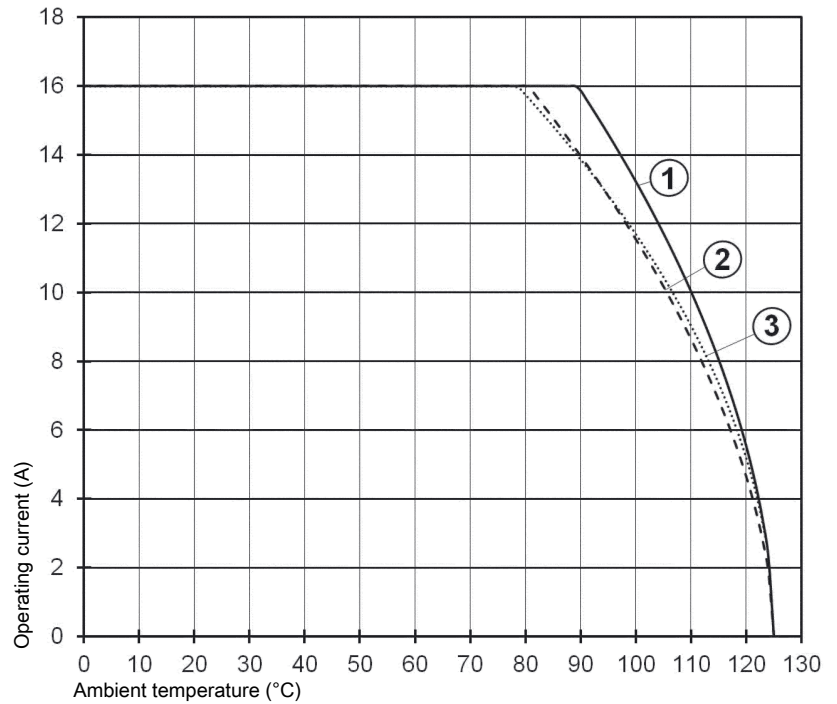

- ① Crimp termination
 - ② Han-Quick Lock[®] termination
 - ③ Solder termination
- Conductor cross-section 2.5 mm²

Mating face

