


B

A

B

A


DATE	REV	ECN	APP'D. BY
10/15/19	A0	RELEASED	ADB
-	-	-	-

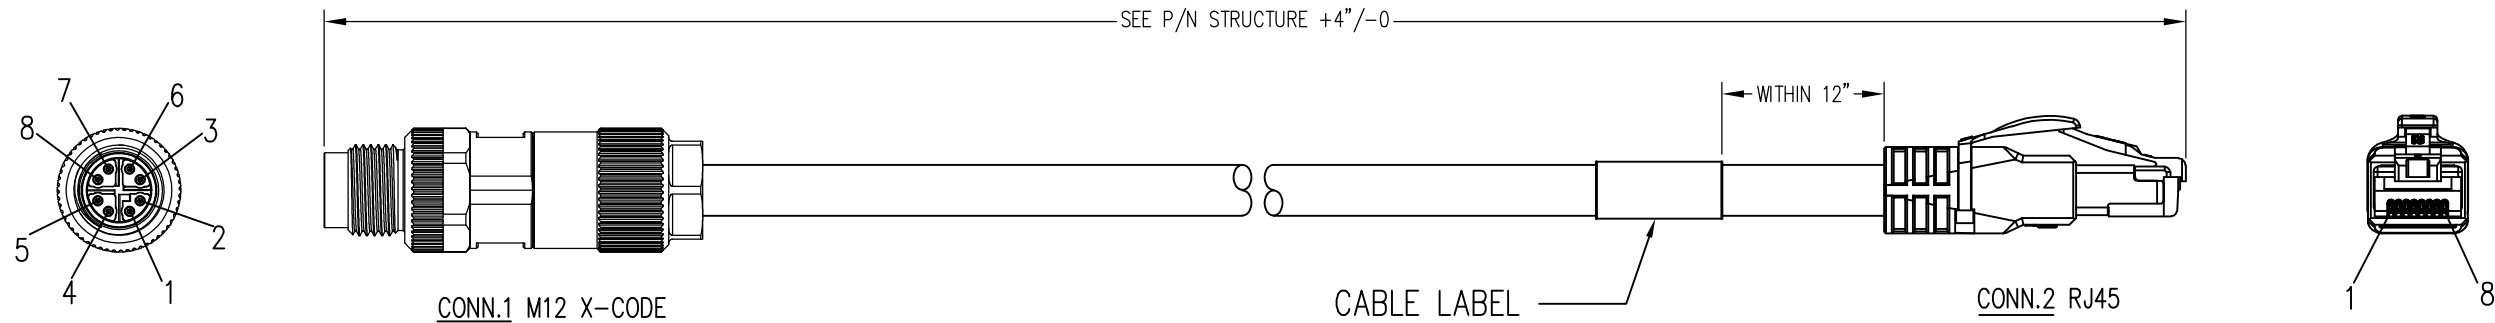

NOTES:

- M12 CONNECTOR COMPONENTS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACTS: COPPER ALLOY
SHELL: COPPER ALLOYS AND ZINC ALLOY
SEALING: NBR
CONTACT PLATING: UNDERPLATE: 50u"~70u" NICKEL
CONTACT AREA: 10u" GOLD
RJ45 CONNECTOR COMPONENTS:
HOUSING: CLEAR POLYCARBONATE
CONTACTS: COPPER ALLOY
STRAIN RELIEF OVERMOLD: PVC
SHIELD: NICKEL PLATED BRASS
CONTACT PLATING: UNDERPLATE: 100u" NICKEL
PLATING: 2u" GOLD FLASH
CONTACT AREA: 50u" GOLD
CABLE CONSTRUCTION:
STRANDED, TIN PLATED COPPER
4PR, SF/UTP, TYPE CMX
TPE JACKET
- ELECTRICAL TESTING:
100% TRANSMISSION TESTED FOR PERFORMANCE
- PACKAGING:
ONE CABLE PER BAG

PIN ASSIGNMENT


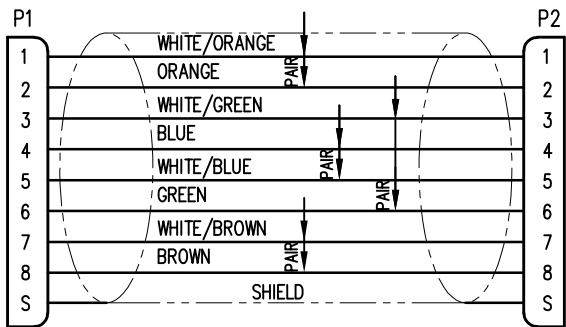


568B STANDARD WIRING MAP

Part Numbers Reference Table	
LENGTH	Part Number
3 FT	BM-MYRM003F
7 FT	BM-MYRM007F
15 FT	BM-MYRM015F
30 FT	BM-MYRM030F

P/N STRUCTURE:

BM-MYRMxxxF

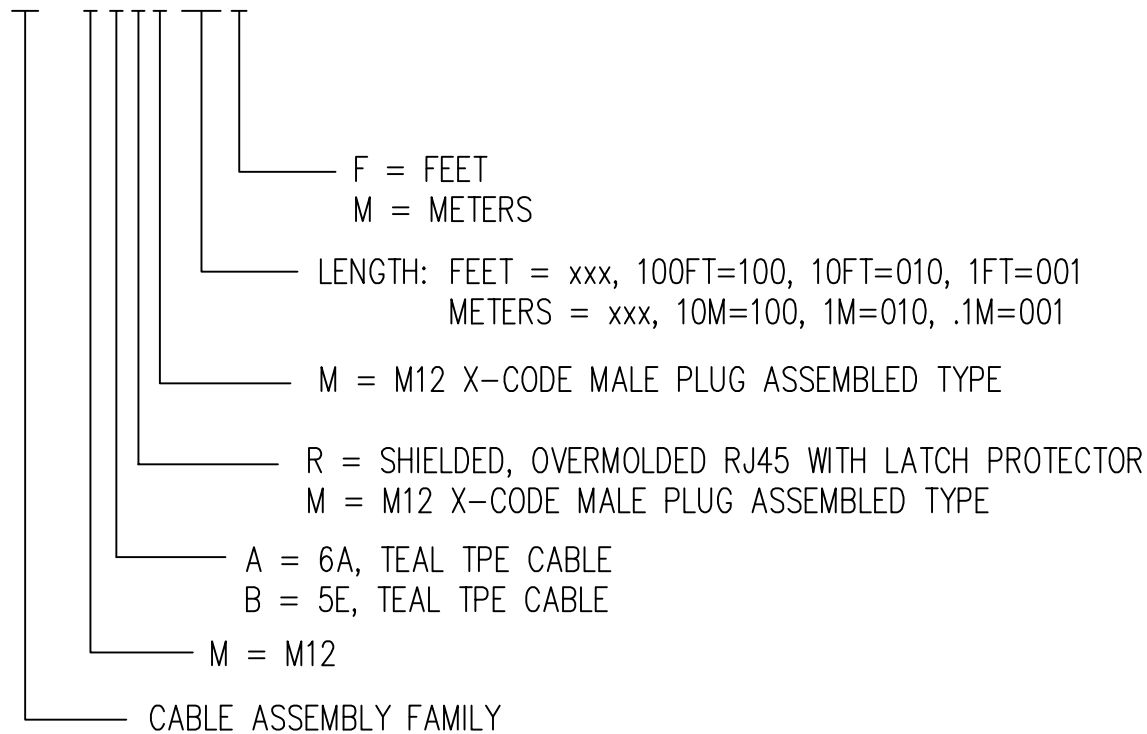

DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE
DIMENSIONS: INCHES [METRIC]
UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ±.005 [0.13]
ANGLES ARE ± 1°
SHEET NO. 1 OF 1



TITLE: M12 X-CODE MALE TO RJ45 MALE

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.

206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
<http://www.belfuse.com>

DRN BY: JMM	DATE 09/18/19
APPD BY: ADB	DATE 10/15/19
DWG NO. CT999201	REV. A0