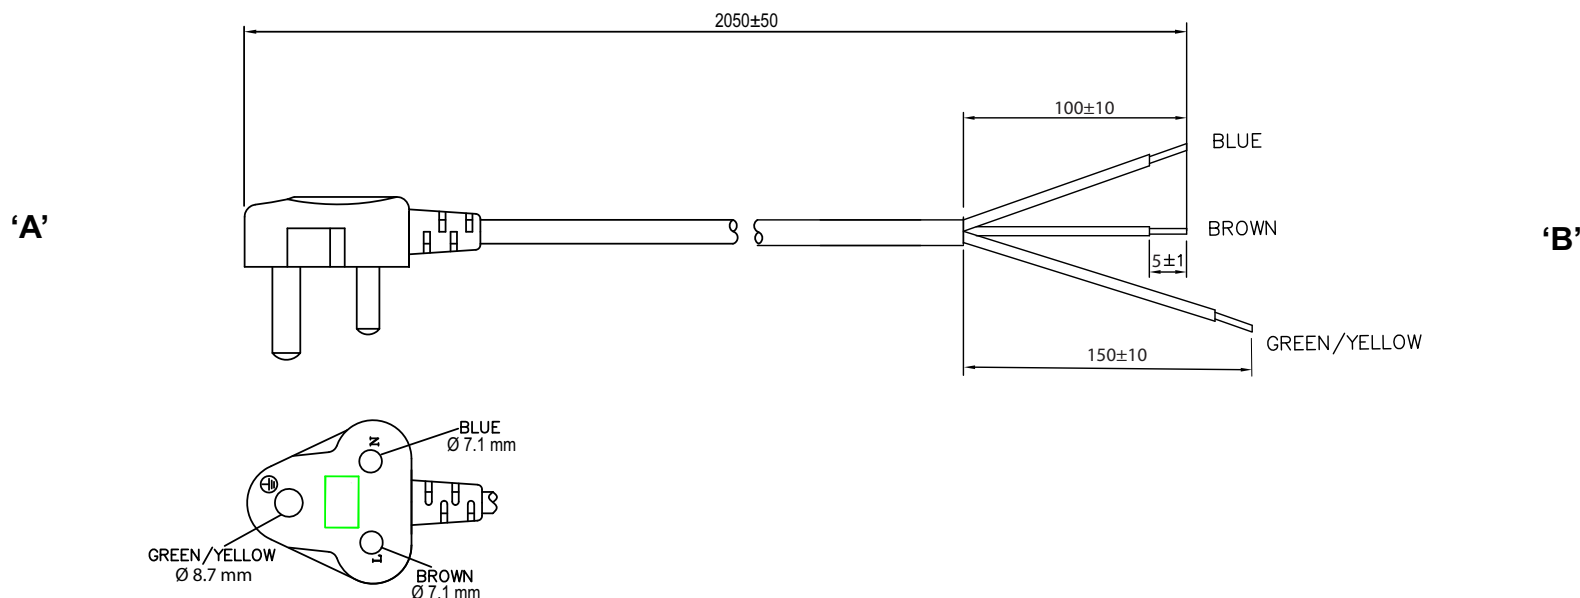


PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/17/18	BS
B	UPDATE END "B" TO STRIP&TIN, RFS.27261	01/23/19	BS


GENERAL SPECIFICATIONS:

RATING: 6A / 250V AC
 CABLE TYPE / SIZE: H05VV-F, 3 x 0.75 mm²
 TEMPERATURE RATING: 70° C
 CONDUCTOR COLORS: BLUE / BROWN / GREEN-YELLOW
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 2050 ± 50 mm
 CABLE OUTER DIAMETER: 6.3 ± 0.1 mm
 END 'A' TERMINATION: INDIA/SOUTH AFRICAN TYPE PLUG (15A), 2 POLE + GROUND
 RIGHT ANGLE STYLE (BS546/IA6A3/SANS164)
 END 'B' TERMINATION: STRIP&TIN

PACKING:
 BULK PACK

RELEASED

By N.Frost at 9:01 am, Jan 24, 2019



DASH NO.	PART NO	REV.	DESCRIPTION		NOTES	
TABULATION BLOCK						
		TOLERANCES:		 GlobTek®, Inc. www.globtek.com	186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111	
		DECIMALS	ANGULAR			
		.xx +/- 0.1 .xxx +/- .005	+/- 1°			
INIT.BY: BS	DATE: 09/17/18	MILLIMETERS	ANGULAR	DWG TITLE: SOUTH AFRICAN DETACHABLE CORDSET		
		.xx +/- 0.3 .xxx +/- .013	+/- 1°			
DRAWN: NF	DATE: 09/17/18	FSCN No.: G, CC	SIZE A	MODEL: N / A		REV. B
APRVD: BS	DATE: 09/17/18	SCALE: NONE		PART NO: 2054262M000		SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice