



Connector Location A

Connector Location B

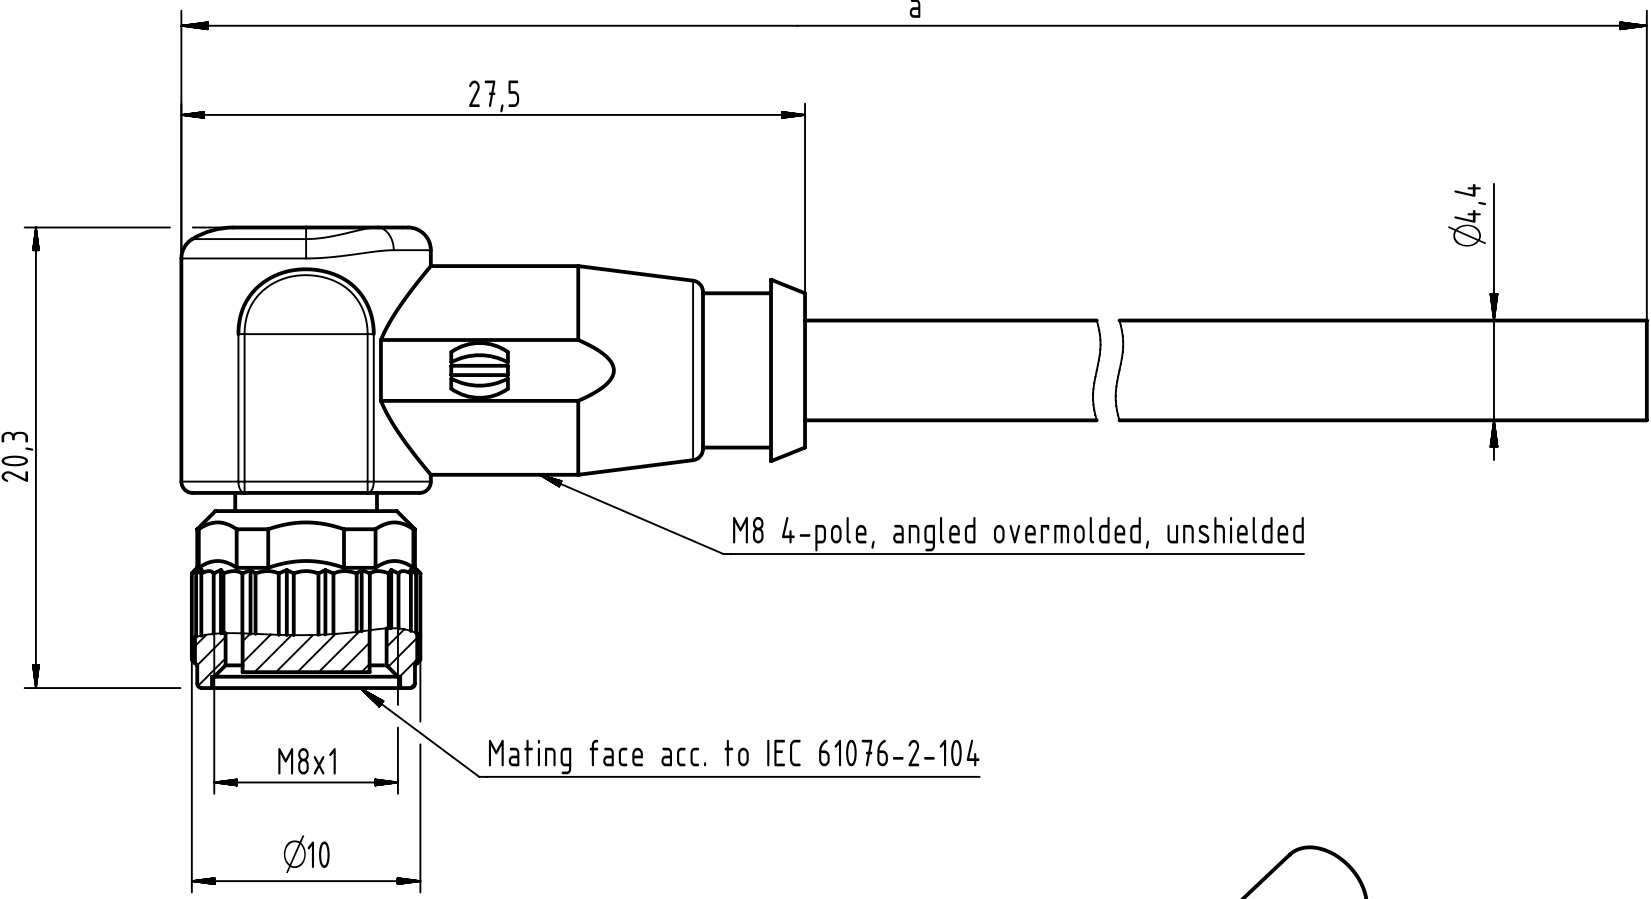


X
female



Loading-Plan

- 1 brown
- 2 white
- 3 blue
- 4 black

- Protection level: IP67
- Temperature range: -25°C ... +80°C

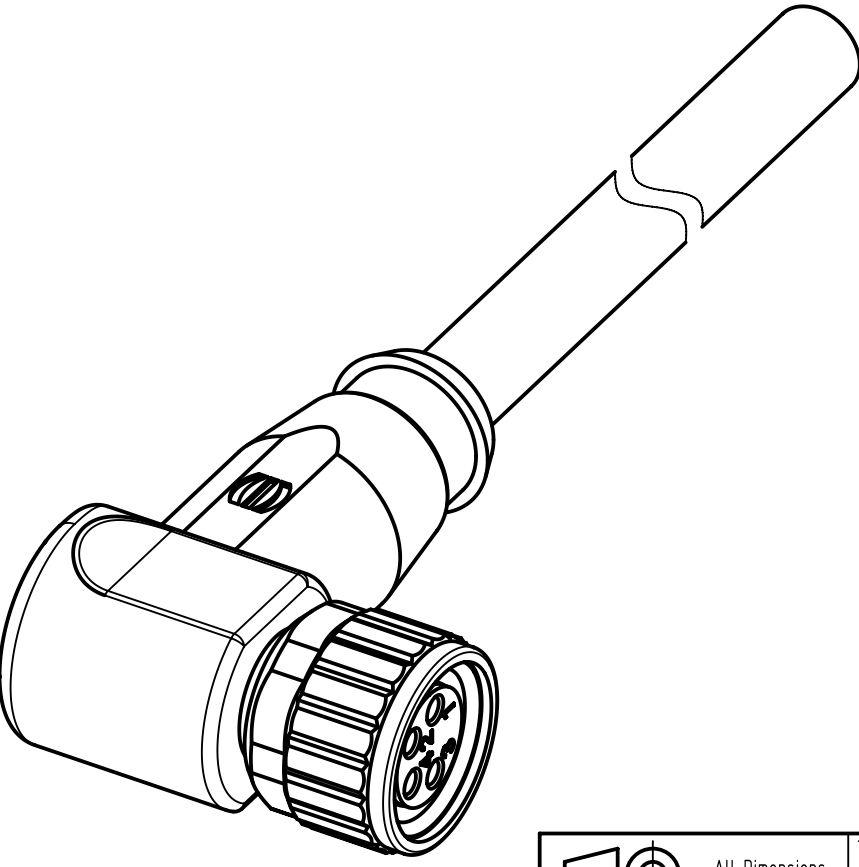

4.0 to 4.0	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	40	XXX=400
	39	XXX=390
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

PUR black, 4x0.25mm ²	21348300489XXX
Type of cable	Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved	Created by STOCHECIC Stochei	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2019-01-11	State Final Release	
	Department HCS - RO	Title M8 Cable Assembly 4-poles an/- f/-				Doc-Key / ECM-Nr. 100809803/UGD/009/A 500000145294	
HARTING Customised Solutions D-32339 Espelkamp		Type TB	Number 21348300489XXX			Rev. A	Page 1/1