

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/6/20	

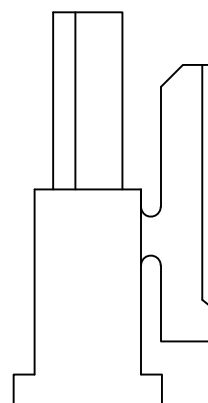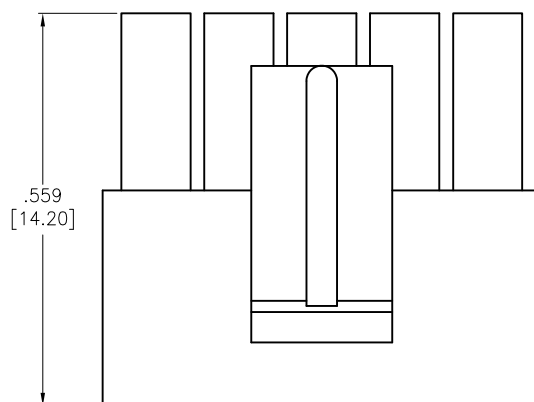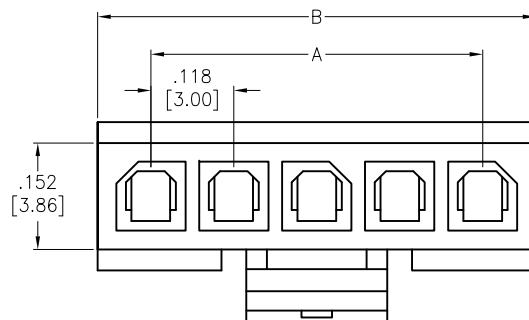

SPECIFICATIONS:

Material:

Insulator: Glass-Filled Polyimide, rated UL 94V-0

Insulator color: Black

Electrical:

Voltage rating: 250 V AC/DC

Current rating: 5 A AC/DC

Contact resistance: 10 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1500 VAC for 1 minute

Environmental:

Lead free, RoHS compliant



Positions: 02 thru 24

A= .118 [3.00] x No. of Space

B= .118 [3.00] x No. of Space + .157 [4.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010				ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710					
APPROVALS		DATE		TITLE							
DRAWN		LH		3/6/20		.118" [3.00mm] CRIMP HOUSING, SINGLE ROW					
CHECKED		AY1		3/6/20		LATCHING TYPE, HALOGEN-FREE					
APPROVED						SIZE		PART NO.		REV.	
						X		DMT-D-1-XX		-	
						REF:		S00015T		SCALE: NTS	
										SHEET 1 OF 1	