

MICRO SWITCHFREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL INC.
FED. MFG. CODE 91929**SWITCH - BASIC**

CATALOG LISTING

V3-3057**CK-X3557**

REPLACES X83370-V3

RELEASE NO. PR-14328

V3-3057**M**DRAWING
NUMBERISSUE
X2

REVISIONS

A CO 74212

D H D
20 JAN 93

CHECK

CHECK

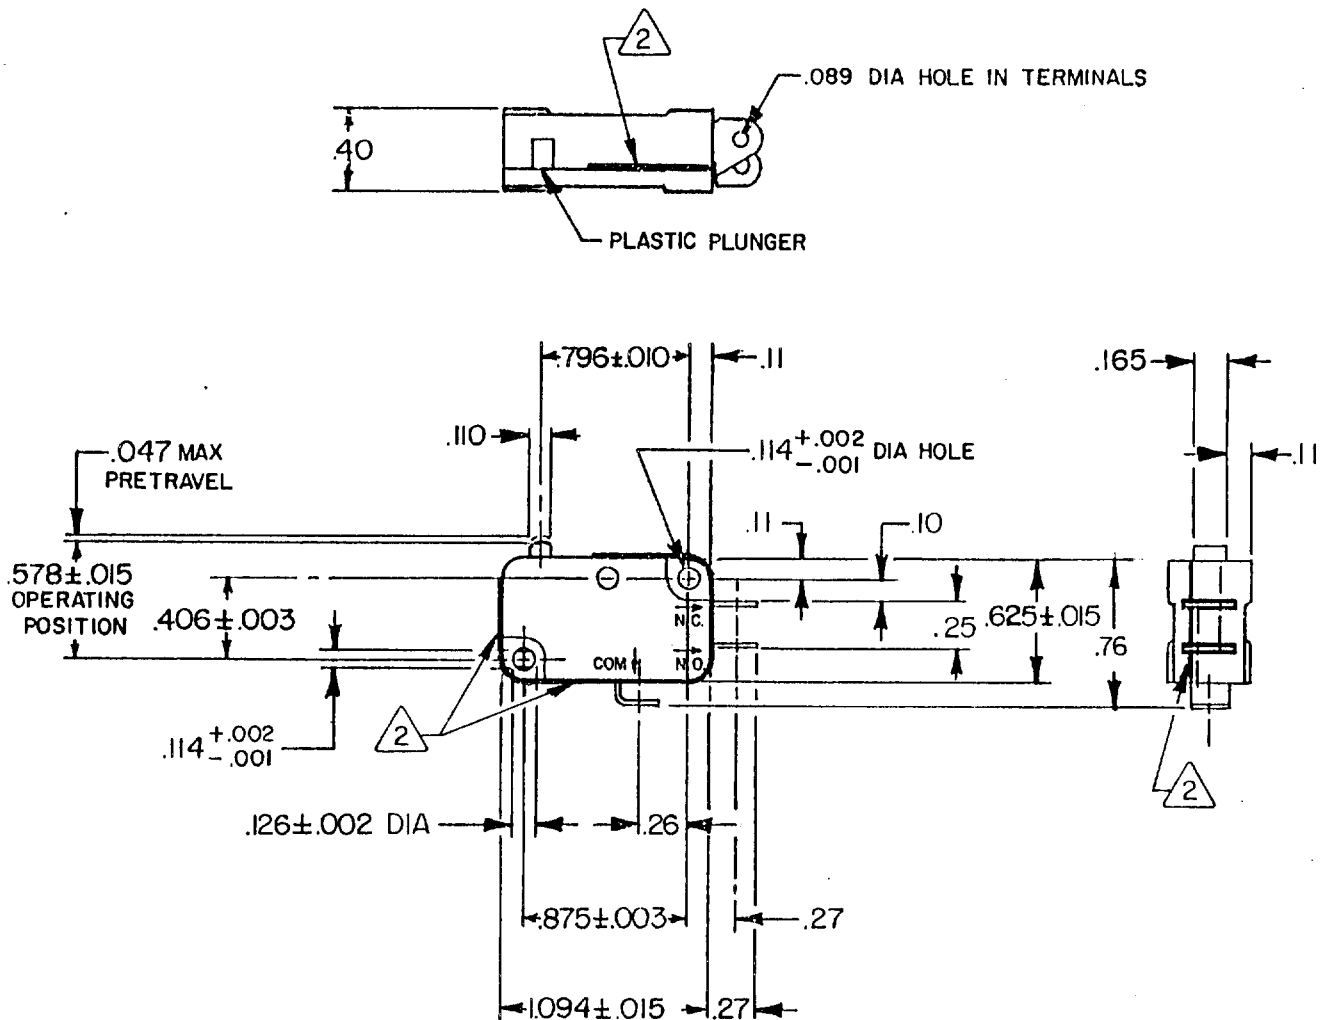
CHECK

CHECK

CHECK

CHECK

CHECK




NOTES

- 1 - TERMINALS ARE PLATED FOR SOLDERING
- 2 - EPOXY APPLIED AROUND TERMINAL AREA AND JOINT BETWEEN CASE AND COVER. EPOXY ON TOP OF THE SWITCH TO BE WIPED OFF FLUSH WITH CASE & COVER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE — — — 150 GRAM MAX

RELEASE FORCE — — — 15 GRAM MIN

DIFFERENTIAL TRAVEL — — — .002-.010


OVERTRAVEL — — — .050 MIN

FREE POSITION — — — .625 MAX

RELEASE TRAVEL — — — .010 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

L112

10A 1/3 HP 125 OR 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"**SCALE FULL**DO NOT
SCALE PRINTUNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

RAW MATERIAL - COMMERCIAL STANDARD

DIMENSIONS ARE IN INCHES AND ARE
TO BE MET BEFORE PROTECTIVE
COATINGS ARE APPLIED

MICRO SWITCH STANDARDS APPLY

WEIGHT .016 LB

FC-52848-B
DRAWN

KEW 14 NOV 85