

## Description


The 8SLVD1204-33 is a high-performance differential LVDS fanout buffer. The device is designed for the fanout of high-frequency, very low additive phase-noise clock and data signals. The 8SLVD1204-33 is characterized to operate from a 3.3V power supply. Guaranteed output-to-output and part-to-part skew characteristics make the 8SLVD1204-33 ideal for those clock distribution applications demanding well-defined performance and repeatability.

Two selectable differential inputs and four low skew outputs are available. The integrated bias voltage reference enables easy interfacing of single-ended signals to the device inputs. The device is optimized for low power consumption and low additive phase noise.


## Features

- Four low skew, low additive jitter LVDS output pairs
- Two selectable differential clock input pairs
- Differential PCLKx, nPCLKx pairs can accept the following differential input levels: LVDS, LVPECL
- Maximum input clock frequency: 2GHz
- LVC MOS/LVTTL interface levels for the control input select pin
- Output skew: 20ps (maximum)
- Propagation delay: 310ps (maximum)
- Low additive phase jitter, RMS;  $f_{REF} = 156.25\text{MHz}$ ,  $V_{PP} = 1\text{V}$ , 10kHz - 20MHz: 100fs (maximum)
- Full 3.3V supply voltage
- Lead-free (RoHS 6), 16-Lead VFQFPN packaging
- -40°C to 85°C ambient operating temperature

## Block Diagram

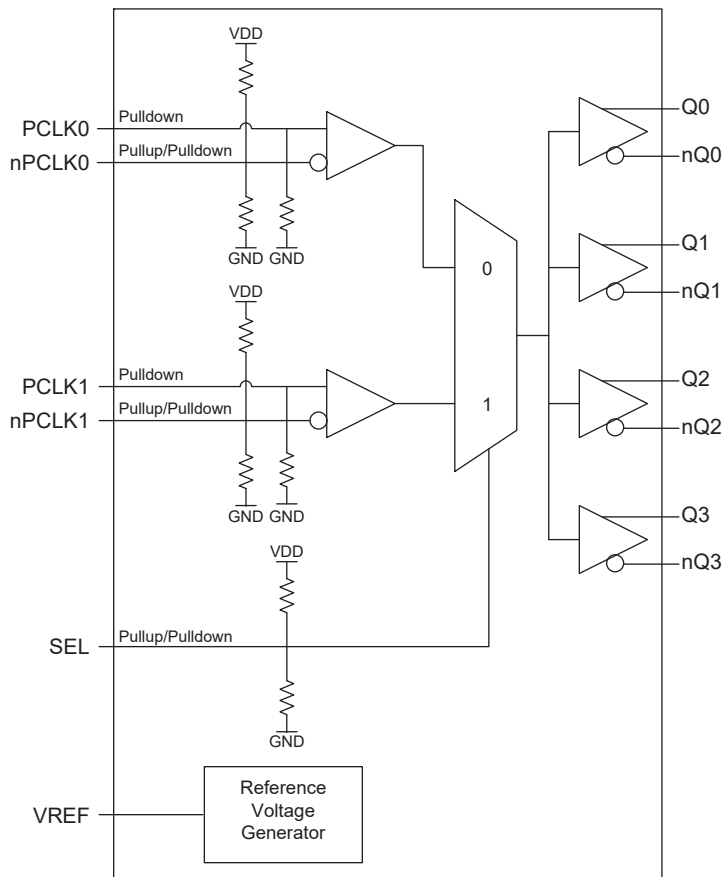

## Pin Assignment

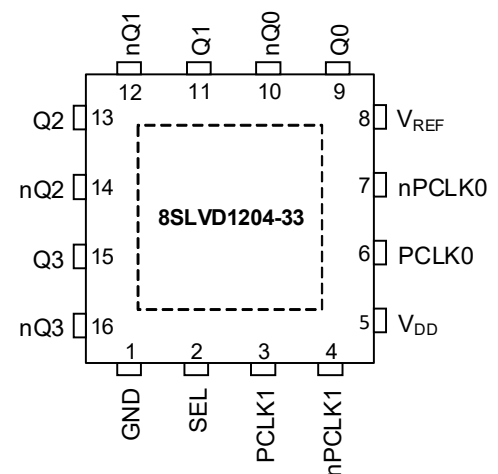

16-pin, 3 x 3 mm VFQFPN Package

## Pin Description and Pin Characteristic Tables

**Table 1. Pin Descriptions**

| Number | Name      | Type   |                     | Description                                                                            |
|--------|-----------|--------|---------------------|----------------------------------------------------------------------------------------|
| 1      | GND       | Power  |                     | Power supply ground.                                                                   |
| 2      | SEL       | Input  | Pullup/<br>Pulldown | Reference select control pin. See Table 3 for function. LVCMOS/LVTTL interface levels. |
| 3      | PCLK1     | Input  | Pulldown            | Non-inverting differential clock/data input.                                           |
| 4      | nPCLK1    | Input  | Pullup/<br>Pulldown | Inverting differential clock/data input. $V_{DD}/2$ default when left floating.        |
| 5      | $V_{DD}$  | Power  |                     | Power supply pin.                                                                      |
| 6      | PCLK0     | Input  | Pulldown            | Non-inverting differential clock/data input.                                           |
| 7      | nPCLK0    | Input  | Pullup/<br>Pulldown | Inverting differential clock/data input. $V_{DD}/2$ default when left floating.        |
| 8      | $V_{REF}$ | Output |                     | Bias voltage reference for the PCLKx, nPCLKx inputs.                                   |
| 9, 10  | Q0, nQ0   | Output |                     | Differential output pair 0. LVDS interface levels.                                     |
| 11, 12 | Q1, nQ1   | Output |                     | Differential output pair 1. LVDS interface levels.                                     |
| 13, 14 | Q2, nQ2   | Output |                     | Differential output pair 2. LVDS interface levels.                                     |
| 15, 16 | Q3, nQ3   | Output |                     | Differential output pair 3. LVDS interface levels.                                     |

NOTE: *Pulldown* and *Pullup* refer to internal input resistors. See Table 2, *Pin Characteristics*, for typical values.

**Table 2. Pin Characteristics**

| Symbol         | Parameter               | Test Conditions | Minimum | Typical | Maximum | Units      |
|----------------|-------------------------|-----------------|---------|---------|---------|------------|
| $C_{IN}$       | Input Capacitance       |                 |         | 2       |         | pF         |
| $R_{PULLDOWN}$ | Input Pulldown Resistor |                 |         | 51      |         | k $\Omega$ |
| $R_{PULLUP}$   | Input Pullup Resistor   |                 |         | 51      |         | k $\Omega$ |

## Function Table

**Table 3. SEL Input Selection Function Table**

| Input          | Operation                                                                            |
|----------------|--------------------------------------------------------------------------------------|
| SEL            |                                                                                      |
| 0              | PCLK0, nPCLK0 is the selected differential clock input.                              |
| 1              | PCLK1, nPCLK1 is the selected differential clock input.                              |
| Open (default) | Internally set to $V_{DD}/2$ .<br>Input buffers are disabled and outputs are static. |

NOTE: SEL is an asynchronous control.

## Absolute Maximum Ratings

Exposure to absolute maximum rating conditions for extended periods may affect product reliability. Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of product at these conditions or any conditions beyond those listed in the *DC Characteristics* or *AC Characteristics* is not implied.

| Item                                                  | Rating                   |
|-------------------------------------------------------|--------------------------|
| Supply Voltage, $V_{DD}$                              | 4.6V                     |
| Inputs, $V_I$                                         | -0.5V to $V_{DD} + 0.5V$ |
| Outputs, $I_O$<br>Continuous Current<br>Surge Current | 10mA<br>15mA             |
| $V_{REF}$ Current (Sink/Source), $I_{REF}$            | $\pm 2mA$                |
| Maximum Junction Temperature, $T_{J,MAX}$             | 150°C                    |
| Storage Temperature, $T_{STG}$                        | -65°C to 150°C           |
| ESD - Human Body Model, NOTE 1                        | 2000V                    |
| ESD - Charged Device Model, NOTE 1                    | 1500V                    |

NOTE 1: According to JEDEC/JESD JS-001-2012/22-C101E.

## Recommended Operating Conditions

| Symbol | Parameter               | Minimum | Typical | Maximum | Units |
|--------|-------------------------|---------|---------|---------|-------|
| $T_A$  | Ambient air temperature | -40     |         | 85      | °C    |
| $T_J$  | Junction temperature    |         |         | 125     | °C    |

NOTE 1: It is the user's responsibility to ensure that device junction temperature remains below the maximum allowed.

NOTE 2: All conditions in the table must be met to guarantee device functionality.

NOTE 3: The device is verified to the maximum operating junction temperature through simulation.

## Electrical Characteristics

**Table 4A. Power Supply Characteristics,  $V_{DD} = 3.3V \pm 5\%$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol   | Parameter            | Test Conditions                                                             | Minimum | Typical | Maximum | Units |
|----------|----------------------|-----------------------------------------------------------------------------|---------|---------|---------|-------|
| $V_{DD}$ | Power Supply Voltage |                                                                             | 3.135   | 3.3     | 3.465   | V     |
| $I_{DD}$ | Power Supply Current | SEL = 0 or 1; $f_{REF} = 100MHz$ ; Q0 to Q3 terminated 100Ω between nQx, Qx |         | 86      | 100     | mA    |
|          |                      | SEL = 0 or 1; $f_{REF} = 800MHz$ ; Q0 to Q3 terminated 100Ω between nQx, Qx |         | 86      | 100     | mA    |
|          |                      | SEL = 0 or 1; $f_{REF} = 2GHz$ ; Q0 to Q3 terminated 100Ω between nQx, Qx   |         | 86      | 100     | mA    |

**Table 4B. LVCMOS/LVTTL DC Characteristics,  $V_{DD} = 3.3V \pm 5\%$ ,  $T_A = -40^{\circ}C$  to  $85^{\circ}C$** 

| Symbol   | Parameter          |     | Test Conditions                | Minimum        | Typical | Maximum        | Units   |
|----------|--------------------|-----|--------------------------------|----------------|---------|----------------|---------|
| $V_{IH}$ | Input High Voltage | SEL |                                | $0.7 * V_{DD}$ |         | $V_{DD} + 0.3$ | V       |
| $V_{IL}$ | Input Low Voltage  | SEL |                                | -0.3           |         | $0.2 * V_{DD}$ | V       |
| $I_{IH}$ | Input High Current | SEL | $V_{DD} = V_{IN} = 3.465V$     |                |         | 150            | $\mu A$ |
| $I_{IL}$ | Input Low Current  | SEL | $V_{DD} = 3.465V, V_{IN} = 0V$ | -150           |         |                | $\mu A$ |

**Table 4C. Differential Input DC Characteristics,  $V_{DD} = 3.3V \pm 5\%$ ,  $T_A = -40^{\circ}C$  to  $85^{\circ}C$** 

| Symbol    | Parameter                             |                                      | Test Conditions                | Minimum         | Typical         | Maximum         | Units   |
|-----------|---------------------------------------|--------------------------------------|--------------------------------|-----------------|-----------------|-----------------|---------|
| $I_{IH}$  | Input High Current                    | PCLK0,<br>nPCLK1<br>PCLK1,<br>nPCLK1 | $V_{DD} = V_{IN} = 3.465V$     |                 |                 | 150             | $\mu A$ |
| $I_{IL}$  | Input Low Current                     | PCLK0,<br>PCLK1                      | $V_{DD} = 3.465V, V_{IN} = 0V$ | -10             |                 |                 | $\mu A$ |
|           |                                       | nPCLK0,<br>nPCLK1                    | $V_{DD} = 3.465V, V_{IN} = 0V$ | -150            |                 |                 | $\mu A$ |
| $V_{REF}$ | Reference Voltage for Input Bias      |                                      | $I_{REF} = \pm 1mA$            | $V_{DD} - 1.50$ | $V_{DD} - 1.35$ | $V_{DD} - 1.15$ | V       |
| $V_{PP}$  | Peak-to-Peak Voltage;<br>NOTE 1       |                                      | $f_{REF} < 1.5 GHz$            | 0.1             |                 | 1.5             | V       |
|           |                                       |                                      | $f_{REF} \geq 1.5 GHz$         | 0.2             |                 | 1.5             | V       |
| $V_{CMR}$ | Common Mode Input Voltage; NOTES 1, 2 |                                      |                                | 1.0             |                 | $V_{DD} - 0.6$  | V       |

NOTE 1:  $V_{IL}$  should not be less than -0.3V.

NOTE 2: Common mode input voltage is defined at the crosspoint.

**Table 4D. LVDS DC Characteristics,  $V_{DD} = 3.3V \pm 5\%$ ,  $T_A = -40^{\circ}C$  to  $85^{\circ}C$** 

| Symbol          | Parameter                   | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------------|-----------------------------|-----------------|---------|---------|---------|-------|
| $V_{OD}$        | Differential Output Voltage |                 | 247     |         | 454     | mV    |
| $\Delta V_{OD}$ | $V_{OD}$ Magnitude Change   |                 |         |         | 50      | mV    |
| $V_{OS}$        | Offset Voltage              |                 | 1.15    |         | 1.45    | V     |
| $\Delta V_{OS}$ | $V_{OS}$ Magnitude Change   |                 |         |         | 50      | mV    |

## AC Electrical Characteristics

**Table 5. AC Electrical Characteristics,  $V_{DD} = 3.3V \pm 5\%$ ,  $T_A = -40^{\circ}C$  to  $85^{\circ}C$**

| Symbol              | Parameter                                                                 |                       | Test Conditions                                                                       | Minimum | Typical | Maximum | Units |
|---------------------|---------------------------------------------------------------------------|-----------------------|---------------------------------------------------------------------------------------|---------|---------|---------|-------|
| $f_{REF}$           | Input Frequency                                                           | PCLK[0:1], nPCLK[0:1] |                                                                                       |         |         | 2       | GHz   |
| $\Delta V/\Delta t$ | Input Edge Rate                                                           | PCLK[0:1], nPCLK[0:1] |                                                                                       | 1.5     |         |         | V/ns  |
| $t_{PD}$            | Propagation Delay; NOTE 1                                                 |                       | PCLK[0:1], nPCLK[0:1] to any Qx, nQx for $V_{PP} = 0.1V$ or $0.3V$                    | 120     | 215     | 310     | ps    |
| $t_{sk(o)}$         | Output Skew; NOTES 2, 3                                                   |                       |                                                                                       |         |         | 20      | ps    |
| $t_{sk(i)}$         | Input Skew; NOTE 3                                                        |                       |                                                                                       |         |         | 20      | ps    |
| $t_{sk(p)}$         | Pulse Skew                                                                |                       | $f_{REF} = 100MHz$                                                                    |         |         | 15      | ps    |
| $t_{sk(pp)}$        | Part-to-Part Skew; NOTES 3, 4                                             |                       |                                                                                       |         |         | 160     | ps    |
| $t_{JIT}$           | Buffer Additive Phase Jitter, RMS; refer to Additive Phase Jitter Section |                       | $f_{REF} = 122.88MHz$ Square Wave, $V_{PP} = 1V$ , Integration Range: 1kHz – 40MHz    |         | 139     | 190     | fs    |
|                     |                                                                           |                       | $f_{REF} = 122.88MHz$ Square Wave, $V_{PP} = 1V$ , Integration Range: 10kHz – 20MHz   |         | 95      | 140     | fs    |
|                     |                                                                           |                       | $f_{REF} = 122.88MHz$ Square Wave, $V_{PP} = 1V$ , Integration Range: 12kHz – 20MHz   |         | 95      | 140     | fs    |
|                     |                                                                           |                       | $f_{REF} = 156.25MHz$ Square Wave, $V_{PP} = 1V$ , Integration Range: 1kHz – 40MHz    |         | 90      | 130     | fs    |
|                     |                                                                           |                       | $f_{REF} = 156.25MHz$ Square Wave, $V_{PP} = 1V$ , Integration Range: 10kHz – 20MHz   |         | 67      | 100     | fs    |
|                     |                                                                           |                       | $f_{REF} = 156.25MHz$ Square Wave, $V_{PP} = 1V$ , Integration Range: 12kHz – 20MHz   |         | 67      | 100     | fs    |
|                     |                                                                           |                       | $f_{REF} = 156.25MHz$ Square Wave, $V_{PP} = 0.5V$ , Integration Range: 1kHz – 40MHz  |         | 94      | 140     | fs    |
|                     |                                                                           |                       | $f_{REF} = 156.25MHz$ Square Wave, $V_{PP} = 0.5V$ , Integration Range: 10kHz – 20MHz |         | 70      | 105     | fs    |
|                     |                                                                           |                       | $f_{REF} = 156.25MHz$ Square Wave, $V_{PP} = 0.5V$ , Integration Range: 12kHz – 20MHz |         | 70      | 105     | fs    |
| $t_R / t_F$         | Output Rise/ Fall Time                                                    |                       | 20% to 80% outputs loaded with $100\Omega$                                            | 40      |         | 250     | ps    |
| $MUX_{ISOLATION}$   | Mux Isolation; NOTE 5                                                     |                       | $f_{REF} = 100MHz$                                                                    |         | 74      |         | dB    |

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

NOTE 1: Measured from the differential input crosspoint to the differential output crosspoint.

NOTE 2: Defined as skew between outputs at the same supply voltage and with equal load conditions. Measured at the differential crosspoint.

NOTE 3: This parameter is defined in accordance with JEDEC Standard 65.


NOTE 4: Defined as skew between outputs on different devices operating at the same supply voltage, same frequency, same temperature and with equal load conditions. Using the same type of inputs on each device, the outputs are measured at the differential crosspoint.

NOTE 5: Qx, nQx outputs measured differentially. See *MUX Isolation diagram* in the *Parameter Measurement Information* section.

## Additive Phase Jitter

The spectral purity in a band at a specific offset from the fundamental compared to the power of the fundamental is called the **dBc Phase Noise**. This value is normally expressed using a Phase noise plot and is most often the specified plot in many applications. Phase noise is defined as the ratio of the noise power present in a 1Hz band at a specified offset from the fundamental frequency to the power value of the fundamental. This ratio is expressed in decibels (dBm) or a ratio


of the power in the 1Hz band to the power in the fundamental. When the required offset is specified, the phase noise is called a **dBc** value, which simply means dBm at a specified offset from the fundamental. By investigating jitter in the frequency domain, we get a better understanding of its effects on the desired application over the entire time record of the signal. It is mathematically possible to calculate an expected bit error rate given a phase noise plot.

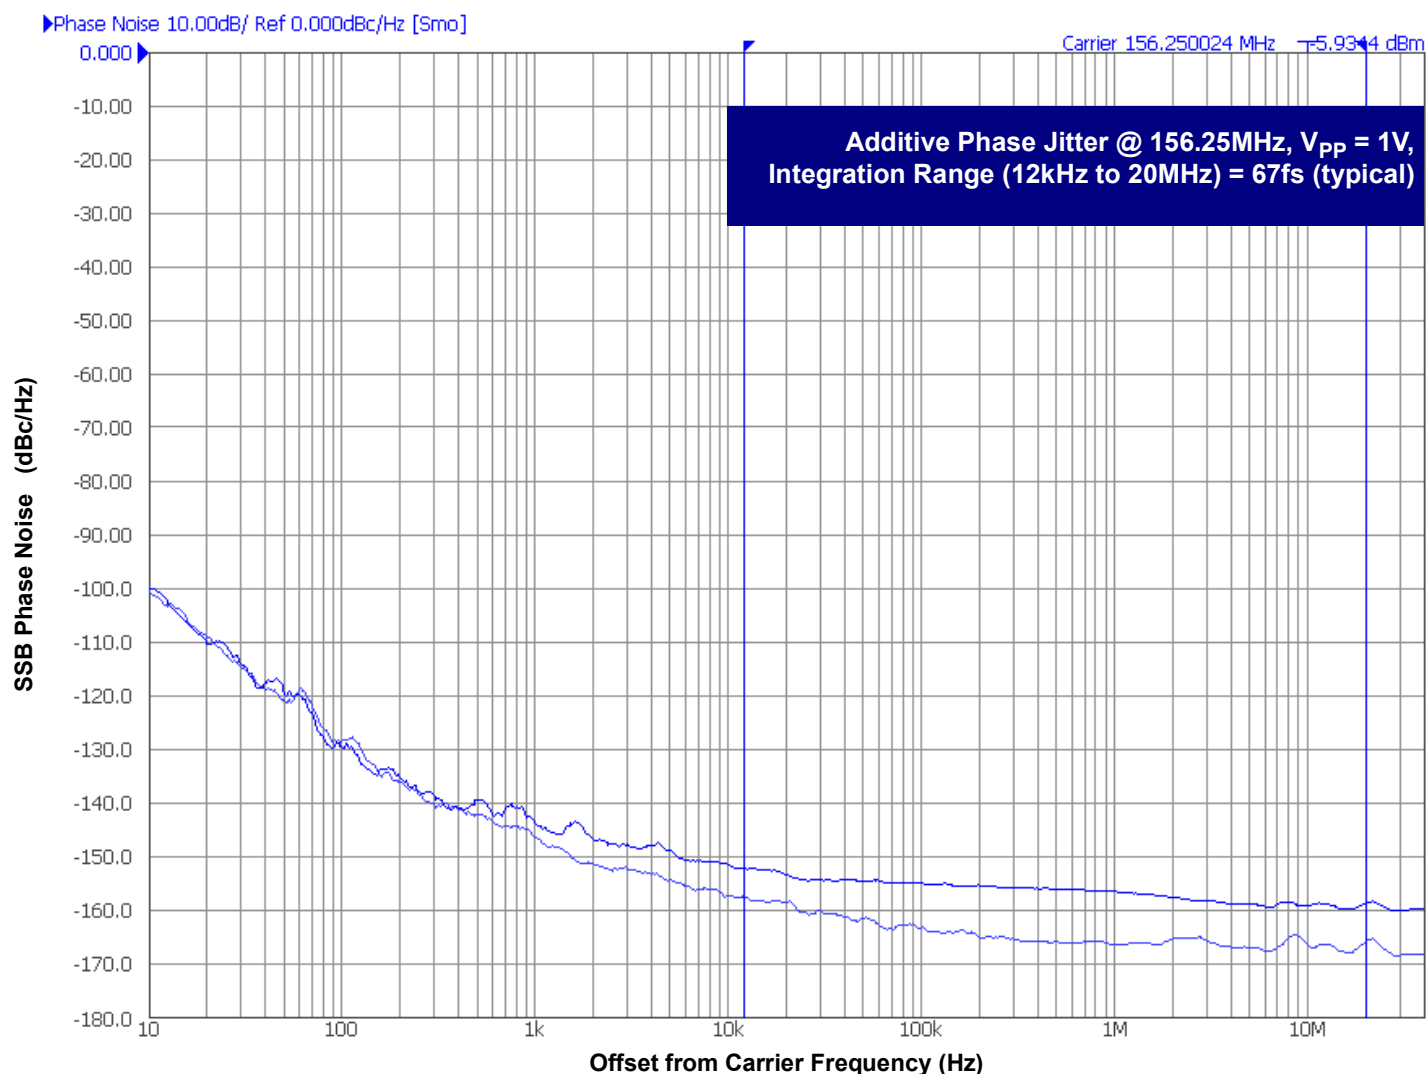


As with most timing specifications, phase noise measurements have issues relating to the limitations of the measurement equipment. The noise floor of the equipment can be higher or lower than the noise floor of the device. Additive phase noise is dependent on both the noise floor of the input source and measurement equipment.

Measured using a Wenzel 156.25MHz Oscillator as the input source.


# Parameter Measurement Information

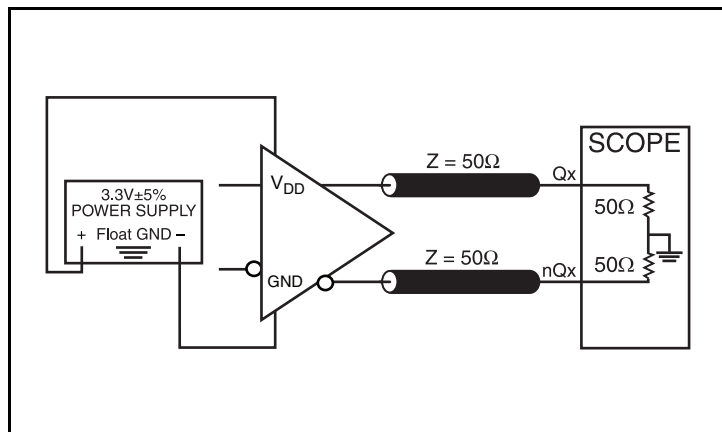


LVDS Output Load Test Circuit

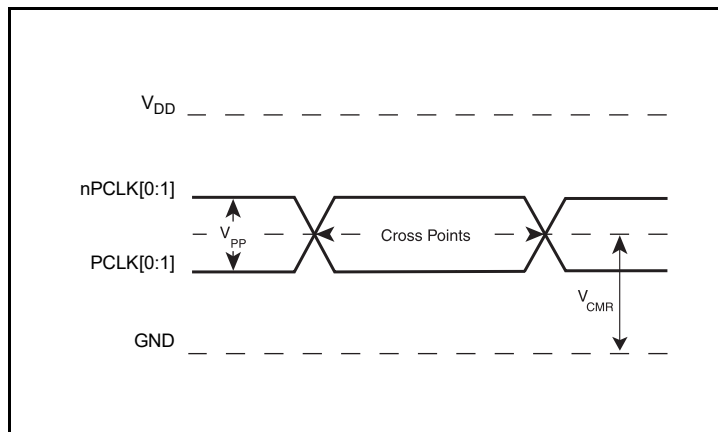


Differential Input Level

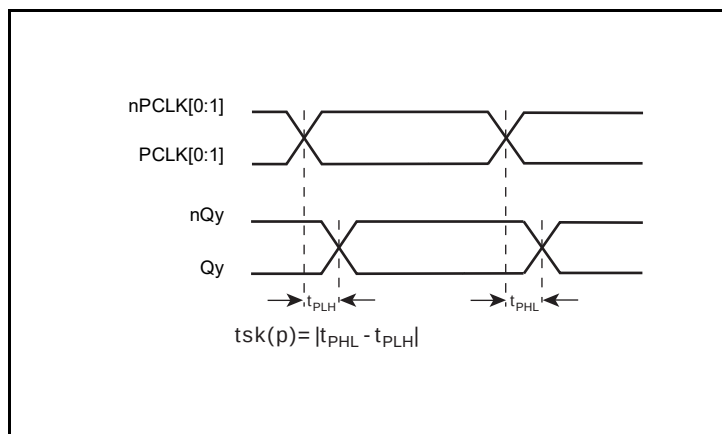


Pulse Skew

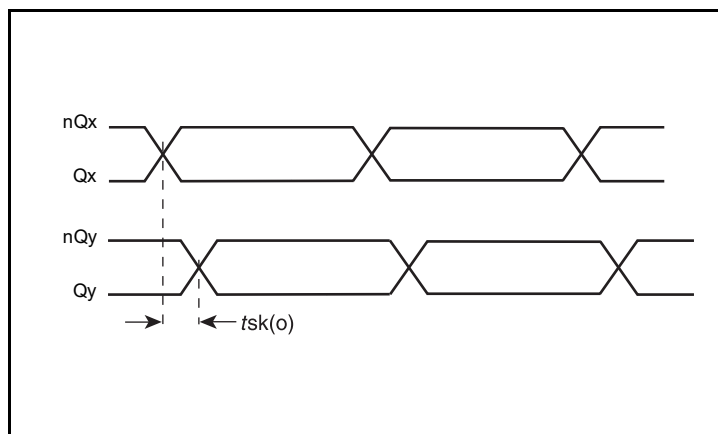

Output Skew

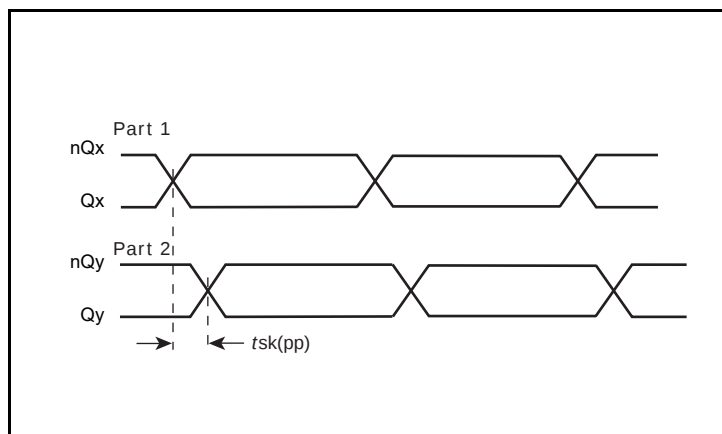


Part-to-Part Skew

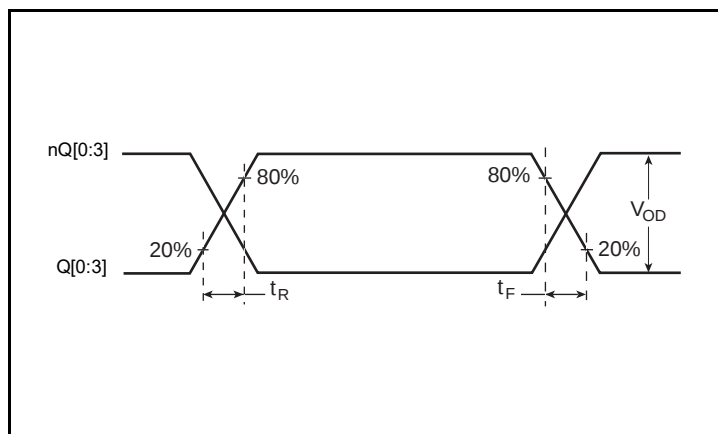


Output Rise/Fall Time


## Parameter Measurement Information, continued

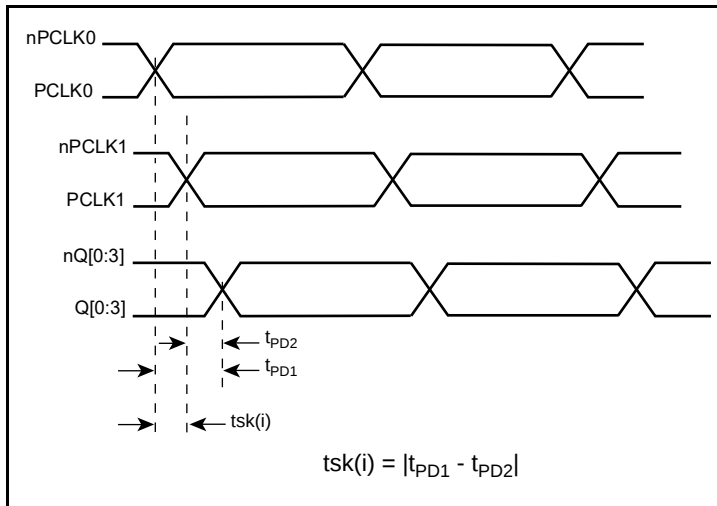


**Input Skew**

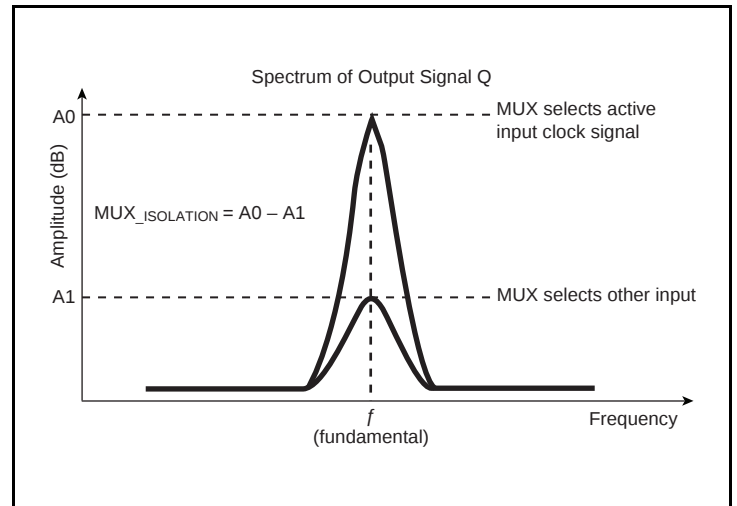


**MUX Isolation**

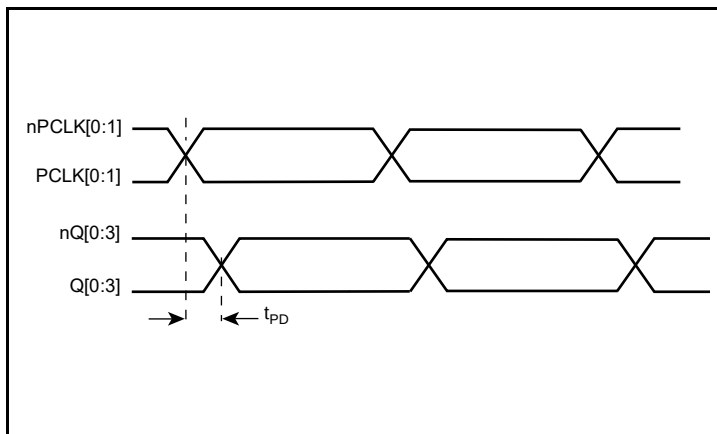

**Propagation Delay**

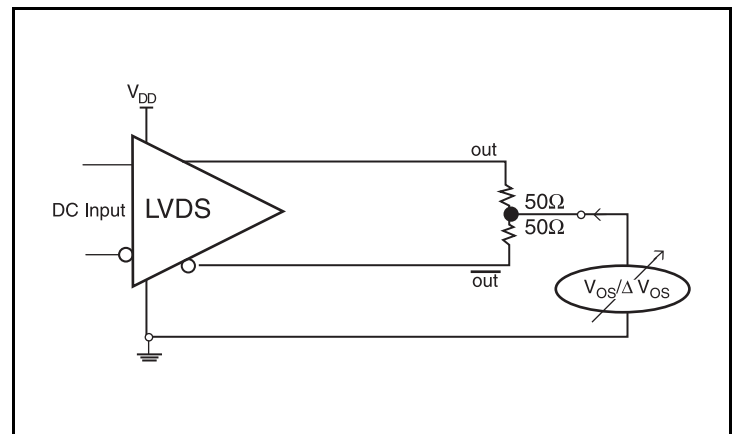

**Offset Voltage Setup**

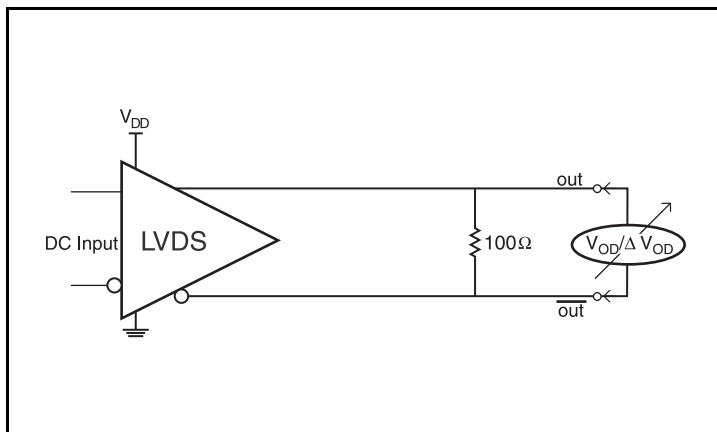

**Differential Output Voltage Setup**

## Applications Information

### Recommendations for Unused Input and Output Pins

#### Inputs:

##### PCLK/nPCLK Inputs

For applications not requiring the use of a differential input, both the PCLK and nPCLK pins can be left floating. Though not required, but for additional protection, a 1k $\Omega$  resistor can be tied from PCLK to ground.

#### Outputs:

##### LVDS Outputs

All unused LVDS output pairs can be either left floating or terminated with 100 $\Omega$  across. If they are left floating, there should be no trace attached.

### Wiring the Differential Input to Accept Single-Ended Levels

Figure 1 shows how a differential input can be wired to accept single ended levels. The reference voltage  $V1 = V_{DD}/2$  is generated by the bias resistors R1 and R2. The bypass capacitor (C1) is used to help filter noise on the DC bias. This bias circuit should be located as close to the input pin as possible. The ratio of R1 and R2 might need to be adjusted to position the V1 in the center of the input voltage swing. For example, if the input clock swing is 2.5V and  $V_{DD} = 2.5V$ , R1 and R2 value should be adjusted to set V1 at 1.25V. The values below are for when both the single ended swing and  $V_{DD}$  are at the same voltage. This configuration requires that the sum of the output impedance of the driver ( $R_o$ ) and the series resistance ( $R_s$ ) equals the transmission line impedance. In addition, matched termination at the input will attenuate the signal in half. This can be done in one of two ways. First, R3 and R4 in parallel should equal the transmission

line impedance. For most 50 $\Omega$  applications, R3 and R4 can be 100 $\Omega$ . The values of the resistors can be increased to reduce the loading for slower and weaker LVCMOS driver. When using single-ended signaling, the noise rejection benefits of differential signaling are reduced. Even though the differential input can handle full rail LVCMOS signaling, it is recommended that the amplitude be reduced. The datasheet specifies a lower differential amplitude, however this only applies to differential signals. For single-ended applications, the swing can be larger, however  $V_{IL}$  cannot be less than -0.3V and  $V_{IH}$  cannot be more than  $V_{DD} + 0.3V$ . Though some of the recommended components might not be used, the pads should be placed in the layout. They can be utilized for debugging purposes. The datasheet specifications are characterized and guaranteed by using a differential signal.


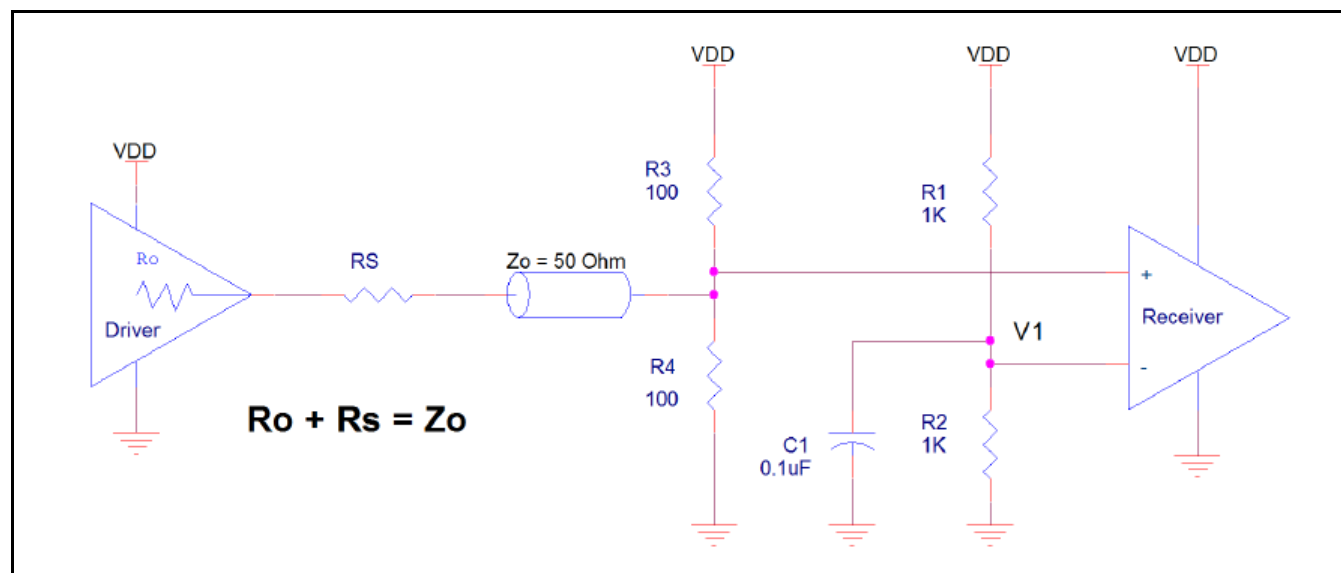


Figure 1. Recommended Schematic for Wiring a Differential Input to Accept Single-ended Levels


### 3.3V LVPECL Clock Input Interface

The PCLK/nPCLK accepts LVPECL, LVDS and other differential signals. Both differential outputs must meet the  $V_{PP}$  and  $V_{CMR}$  input requirements. *Figures 2A to 2E* show interface examples for the PCLK/nPCLK input driven by the most common driver types. The


input interfaces suggested here are examples only. If the driver is from another vendor, use their termination recommendation. Please consult with the vendor of the driver component to confirm the driver termination requirements.

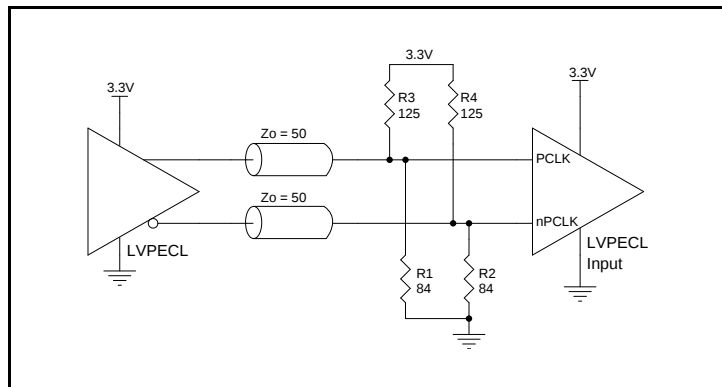


**Figure 2A. PCLK/nPCLK Input Driven by a 3.3V LVPECL Driver**

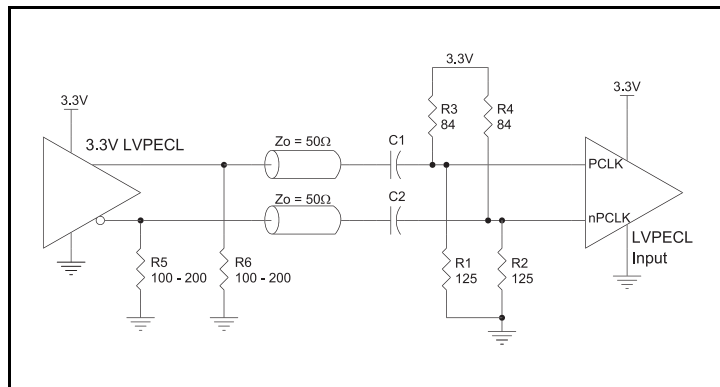


**Figure 2B. PCLK/nPCLK Input Driven by a 3.3V LVPECL Driver with AC Couple**

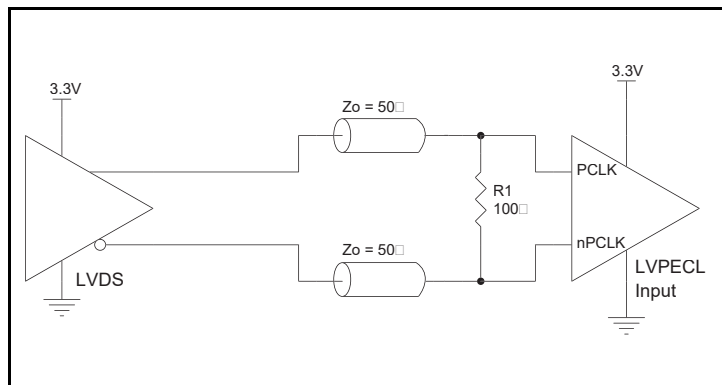

**Figure 2C. PCLK/nPCLK Input Driven by a 3.3V LVDS Driver**

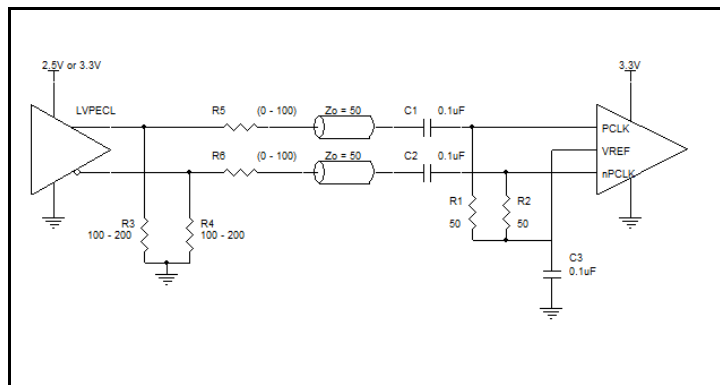

**Figure 2D. PCLK/nPCLK Input Driven by a 3.3V LVPECL Driver with AC Coupling**

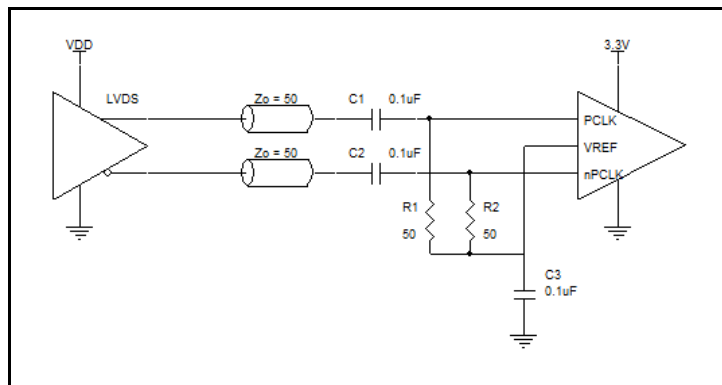


**Figure 2E. PCLK/nPCLK Input Driven by a 3.3V LVDS Driver with AC Coupling**

## LVDS Driver Termination

For a general LVDS interface, the recommended value for the termination impedance ( $Z_T$ ) is between  $90\Omega$  and  $132\Omega$ . The actual value should be selected to match the differential impedance ( $Z_0$ ) of your transmission line. A typical point-to-point LVDS design uses a  $100\Omega$  parallel resistor at the receiver and a  $100\Omega$  differential transmission-line environment. In order to avoid any transmission-line reflection issues, the components should be surface mounted and must be placed as close to the receiver as possible. IDT offers a full line of LVDS compliant devices with two types of output structures: current source and voltage source. The

standard termination schematic as shown in *Figure 3A* can be used with either type of output structure. *Figure 3B*, which can also be used with both output types, is an optional termination with center tap capacitance to help filter common mode noise. The capacitor value should be approximately  $50\text{pF}$ . If using a non-standard termination, it is recommended to contact IDT and confirm if the output structure is current source or voltage source type. In addition, since these outputs are LVDS compatible, the input receiver's amplitude and common-mode input range should be verified for compatibility with the output.

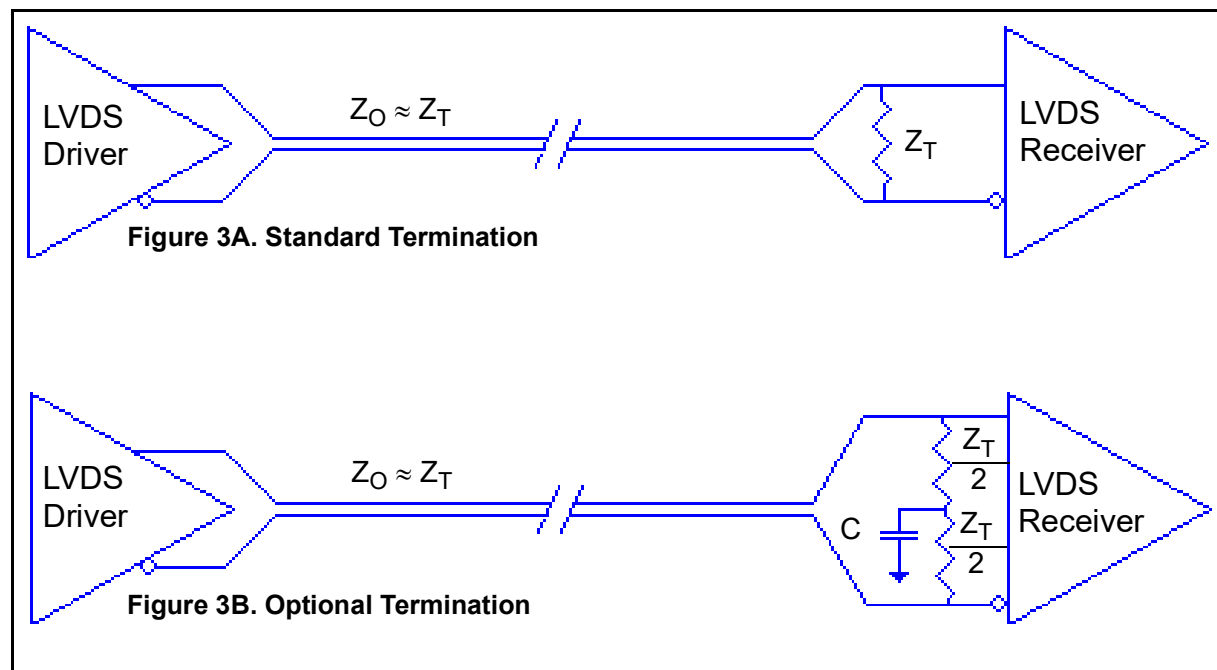


## LVDS Termination

## VFQFPN EPAD Thermal Release Path

In order to maximize both the removal of heat from the package and the electrical performance, a land pattern must be incorporated on the Printed Circuit Board (PCB) within the footprint of the package corresponding to the exposed metal pad or exposed heat slug on the package, as shown in *Figure 4*. The solderable area on the PCB, as defined by the solder mask, should be at least the same size/shape as the exposed pad/slug area on the package to maximize the thermal/electrical performance. Sufficient clearance should be designed on the PCB between the outer edges of the land pattern and the inner edges of pad pattern for the leads to avoid any shorts.

While the land pattern on the PCB provides a means of heat transfer and electrical grounding from the package to the board through a solder joint, thermal vias are necessary to effectively conduct from the surface of the PCB to the ground plane(s). The land pattern must be connected to ground through these vias. The vias act as “heat pipes”. The number of vias (i.e. “heat pipes”) are application specific

and dependent upon the package power dissipation as well as electrical conductivity requirements. Thus, thermal and electrical analysis and/or testing are recommended to determine the minimum number needed. Maximum thermal and electrical performance is achieved when an array of vias is incorporated in the land pattern. It is recommended to use as many vias connected to ground as possible. It is also recommended that the via diameter should be 12 to 13mils (0.30 to 0.33mm) with 1oz copper via barrel plating. This is desirable to avoid any solder wicking inside the via during the soldering process which may result in voids in solder between the exposed pad/slug and the thermal land. Precautions should be taken to eliminate any solder voids between the exposed heat slug and the land pattern. Note: These recommendations are to be used as a guideline only. For further information, please refer to the Application Note on the Surface Mount Assembly of Amkor's Thermally/Electrically Enhance Leadframe Base Package, Amkor Technology.

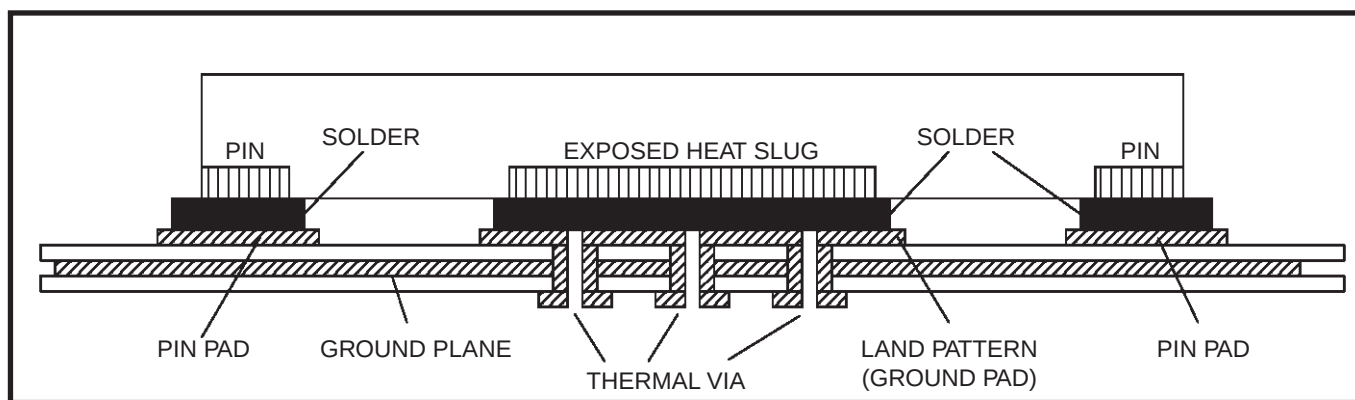

**Figure 4. P.C. Assembly for Exposed Pad Thermal Release Path – Side View (drawing not to scale)**

## Power Considerations

This section provides information on power dissipation and junction temperature for the 8SLVD1204-33. Equations and example calculations are also provided.

### 1. Power Dissipation.

The total power dissipation for the 8SLVD1204-33 is the sum of the core power plus the output power dissipation due to the load. The following is the power dissipation for  $V_{DD} = 3.3V + 5\% = 3.465V$ , which gives worst case results.

- Power<sub>(core)MAX</sub> =  $V_{DD\_MAX} * I_{DD\_MAX} = 3.465V * 100mA = \mathbf{346.5mW}$   
**Total Power<sub>MAX</sub> = 346.5mW**

### 2. Junction Temperature.

Junction temperature,  $T_j$ , is the temperature at the junction of the bond wire and bond pad directly affects the reliability of the device. The maximum recommended junction temperature is 125°C. Limiting the internal transistor junction temperature,  $T_j$ , to 125°C ensures that the bond wire and bond pad temperature remains below 125°C.

The equation for  $T_j$  is as follows:  $T_j = \theta_{JA} * Pd\_total + T_A$

$T_j$  = Junction Temperature

$\theta_{JA}$  = Junction-to-Ambient Thermal Resistance

$Pd\_total$  = Total Device Power Dissipation (example calculation is in section 1 above)

$T_A$  = Ambient Temperature

In order to calculate junction temperature, the appropriate junction-to-ambient thermal resistance  $\theta_{JA}$  must be used. Assuming no air flow and a multi-layer board, the appropriate value is 74.7°C/W per Table 6 below.

Therefore,  $T_j$  for an ambient temperature of 85°C with all outputs switching is:

$$85^{\circ}C + 0.3465W * 74.7^{\circ}C/W = 110.9^{\circ}C. \text{ This is below the limit of } 125^{\circ}C.$$

This calculation is only an example.  $T_j$  will obviously vary depending on the number of loaded outputs, supply voltage, air flow and the type of board (multi-layer).

**Table 6. Thermal Resistance  $\theta_{JA}$  for 16 Lead VFQFPN, Forced Convection**

| $\theta_{JA}$ at 0 Air Flow                 |          |          |          |
|---------------------------------------------|----------|----------|----------|
| Meters per Second                           | 0        | 1        | 2.5      |
| Multi-Layer PCB, JEDEC Standard Test Boards | 74.7°C/W | 65.3°C/W | 58.5°C/W |

## Reliability Information

**Table 7.  $\theta_{JA}$  vs. Air Flow Table for a 16 Lead VFQFPN**

| $\theta_{JA}$ at 0 Air Flow                 |          |          |          |
|---------------------------------------------|----------|----------|----------|
| Meters per Second                           | 0        | 1        | 2.5      |
| Multi-Layer PCB, JEDEC Standard Test Boards | 74.7°C/W | 65.3°C/W | 58.5°C/W |

## Transistor Count

The transistor count for the 8SLVD1204-33 is: 417

# Package Outline Drawings

The package outline drawings are located at the end of this document and are accessible from the Renesas website (see Ordering Information for POD links). The package information is the most current data available and is subject to change without revision of this document.

# Ordering Information

Table 8. Ordering Information


| Part/Order Number  | Marking | Package                | Shipping Packaging                           | Temperature   |
|--------------------|---------|------------------------|----------------------------------------------|---------------|
| 8SLVD1204-33NLGI   | 2433I   | "Lead-Free" 16-VFQFPN  | Tube                                         | -40°C to 85°C |
| 8SLVD1204-33NLGI8  | 2433I   | "Lead-Free" 16-VFQFPN  | Tape & Reel,<br>pin 1 orientation: EIA-481-C | -40°C to 85°C |
| 8SLVD1204-33NLGI/W | 2433I   | "Lead-Free" 116-VFQFPN | Tape & Reel,<br>pin 1 orientation: EIA-481-D | -40°C to 85°C |

Table 9. Pin 1 Orientation in Tape and Reel Packaging

| Part Number Suffix | Pin 1 Orientation      | Illustration |
|--------------------|------------------------|--------------|
| 8                  | Quadrant 1 (EIA-481-C) |              |
| /W                 | Quadrant 2 (EIA-481-D) |              |

## Revision History


| Revision Date     | Description of Change                                                                                                                                                                                                                                                                    |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| April 7, 2022     | <ul style="list-style-type: none"> <li>Updated Part-to-Part Skew maximum value from 230 to 160 ps in Table 5.</li> <li>Updated <a href="#">Package Outline Drawings</a> section.</li> <li>Added package outline drawings links to <a href="#">Ordering Information</a> table.</li> </ul> |
| November 29, 2018 | <ul style="list-style-type: none"> <li>Updated the description of <a href="#">Absolute Maximum Ratings</a></li> <li>Added <a href="#">Recommended Operating Conditions</a></li> <li>Updated the description of <a href="#">Package Outline Drawings</a></li> </ul>                       |
| January 21, 2018  | <ul style="list-style-type: none"> <li>Updated the package outline drawings; however, no technical changes.</li> <li>Replaced the package term VFQFN with VFQFPN.</li> </ul>                                                                                                             |
| March 11, 2015    | Updated Pin Assignment format.<br>AC Characteristics Table - corrected $t_{JIT}$ units from ps to fs.<br>Updated datasheet header/footer.<br>Deleted prefix/suffix from part number.                                                                                                     |
| February 26, 2014 | Ordering Info: Changed Tray to Tube.                                                                                                                                                                                                                                                     |
| February 12, 2014 | 3.3V LVPECL Clock Input Interface application note - added figures 2D and 2E.                                                                                                                                                                                                            |

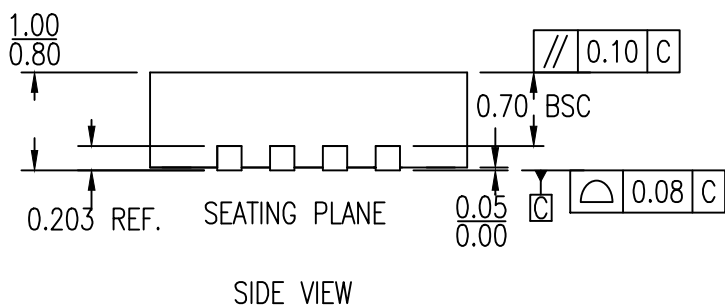

16-VFQFPN Package Outline Drawing

3.0 x 3.0 x 0.9 mm, 0.5mm Pitch, 1.70 x 1.70 mm Epad

NL/NLG16P2, PSC-4169-02, Rev 05, Page 2

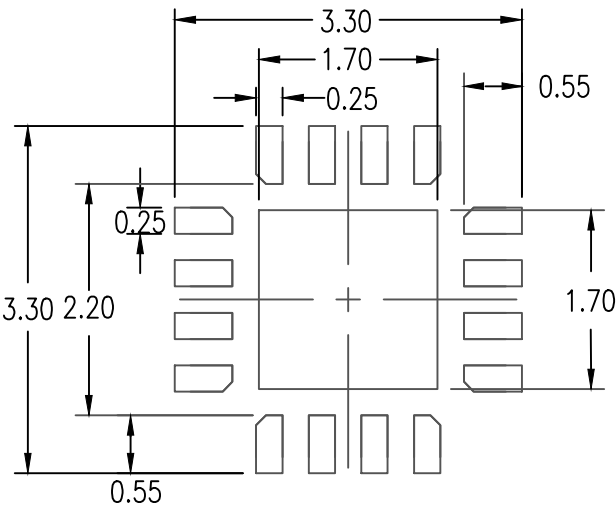

RECOMMENDED LAND PATTERN DIMENSION

- NOTES:
- 1. ALL DIMENSIONS ARE IN mm. ANGLES IN DEGREES
  - 2. TOP DOWN VIEW-AS VIEWED ON PCB
  - 3. LAND PATTERN RECOMMENDATION IS PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN

| Package Revision History |         |                                                           |
|--------------------------|---------|-----------------------------------------------------------|
| Date Created             | Rev No. | Description                                               |
| Oct 25, 2017             | Rev 04  | Remove Bookmak at Pdf Format & Update Thickness Tolerance |
| Jan 18, 2018             | Rev 05  | Change QFN to VFQFPN                                      |

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.