


CATALOG NUMBER	MATERIAL NUMBER	CABLE RANGE	NOMINAL ROD DIAMETER	LENGTH "M"	LENGTH "B"	BREAK STRENGTH* (LBS/N)	UL LISTED	CSA APPROVED	PRODUCT SELECTION NUMBER
35970	1300950194	.25-.36 / 6.4-9.1	.31 / 7.9	5.0±1.00 / 127±25	3.25±0.50 / 83±13	1700 / 7561	NO	YES	PJ25
35971	1300950196	.37-.49 / 9.4-12.4	.43 / 10.9	7.0±1.00 / 178±25	3.75±0.50 / 95±13	1700 / 7561			PJ37
35972	1300950197	.50-.61 / 12.7-15.5	.56 / 14.2	8.0±1.50 / 203±38	4.25±0.50 / 108±13	1700 / 7561			PJ50
35973	1300950198	.62-.74 / 15.7-18.8	.68 / 17.3	10.0±1.50 / 254±38	5.00±0.50 / 127±13	2800 / 12455			PJ62
35974	1300950200	.75-.99 / 19.1-25.1	.87 / 22.1	10.0±1.50 / 254±38	5.75±0.50 / 146±13	4100 / 18238			PJ75
35975	1300950201	1.00-1.24 / 25.4-31.5	1.12 / 28.4	12.0±1.50 / 305±38	6.50±1.00 / 165±25	4100 / 18238			PJ100

*TO DETERMINE RECOMMENDED WORKING LOAD, DIVIDE BREAK STRENGTH BY 5.

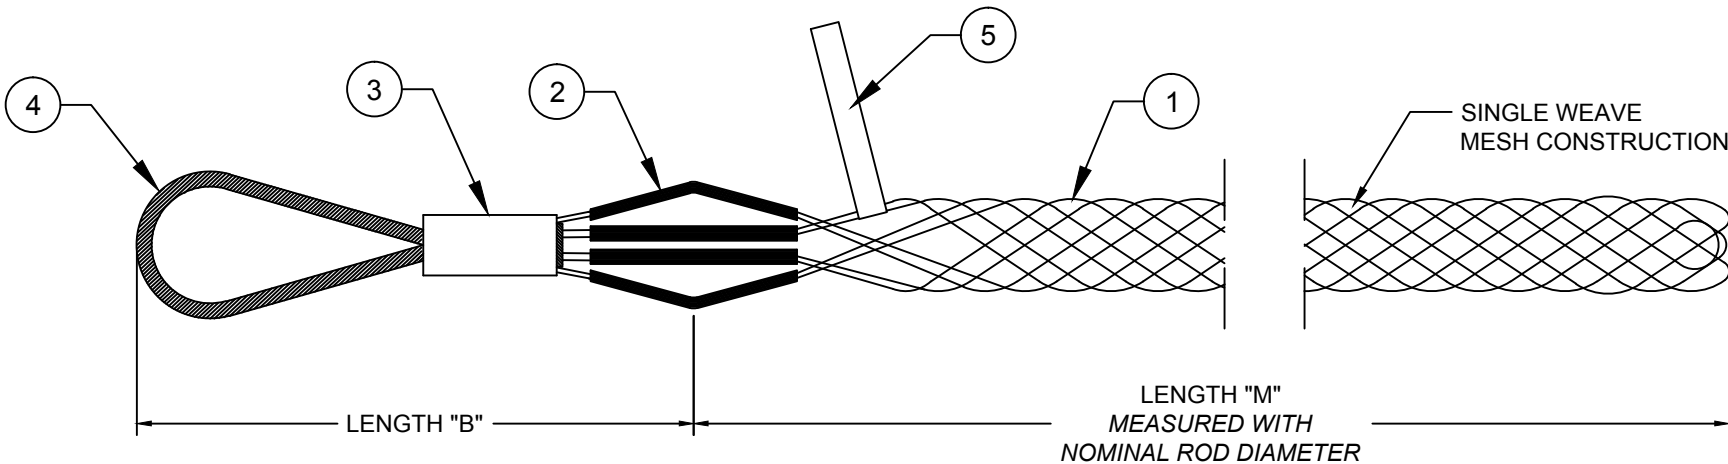

ITEM DESCRIPTION MATERIAL			RELEASE SALES DRAWINGS EC NO: IPG2014-1487 DRWN: HRUIZ01 2014/05/13 CHKD: HKNEELAN 2014/05/13 APPR: JFMURPHY 2014/10/14 REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><th></th><th>mm</th><th>INCH</th></tr><tr><td>4 PLACES</td><td>±---</td><td>±---</td></tr><tr><td>3 PLACES</td><td>±---</td><td>±.005</td></tr><tr><td>2 PLACES</td><td>±.13</td><td>±.010</td></tr><tr><td>1 PLACE</td><td>±.25</td><td>±.020</td></tr><tr><td colspan="3">ANGULAR ±1/2°</td></tr><tr><td colspan="3">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td></tr></table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±.005	2 PLACES	±.13	±.010	1 PLACE	±.25	±.020	ANGULAR ±1/2°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			DIMENSION STYLE INCH/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
	mm	INCH																														
4 PLACES	±---	±---																														
3 PLACES	±---	±.005																														
2 PLACES	±.13	±.010																														
1 PLACE	±.25	±.020																														
ANGULAR ±1/2°																																
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																																
1	WIRE MESH	GALVANIZED STEEL			DRAWN BY DATE HRUIZ01 2014/05/13		TITLE PULLING GRIPS JUNIOR DUTY FLEXIBLE EYE																									
2	SHOULDER PROTECTOR	NYLON			CHECKED BY DATE HKNEELAN 2014/05/13																											
3	FERRULE	ALUMINUM			APPROVED BY DATE JFMURPHY 2014/10/14		molex MOLEX INCORPORATED DOCUMENT NO. SD-130095-100 SHEET NO. 1 OF 1																									
4	BALE WIRE	GALVANIZED STEEL			MATERIAL NO. SEE TABLE																											
5	LABEL	MYLAR			SIZE A THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																											